

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
28 February 2002 (28.02.2002)

PCT

(10) International Publication Number
WO 02/15945 A1

(51) International Patent Classification⁷: A61L 2/04, 2/16, 11/00, A01C 3/02, C05F 1/02, 3/06 // A61L 101:20

(74) Agent: HØIBERG APS; St. Kongensgade 59 B, DK-1264 Copenhagen K (DK).

(21) International Application Number: PCT/DK01/00553

(22) International Filing Date: 22 August 2001 (22.08.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
PA 2000 01246 22 August 2000 (22.08.2000) DK
PA 2000 00171 1 February 2001 (01.02.2001) DK

(71) Applicant (for all designated States except US): GREEN FARM ENERGY A/S [DK/DK]; Over Hadstenvej 84, DK-8370 Hadsten (DK).

(72) Inventors; and

(75) Inventors/Applicants (for US only): BONDE, Torben, A. [DK/DK]; Lange-Müllers Allé 27, DK-2960 Rungsted Kyst (DK). PEDERSEN, Lars, Jørgen [DK/DK]; Lerbjerggaard, Hadstenvej 15, DK-8370 Hadsten (DK).

(81) Designated States (national): AE, AG, AL, AM, AT, AT (utility model), AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, CZ (utility model), DE, DE (utility model), DK, DK (utility model), DM, DZ, EC, EE, EE (utility model), ES, FI, FI (utility model), GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SK (utility model), SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.


(84) Designated States (regional): ARIPO patent (GI, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for all designations

[Continued on next page]

(54) Title: CONCEPT FOR SLURRY SEPARATION AND BIOGAS PRODUCTION

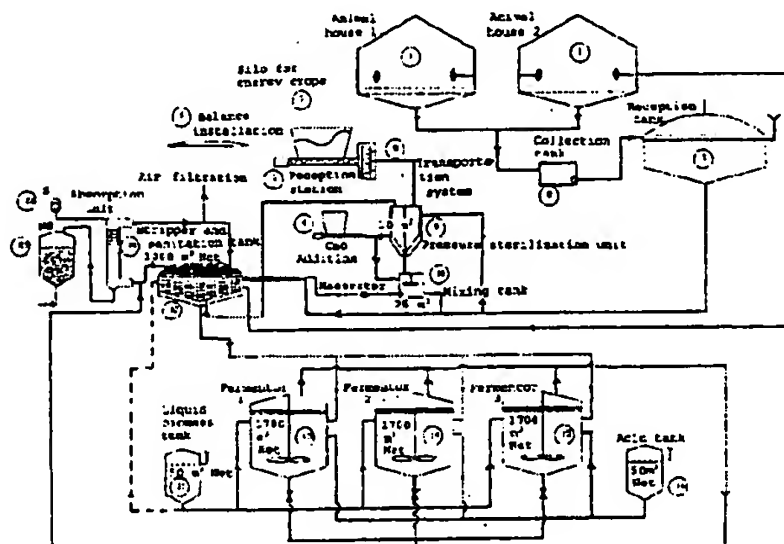

(57) Abstract: The present invention concerns an anaerobic digestion of animal manures, energy crops and similar organic substrates. The process is capable of refining nutrients comprised in the digested biomass to fertilizers of commercial quality. The invention also provides a method for oprocessing animal carcasses or fractions thereof including meat and bone meal etc., with the objective of providing an alternative means for processing the organic waste material of animal origin while at the same time facilitating the production of fertilizers. The risk of spreading BSE prions or any other prions to animals or humans is thus substantially reduced if not eliminated. The biogas and slurry separation system according to the present invention is preferably integrated with the operations of animal husbandries into a total concept in which the internal and external performances of animal husbandries are optimised. The internal performances concern quality aspects related to the management of the animal houses and include industrial hygiene, animal welfare, gaseous and dust emissions and food safety. The external performances concern mainly energy production and emissions to the environment of nutrients and greenhouse gases and the sale of high quality food product.



- as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii)) for all designations

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

Concept for slurry separation and biogas production

Technical Field of the Invention

5 In a first aspect, the present invention concerns an anaerobic digestion of animal manures, energy crops and similar organic substrates. The process is capable of refining nutrients comprised in the digested biomass to fertilizers of commercial quality. The biogas and slurry separation system according to the present invention is preferably integrated with the operations of animal husbandries into a total concept in which the internal and external performances of animal husbandries are optimised.

15 One additional aspect of the invention is the possible application for disposing off animal waste in the form of animal carcasses, slaughterhouse waste, meat and bone meal, etc. The waste is refined in the plant to fertilizers to be applied to agricultural land. A possible content of BSE-prions or other prions is substantially reduced if not eliminated in the whole process. The animal produce is in this concept not used as fodder but fertilizer. The destruction of possible BSE prions in the biomass treated in the plant in combination with the use of the refined biomass as fertilizer in stead of fodder substantially reduces if not eliminates the risk of infecting animals or humans with BSE-prions or modifications hereof.

25 The internal performances concern quality aspects related to the management of the animal houses and include industrial hygiene, animal welfare, control of gaseous and dust emissions and food safety. The external performances concern mainly energy production and control of emissions to the environment of nutrients and greenhouse gasses and the sale of high quality food products as well as an alternative way for disposing of animal carcasses and the like.

30 Background of the Invention

Ammonia stripping

35 The chemistry of ammonia is well known and stripping of ammonia from different fluids is a well known industrial process. It has for example been employed by the sugar industry (Bunert et al. 1995; Chacuk et al. 1994; Benito and Cubero 1996) and

by municipalities as treatment of landfill reject (Cheung et al. 1997). Ammonia may also be stripped from pig slurry based on the same principles as in the industry (Liao et al. 1995).

- 5 The basic principle for large scale stripping of ammonia is increasing pH and aerating and heating of the wastewater or the slurry. It is often $\text{Ca}(\text{OH})_2$ or CaO which is used to increase pH. Other bases may be employed such as NaOH or KOH . The lime, however, is used on an industrial scale by for instance the cement industry and is therefore cheap and readily available as bulk ware.

10

Where the stripped ammonia is absorbed and an ammonia concentrate is produced sulphuric acid is often used in the absorption column. Sulphuric acid is an industrial bulk ware and is available in a technical quality appropriate for use in absorption columns stripping ammonia from slurry and other waste waters (e.g. Sacuk et al. 15 1994).

20

Based on the experience gained in the sugar industry it has been found that the most appropriate parameter values are: Temperature 70°C ; a pH in the range of about 10 - 12; and a liquid gas ration of 1:800, 96% affectivity.

For stripping of ammonia from slurry it is found that the optimal parameter values at low temperature are: temperature 22°C ; pH of about 10 - 12; liquid gas ratio of 1:2000, 90% affectivity, 150 h operation (Liao et al. 1995).

25 References:

Benito G. G. and Cubero M. T. G. (1996) Ammonia elimination from beet sugar factory condensate streams by a stripping-reabsorbing system. *Zuckerindustrie* 121, 721-726.

30

Bunert U., Buczys R., Bruhns M., and Buchholz K. (1995) Ammonia stripping. *Zuckerindustrie* 120, 960-969.

Chacuk A., Zarzycki R., and Iciek J. (1994) A mathematical model of absorption stripping columns for removal of ammonia from condensates. *Zuckerindustrie* 119, 1008-1015.

- 5 Cheung K. C., Chu L. M., and Wong M. H. (1997) Ammonia stripping as a pre-treatment for landfill leachate. *Water Air and Soil Pollution* 94, 209-221.

- Liao, P. H., Chen A., and Lo K. V. (1995) Removal of nitrogen from swine manure wastewaters by ammonia stripping. *Biotechnology & Applied Microbiology* 54, 17-
10 20.

Alkali and thermal hydrolyses

- 15 Thermal pre-treatment of biomass before anaerobic digestion is a technology which is well described in the literature, e.g. Li and Noike (1992). In recent years thermal pre-treatment of municipal waste has also been used on a commercial scale by Cambi AS, Billingstad, Norway.

- 20 Wang et al. (1997a and b) found that thermal pre-treatment of municipal waste at 60° C and a hydraulic residence time of 8 days resulted in an increased methane production of 52.1 %. A similar result was found by Tanaka et al. (1997), the combination however with alkali hydrolyses gave the highest increase in gas yield (200%). McCarty et al. have performed a series of studies showing that the combination of thermal and alkali hydrolysis increases the gas yield substantially. The pH however,
25 shall be about 10 to 12, and preferably 11 or higher, before the chemical hydrolysis shall produce a significant additional gas yield.

- 30 The results of Wang et al. (1997) shows that the default parameter values for ammonia stripping under section 2.1 (the pH of about 10 to 12, preferably 11 or more, and the temperature of about 70° C or more during a week) will increase the gas yield.

References:

Li Y. Y., and Noike T. (1992) Upgrading of anaerobic digestion of waste activated sludge by thermal pre-treatment. *Water Science and Technology* 26, 3-4.

5 McCarty P. L., Young L. Y., Gossett J. M., Stuckey D. C., and Healy Jr. J. B. Heat treatment for increasing methane yield from organic materials. Stanford University, California 94305, USA.

10 Tanaka S., Kobayashi T. Kamiyama K. and Bildan M. L. N. S. (1997) Effects of thermo chemical pre-treatment on the anaerobic digestion of waste activated sludge. *Water Science and Technology* 35, 209-215.

15 Wang Q., Noguchi C., Hara Y., Sharon C., Kakimoto K., and Kato Y. (1997a) Studies on anaerobic digestion mechanisms: Influence of pre-treatment temperature on biodegradation of waste activated sludge. *Environmental Technology* 18, 999-1008.

Wang Q., Noguchi C. K., Kuninobu M., Hara Y., Kakimoto K. Ogawa H. I. And Kato Y. (1997b) Influence of hydraulic retention time on anaerobic digestion of pre-treated sludge. *Biotechnology Techniques* 11, 105-108.

20 *Sanitation*

Sanitation of slurry before transporting and field application constitute an important strategy for reducing the risk of spreading zoo noses and veterinary vira, bacteria and parasites (e.g. Bendixen 1999). Anaerobe digestion has proven effective in reducing the number of zoo noses in slurries but it does not eliminate these organisms (Bendixen 1999; Pagilla et al. 2000). The use of CaO for sanitation of sewage sludge has also shown that Ascaris eggs and parasites (Eriksen et al. 1996) and virus are reduced substantially but not completely (Turner and Burton 1997).

30 *References:*

Bendixen H. J. Hygienic safety – results of scientific investigations in Denmark (sanitation requirements in Danish biogas plants). Hohenheimer Seminar IEA Bio-energy Workshop March 1999.

Eriksen L., Andreassen P. Ilsoe B. (1996) Inactivation of *Ascaris suum* eggs during storage in lime treated sewage sludge. *Water Research* 30, 1026-1029.

5 Pagilla K. R., Kim H., and Cheunbarn T. (2000) Aerobic thermophile and anaerobic mesophile treatment of swine waste. *Water Research* 34, 2747-2753.

Turner C. and Burton C. H. (1997) The inactivation of viruses in pig slurries: a review. *Bioresource Technology* 61, 9-20.

10

Foam

Foam formation associated with anaerobic digestion may constitute a serious problem for operating the fermentors. A number of substances for remediation of foam
15 are commercially available including different polymers, plant oils (e.g. rape oil) and different salts (e.g. Vardar-Sukan 1998). However, polymers may cause environmental concerns and are often expensive and ineffective.

References:

20

Vardar-Sukan F. (1998) Foaming: consequences, prevention and destruction. *Biotechnology Advances* 16, 913-948.

25

Flocculation

Calcium-ions are a well known as means to flocculate substances and particles due to the formation of calcium-bridges between organic and inorganic substances in solution or suspension thus forming "flocks" of particles (e.g. Sanin and Vesilind
30 (Higgins and Novak 1997)).

References:

35 Higgins M. J. and Novak J. T. (1997). The effects of cations on the settling and dewatering of activated sludge's: Laboratory results. *Water Environment Research* 69, 215-224.

Sanin F. D., and Vesilind P. A. (1996) Synthetic sludge: A physical/chemical model in understanding bio flocculation. Water Environment Research 68, 927-933.

5 *Decanter centrifuge slurry separation, P stripping*

Decanter centrifuges have been applied to a number of industrial processes during the last 100 years.

10 Among recent examples of the use of decanter centrifuges is the Novo Nordisk plant in Kalundborg where all waste from the large insulin fermentation units is treated. Also municipal sludge is dewatered by means of decanter centrifuges (Alfa Laval A/S). The decanter centrifuges separate the dry (solid) matter from the sludge or wastes, while the water phase or the reject water is lead to a conventional sewage
15 treatment plant.

Experiments with separation of cattle, pig and degassed slurry show firstly that decanter centrifuges can treat all manures without any difficulties. It has also been found that the centrifuges remove approximately 70% dry matter, 60-80% total P
20 and only 14% of total N from a slurry previously digested thermopile (Møller et al. 1999; Møller 2000a). The corresponding values for raw slurry from cattle and pigs were somewhat lower. It should be noted that only 14% of total N is removed from the waste.

25 The total treatment cost has been calculated to 5 Dkr. per m³ slurry at a slurry volume of 20.000 tons or more. In those situations where the slurry volume exceeds 20.000 tons the decanter centrifuges are cost efficient and cheap instruments for separation of dry matter and total P from slurry (Møller et al. 1999).

30 Under normal circumstances it is without any interest to treat slurry in a decanter centrifuge, because it is not associated with any volume reduction or other advantages to the farmers. The ammonia loss following field application of treated slurry may be somewhat reduced due to an increased infiltration rate into the soil (Møller 2000b), but this is by far sufficient incentive to farmers for use of decanter centri-
35 fuges.

References

5 Møller H. B. (2000a) Opkoncentrering af næringsstoffer i husdyrgødning med dekantercentrifuge og skruepresse. Notat 12. september 2000, Forskningscenter Bygholm.

Møller H. B. (2000b) Gode resultater med at separere gylle. Maskinbladet 25. august 2000.

10 Møller H. B., Lund I., and Sommer S. G. (1999) Solid-liquid separation of livestock slurry: efficiency and cost.

Alfa Laval A/S Gylleseparering. Separeringsresultater med dekantercentrifuge.

15 *P-precipitation*

Dissolved P is precipitated almost immediately following addition of Ca as calcium phosphate $\text{Ca}_3(\text{PO}_4)_2$ (Cheung et al. 1995).

20 References:

Cheung K. C., Chu L. M., and Wong M. H. (1997) Ammonia stripping as a pre-treatment for landfill leachate. Water Air and Soil Pollution 94, 209-221.

25 *Prevention of struvite formation*

It is an additional important aspect that the P precipitation in combination with the stripping of ammonia prevents the formation of struvite (MgNH_4PO_4). Struvite constitutes a significant working problem in heat-exchangers, transport in pipes, etc.
30 (Krüger 1993). The mechanism is P-removal through formation of CaPO_4 as well as removal of ammonia through the stripping process. The P and ammonia removal prevents formation of struvite.

Krüger (1993) Struvit dannelse i biogasfællesanlæg. Krüger WasteSystems AS.
35

Reject water filtration

- 5 Systems for final treatment and membrane filtration of reject water have been presented over the past 10 years in the form of e.g. membrane plants (BioScan A/S, Ansager ApS) and plants based on steam compression (Funkki A/S, Bjørnkjær Maskinfabrikker A/S). These systems generally result in a gross cost per m³ slurry of 50 – 100 Dkr. The plants are further not able to treat other types of manure but pig slurry.
- 10 The reduction of volume obtained by these plants is often not more than 50-60%, meaning that field application of the remains in any case depends on conventional devices. Hence, these plants are not competitive due to the cost level and/or a limited volume reduction.
- 15 However, it is important to consider and recognise the cost level of these plants. It is also valuable to consider the energy use in the form electricity which the mechanical steam compression gives rise to, i.e. about 50 kWh per tons treated slurry. This means that membranes, under the assumption that the water phase to be filtered consists of salts and minimal amounts of dry matter only, which do not produce
- 20 scaling or fouling problems, may be able to out compete evaporation technologies.

References

- 25 Argaman Y. (1984) Single sludge nitrogen removal in an oxidation ditch. *Water Research* 18, 1493-1500.
- Blouin M., Bisailon J. G., Beudet R., and Ishague M. (1988) Aerobic biodegradation of organic matter of swine waste. *Biological Wastes* 25, 127-139.
- 30 Bouhabila E. H., Aim R. B., and Buisson H. (1998) Micro filtration of activated sludge using submerged membrane with air bubbling (application to wastewater treatment). *Desalination* 118, 315-322.
- 35 Burton C. H., Sneath R. W., Misselbrook T. H., and Pain B. F. (1998) *Journal of Agricultural Engineering Research* 71, 203.

- Camarro L., Diaz J. M. and Romero F. (1996) Final treatments for anaerobically digested piggery effluents. *Biomass and Bioenergy* 11, 483-489.
- 5 Doyle Y. and de la Noüe J. (1987) Aerobic treatment of swine manure: Physico-chemical aspects. *Biological Wastes* 22, 187-208.
- Engelhardt N., Firk W., and Warnken W (1998) Integration of membrane filtration into the activated sludge process in municipal wastewater treatment. *Water Science and Technology* 38, 429-436.
- 10 Garraway J. L. (1982) Investigations on the aerobic treatment of pig slurry. *Agricultural Wastes* 4, 131-142.
- Ginnivan M. J. (1983) The effect of aeration on odour and solids of pig slurries. *Agricultural Wastes* 7, 197-207.
- 15 Gönenc I. E. and Harremoës P. (1985) Nitrification in rotating disc systems—I. Criteria for transition from oxygen to ammonia rate limitation. *Water Research* 19, 1119-1127.
- 20 Scott J. A.; Neilson D. J. Liu W., and Boon P. N. (1998) A dual function membrane bioreactor system for enhanced aerobic remediation of high-strength industrial waste. *Water Science and Technology* 38, 413-420.
- 25 Silva C. M., Reeve D. W., Husain H., Rabie H. R., and Woodhouse K. A. (2000) *Journal of Membrane Science* 173, 87-98.
- Visvanathan C., Yang B-S., Muttamara S., and Maythanukhraw R. (1997) Application of air back flushing in membrane bioreactor. *Water Science and Technology* 36, 259-266.
- 30 Zaloum R., Coron-Ramström A.-F. Gehr R. (1996) Final clarification by integrated filtration within the activated sludge aeration tank. *Environmental Technology* 17, 1007-1014.

Lime cooking

A thermal and chemical hydrolysis at temperatures less than 100° C and therefore pressures at about 1 atm represents one option for increasing the availability of the organic matter for biogas generation. However, the complex carbohydrates such as cellulose, hemicelluloses and lignin is not completely hydrolysed by such treatments. Fibres from straw, maize and other crops are not made available for methane formation by such treatments (Bjerre et al 1996; Schmidt and Thomsen 1998; Thomsen and Schmidt 1999; Sirohi and Rai 1998). An alkali lime cooking at moderate temperatures above 100° C is well suited to render these substrates available to microbial decomposition (Curelli et al. 1997; Chang et al. 1997; Chang et al. 1998).

This treatment, when applied to cellulose fibres from sugar cane cut to 0.5 mm (with 4% CaO, 200° C and 16 bar), disintegrates the cellulose to small organic acids as formic acid, acetic acid, lactic acid etc. The methane generation from treated cellulose is thus as high as 70% of the corresponding amount of carbohydrates as pure glucose (Azzam and Naser 1993). Also, green crops can be treated in a lime cooker, but at lower temperatures. It has been shown that the optimal result was achieved when water hyacinths were exposed to pH 11 and 121° C (Patel et al. 1993).

Formation of PAH and of substances inhibitory to methane bacteria may be formed at elevated temperatures (Varhegyi et al. 1993; Patel et al. 1993). However, this phenomena has not been seen at the relatively moderate temperatures used in lime cooking as compared the pyrolysis (Azzam et al. 1993). During pyrolysis the temperatures are so high that the biomass disintegrates directly to gasses as hydrogen, methane and carbon monoxide but unfortunately also to PAH and other pollutants.

References

- Azzam A. M. and Nasr M. I. (1993) Physicothermochemical pre-treatments of food processing waste for enhancing anaerobic digestion and biogas fermentation. *Journal of Environmental Science and Engineering* 28, 1629-1649.
- Bjerre A. B., Olesen A. B., Fernquist T., Ploger A., Schmidt A. S. (1996) Pre-treatment of wheat straw using combined wet oxidation and alkaline hydrolysis re-

sulting in convertible cellulose and hemicelluloses. *Biotechnology and Bioengineering* 49, 568-577.

5 Chang V. S., Nagwani M., Holtzapple M. T. (1998) Original articles – Lime pre-treatment of crop residues bagasse and wheat straw. *Applied Biochemistry and Biotechnology Part A – Enzyme Engineering and Biotechnology* 74, 135-160.

10 Chang V. S., Barry B., Holtzapple M. T. (1997) Lime pre-treatment of switchgrass. *Applied Biochemistry and Biotechnology Part A – Enzyme Engineering and Biotechnology* 63-65, 3-20.

15 Curelli N., Fadda M. B., Rescigno A., Rinaldi A. C., soddu G., Sollai E., Vaccargiu S., Sanjust E., Rinaldi A. (1997) Mild alkaline/oxidative pre-treatment of wheat straw. *Process Biochemistry* 32, 665-670.

Patel V., Desai M., and Madamwar D. (1993) Thermo chemical pre-treatment of water hyacinth for improved biomethanation. *Applied Biochemistry and Biotechnology* 42, 67-74.

20 Schmidt A. S. and Thomsen A. B. (1998) Optimisation of wet oxidation pre-treatment of wheat straw. *Bioresource Technology* 64, 139-152.

25 Sirohi S. K. and Rai S. N. (1998) Optimisation of treatment conditions of wheat straw with lime: Effect of concentration, moisture content and treatment time on chemical composition and in vitro digestibility. *Animal Feed Science and Technology* 74, 57-62.

30 Thomsen A. B. and Schmidt A. S. (1999) Further development of chemical and biological processes for production of bio ethanol: optimisation of pre-treatment processes and characterisation of products. Risø National Laboratory, Roskilde, Denmark.

35 Varhegyi G., Szabo P., Mok W. S. L., and Antal M. J. (1993) Kinetics of the thermal decomposition of cellulose in sealed vessels at elevated pressures. *Journal of Analytical and Applied Pyrolysis* 26, 159-174.

Energy crop silage

5 The conventional use of energy crops is mainly in the form of solid fuel for burning
(willow as wood chops, straw or whole seed) or as fuel for engines (rape oil). On an
experimental basis beets and straw is used for production of ethanol (Parsby; Sims
2001; Gustavsson et al. 1995; Wyman and Goodman 1993; Kuch 1998). In other
parts of the world the use of energy crops is widespread and subject to much re-
search. The use of terrestrial as well as marine and freshwater plants is well docu-
10 mented (Gunaseelan 1997; Jewell et al. 1993; Jarvis et al 1997). Some studies
would appear to indicate that anaerobic fermentation of energy crops is competitive
to other uses of biomass (Chynoweth D. P., Owens J. M., and Legrand R. 2001).

15 The use of energy crops is well motivated. The use of straw is organised in a way
which probably makes this practise a concept to be seen for a number of years to
come. The use of wood chops seems to be economical and practical viable. Incin-
eration of grain cereals on the other hand has given rise to ethical objections. The
production of grain cereals is also inevitable associated with the use of fertilizers
and pesticides and N-losses from the fields. N is also lost during the burning of the
20 biomass.

References

25 Beck J. Co-fermentation of liquid manure and beets as a regenerative energy. Uni-
versity of Hohenheim, Dep. Agricultural Engineering and Animal Production. Per-
sonal communication.

30 Chynoweth D. P., Owens J. M., and Legrand R. (2001) Renewable methane from
anaerobic digestion of biomass. Renewable Energy 22, 1-8.

Gunaseelan V. N. (1997) Anaerobic digestion of biomass for methane production: A
review. Biomass and Bioenergy 13, 83-114.

35 Gustavsson L., Borjesson P., Bengt J., Svenningsson P. (1995) Reducing CO₂
emissions by substituting biomass for fossil fuels. Energy 20, 1097-1113.

- Jewell W. J., Cummings R. J., and Richards B. K. (1993) Methane fermentation of energy crops: maximum conversion kinetics and in situ biogas purification. *Biomass and Bioenergy* 5, 261-278.
- 5 Jarvis Å., Nordberg Å., Jarlsvik T., Mathiesen B., and Svensson B. H. (1997) Improvement of a grass-clover silage-fed biogas process by the addition of cobalt. *Biomass and Bioenergy* 12, 453-460.
- 10 Kuch P. J., Crosswhite W. M. (1998) The agricultural regulatory framework and biomass production. *Biomass and Bioenergy* 14, 333-339.
- Parsby M. Halm og energiafgrøder – analyser af økonomi, energi og miljø. Rapport Nr. 87, Statens Jordbrugs og Fiskeriøkonomiske Institut.
- 15 Sims R. H. E. (2001) Bioenergy – a renewable carbon sink. *Renewable Energy* 22, 31-37.
- 20 Wyman C. E. and Goodman B. J. (1993) Biotechnology for production of fuels chemicals and materials from biomass. *Applied Biochemistry and Biotechnology* 39, 41-59.
- 25 Banks C. J. and Humphreys P. N. (1998) The anaerobic treatment of a ligno-cellulosic substrate offering little natural pH buffering capacity. *Water Science and Technology* 38, 29-35.
- Colleran E., Wilkie A., Barry M., Faherty G., O'Kelly N. and Reynolds P. J. (1983) One and two stage anaerobic filter digestion of agricultural wastes. *Third Int. Symp. on Anaerobic Digestion*, pp. 285-312, Boston MA (1983).
- 30 Dugba P. N., and Zhang R. (1999) Treatment of dairy wastewater with two-stage anaerobic sequencing batch reactor systems – thermophile versus mesophile operations. *Bioresource Technology* 68, 225-233.
- 35 Ghosh S., Ombregt J. P., and Pipyn P. (1985) Methane production from industrial wastes by two-phase digestion. *Water Research* 19, 1083-1088.

Han Y., Sung S., and Dague R. R. (1997) Temperature-phased anaerobic digestion of wastewater sludge's. *Water Science and Technology* 36, 367-374.

- 5 Krylova N. I., Khabiboulline R. E., Naumova R. P. Nagel M. A. (1997) The influence of ammonium and methods for removal during the anaerobic treatment of poultry manure. *Journal of Chemical Technology and Biotechnology* 70, 99-105.

- 10 Hansen K. H., Angelidaki I., Ahring B. K. (1998) Anaerobic digestion of swine manure: inhibition by ammonia. *Water Research* 32, 5-12.

Kayhanian M. (1994) Performance of high-solids anaerobic digestion process under various ammonia concentrations. *Journal of Chemical Technology and Biotechnology* 59, 349-352.

15

Wang Q., Noguchi C. K., Kuninobu M., Hara Y., Kakimoto K., Ogawa H. I., and Kato Y. (1997) Influence of hydraulic retention time on anaerobic digestion of pre-treated sludge. *Biotechnology Techniques* 11, 105-108.

- 20 *Disposal systems for animal cadavers etc.*

The present disposal system for animal cadavers is organised by registering plants which are licensed to process the animal cadavers. The cadavers are primarily used for production of meat and bone meal which traditionally have been used for animal foodstuff.

25

The present BSE-crisis have stopped this practise by a regulatory order from the EU-commission, stating that meat and bone meal cannot be used as animal foodstuff.

30

The livestock sector and associated businesses in Europe thus face the challenge to find alternative use of meat and bone meal or alternative ways of disposing off the meal. However, this is a difficult task because of the constraints imposed by the risk of spreading BSE prions or other prions possibly present in the meal or other fractions of animal cadavers.

35

The use of meat and bone meal or animal cadavers in conventional biogas plants is certainly not advisable and only partly possible. The processing of animal cadavers in plants licensed to process such animals is useually performed at temperatures
5 around 130°C, with pressure around 2-3 bar with a retention time of 20 min. Such conditions are not to be found in conventional biogas plants.

The below mentioned patents and patent applications form part of the prior art.

10 DE3737747 describes a plant and a process to stripping of N. CaO is added to the manure by which the ammonia is stripped, said ammonia is absorbed in a water solution containing hydrochloric acid. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment
15 such as the alkaline hydrolysis, welfare in the animal houses, utilization of energi crops, absorbing of ammonia in a sulfur solution, the precipitation of P, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

DE4201166 describes a method of concurrent treatment of different organic waste
20 products, in which the waste products are separated into three fractions containing different amounts of solid components. Solid fractions are homogenised before fermentation and biogas production. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, utilization of energi
25 crops, absorbing of ammonia in a sulfur solution, the precipitation of P, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

DE4444032 describes a plant and a process in which slurry i the first reactor is
30 stirred, aerated and added lime to pH 9.5 to strip ammonia. In the second reactor a salt containing ferro and a polymer are added to neutralise the slurry and precipitate solids. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, utilization of energi crops, absorbing of ammonia
35 in a sulfur solution, the precipitation of P, prevention of struvite formation etc. and

the use of biogas through a local gas engine or through an established pipeline for natural gas.

5 DE196615063 describes a process in which ammonia is stripped from fermented manure. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, utilization of energi crops, the precipitation of P, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

10

EP0286115 describes a method to production of biogas in which manure is added fat acids or compositions containing fat acids. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, utilization of energi crops, the precipitation of P, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

15

EP0351922 describes a plant and a process in which the stripping of ammonia, carbon dioxide and phosphat occurs from liquid manure. The manure is transported from the farm by tank cars to the plant where the slurry is treated with hot air and by that partly stripped of ammonia and carbon dioxide. The remaining part of the slurry is heated and lime is added to pH 10-11, by which more ammonia is stripped and calcium phosphate is formed. The stripped ammonia is absorbed in an acidic solution by the formation of ammonium salt, which is dried and utilized as fertilizers. A decanter centrifuge is used to separate solid parts from the slurry. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, utilization of energi crops, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

20

25

30

ES2100123 describes a plant and a process in which liquid manure is cleaned. Organic components is degraded and precipitated solids is removed by decanter centrifugation. The liquid is added acid and is spread in the land or is further cleaned by aeration and by that stripping of ammonia. The cleaned liquid is diverted to a water

35

purifying plant. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia at an early step, utilization of energi crops, prevention of struvite formation etc. and the use of biogas
5 through a local gas engine or through an established pipeline for natural gas.

FR2576741 describes a process to the production of biogas by fermenting of liquid manure. The slurry is treated with lime and precipitated components is removed. A number of aspects of the invention are not described by this reference. This applies,
10 among other things, to the pre-treatment such as the alkaline hydrolysis, utilization of energi crops, the precipitation of P, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

GB 2013170 describes a plant and a method to production of biogas. In the first reactor the organic material is acidified and the solid fraction is removed. The liquid fraction is diverted to the second reactor in which an anaerobic degradation occurs with the production of methane gas. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment
15 such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia, utilization of energi crops, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.
20

DE19644613 describes a method to produce solid fertilisers from manure. The liquid manure is added substrate from the biogas production together with CaO or Ca(OH)₂. The stripped ammonia is collected. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, utilization of energi crops, the precipitation of P, prevention of struvite formation etc. and the use of biogas through a local gas
25 engine or through an established pipeline for natural gas.
30

DE19828889 describes co-fermentation of harvested crops and organic waste with the production of biogas. The material is homogenised and fermented. A number of aspects of the invention are not described by this reference. This applies, among
35 other things, to the pre-treatment such as the alkaline hydrolysis, utilization of energi

crops, the precipitation of P, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

5 US 4,041,182 describes a method to production of animal foodstuff from organic waste. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, utilization of energi crops, the precipitation of P, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

10 US 4,100,023 describes a plant and a process to the production of methane gas and fertilisers. In the first reactor an aerob degradation of the homogenised material is performed. In the second reactor which is heated, an anaerob degradation and the biogas production occurs. Fertilisers are produced as liquids. A number of aspects
15 of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia, utilization of energi crops, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

20 US 4,329,428 describes a plant for anaerobic decomposition, in particular material from various green plants, and the use of the produced biogas. The plant is based on the decomposition and caused by mesofilic or thermopile anaerobic bacteria. A number of aspects of the invention are not described by this reference. This applies,
25 among other things, to the pre-treatment such as the alkaline hydrolysis, the stripping of ammonia, the precipitation of P, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

30 US 4,579,654 describes a plant and a process to produce biogas from organic materials. Solid materials are hydrolysed, acidified and fermented. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia, utilization of energi crops, prevention of struvite for-

mation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

5 US 4,668,250 describes a process in which ammonia is removed from the liquid fraction by aeration. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, utilization of energi crops, the precipitation of P, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

10

US 4,750,454 describes a plant for anaerobic digestion of animal manure and the use of the biogas produced by the process. The plant is based on decomposition caused by mesophilic or thermophilic anaerobic bacteria and utilizes a local gas powered engine equipped with a generator. A number of aspects of the invention are
15 not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, the stripping of ammonia, the precipitation of P, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

20

US 5,071,559 describes a method to treatment of manure. The manure is added water and the mixture is acidified. Liquid is removed by steamproduction, which again is condensated in another reactor and treated anaerobic to produce biogas. The fermented liquid is fraction is then treated by an aerob process. A number of
25 aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia, utilization of energi crops, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

30

US 5,296,147 describes a process to treat manure and other organic components. The organic waste fermentes and is then nitrified and further denitrified. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia, utilization of energi crops, prevention of struvite

formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

5 US 5,389,258 describes a method to production of biogas from semi-solid and solid organic waste. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia, utilization of energi crops, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

10 US 5,494,587 describes a process with a catalytic treatment of manure including reduction of the nitrogen concentration. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia, utilization of energi crops, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

15 US 5,525,229 describes a general procedure for anaerobic digestion of organic substrates under thermophile as well as mesofilic conditions.

20 US 5,593,590 describes separation and treatment of liquid and solid organic waste following a separation of the two fractions. The liquid fraction is fermented with the production of biogas followed by removing of precipitated solid components, which partly is recirculated in the process. The solid fraction is treated in an aerob process and is produced into compost, fertilisers or animal foodstuff. Part of the produced biogas comprising methane and CO₂ is reuse to the reduction of the pH level in the liquid fraction by a CO₂ absorbtion. Solids is precipitated from liquid fractions e.g. by a decanter centrifuge, and ammonia is stripped from the liquid by a pH of 9-10. Reject water can be used to clean stables. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses by use of straw, stripping of ammonia before biogas production, utilization of energi crops, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

5 US 5,616,163 describes a method to treatment of manure by which nitrogen is utilised in the production of fertilisers. Liquid manure is added CO₂ and/or CaSO₄ by which ammonia is stripped. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses by use of straw, stripping of ammonia before biogas production, utilization of energi crops, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

10 US 5,656,059 describes a method to treat manure by which nitrogen is utilised in the production of fertilisers more or less by nitrification. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses by use of straw, stripping of ammonia before biogas production, utilization of energi crops,
15 prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

US 5,670,047 describes a general procedure for anaerobic decomposition of organic substrates to gases.

20 US 5,681,481 US 5,783,073 and US 5,851,404 describes a process and an apparatus to stabilising of slurry. Lime is added to pH ≥ 12 and the mass is heated to at least 50.degree.C for 12 hours. Ammonia is stripped, and is either discharged into the atmosphere or recirculated in the system. A 'preheat chamber' can be used as
25 well as decanter centrifugation as well as mixing of the sludge to keep it in a liquid condition. The sludge is spread to land. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses by use of straw, stripping of ammonia before biogas production, utilization of energi crops, prevention of struvite formation etc. and the use of biogas through a local gas engine or through
30 an established pipeline for natural gas.

US 5,746,919 describes a process in which organic waste is treated in a thermofil anaerob reactor followed by treatment in a mesofil anaerob reactor. In both reactors
35 a production of methane gas occurs. A number of aspects of the invention are not

described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses by use of straw, stripping of ammonia before biogas production, utilization of energi crops, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

US 5,773,526 describes a process in which liquid and solid organic waste is fermented first by a mesofil process and thereby by a thermofil process. Solid components is hydrolysed and acidifies. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses by use of straw, stripping of ammonia before biogas production, utilization of energi crops, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

US 5,782,950 describes fermentation of biological waste by a homogenisation, aeration and heating of the mass. The waste is fractionated into a liquid and a solid fraction. The solids is produced into compost. The liquids is fermented by anaerob mesofil and thermofil process with production of biogas. Reject water is recirculated from the biogas reactor to the homogenisation process. Reject water from the biogas reactor is treated in a plant clarification installation. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia before biogas production, utilization of energi crops, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

US 5,853,450 describes a method to procude pasteurised compost from organic waste and green plant materials. The pH of the organic is increased to 12 and heated to above 55.degree.C. When the green plant material is added pH is lowered to 7-9.5. The mixture is fermented. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia before biogas production, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

5 US 5,863,434 describes a method to stabilise organic waste by degradation in a psychrofil anaerob process. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia before biogas production, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

10 US 6,071,418 describes a method and a system to treat manure with ozon in a way that induces an aerob and an anaerob zone within the material. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia before biogas production, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

20 US 6,171,499 describes an improved method to fermentate domestic and industrial waste. The waste is anaerob digested with production of biogas, which is utilized in a gas turbine in combination with natural gas. The fermented material is dehydrated and the sludge is diverted to a incineration plant. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia before biogas production, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

30 WO8400038 describes the production of biogas and degassed and stabilised fertilisers. The thermofil degradation occurs in an inner reactor and the mesofil degradation in an outer reactor. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia before biogas production, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

5 WO8900548 describes the utilization of Ca-ions and Mg-ions in the biogas production. The metal ions inhibit foam production. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia before biogas production, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

10 WO9102582 describes a plant and a method to produce gas and avoid spreading of harmful compounds to the surroundings by washing the gas. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia before biogas production, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

15 WO9942423 describes a method and a plant to the production of biogas. Fibres and particles from manure is composted and the liquid fraction is fermented anaerobically, stripped for nitrogen. The salts of P and K is utilised for fertilisers by reverse osmosis. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia before biogas production, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

25 www.igb.fhg.de/Uwbio/en/Manure.en.html describes a process to produce biogas from manure. From degassed manure the solid fraction is used to produce compost. From the liquid fraction is nitrogen collected and is used as fertilisers. A decanter centrifuge can be used to separate solid components from the mixture. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia before biogas production, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

http://riera.ceeeta.pt/images/ukbio_mass.htm describes a production of biogas by anaerob degradation. A decanter centrifuge can be used in the system. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia before biogas production, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

www.biogas.ch/f+e/memen.htm describes possibilities to reduce a mixture from solid components. Rotating disc reactor, fixed film reactor, ultrafiltration and reverse osmose is mentioned. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia before biogas production, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

www.biogas.ch/f+e/grasbasi.htm describes anaerob degradation of silage energy crops and manure with the production of biogas. Two processes is described: 1. Silage energy crops is cut into 1-3 cm and directed to a liquid fraction containing the manure. The mixture is fermented at 35°C. 2. A dry fermentation of manure and silage energy crops without adding further liquid. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia before biogas production, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

www.biogas.ch/f+e/2stede.htm describes the production of biogas. The organic waste is hydrolysed and acidified in a rotating sieve-drum from which the liquid fraction continuous is directed to anaerob degradation of with the production of biogas. A number of aspects of the invention are not described by this reference. This applies, among other things, to the pre-treatment such as the alkaline hydrolysis, welfare in the animal houses, stripping of ammonia before biogas production, prevention of struvite formation etc. and the use of biogas through a local gas engine or through an established pipeline for natural gas.

Summary of the Invention

5 The present invention shall demonstrate a new way of utilizing energy crops, namely through anaerobic co-digestion in farm scale biogas plants with animal manures. The process also includes slurry separation, i.e., refinement of nutrients in the animal manures.

10 The invention can also be used to co-digest animal cadavers, meat and bone meal etc. with animal manures/energy crops and thus to provide a way of disposing off animal cadavers etc. while at the same time facilitate the production of fertilizers produced from the input of the animal wastes along with the crops, manures etc.

15 The process design makes it possible to use annual fodder crops such as beets, maize or clover grass, all crops with a higher dry matter yield per hectare than grain cereals. The fodder crops are also beneficial as "green crops" and in crop rotations. The energy potential when using the set aside land for energy crop production shall thus be demonstrated by the present concept.

20 The central and obvious vision - under a wide variety of circumstances - is that the biogas production based on this concept shall in the future be competitive compared to the use of natural gas and thus be commercial attractive and preferably not subsidised. It is also the vision that the energy production shall constitute a substantial part of the Danish energy consumption, i.e. of the same order of magnitude of the
25 use of natural gas (about 150 PJ annually). In addition to this effect are the benefits in terms of environment, animal welfare and food safety.

30 Parsby has estimated an energy potential when using energy crops, in particular grain cereals, to 50-80 PJ annually. In the short run this requires an area of 150.000 ha and in the longer run an area of 300.000 ha. However, based on an dry matter yield of 15 tons per ha in beets including tops to be digested in biogas plants the energy potential becomes about 100 PJ annually. The energy from the co-digested manures shall be added to this (about 25 PJ). With the new cultivars of beets the yields of dry matter may substantially exceed the present levels, i.e., yields of the
35 order of 25 tons per hectare.

The core of the invention is a combination of processes which allows increased bio-gas production, stripping of ammonia and a subsequent optional further use and processing of the digested and stripped remains (the reject water).

5

It is characteristic that the core of the invention allows further simple and robust processes to be integrated with the core of the invention. A simple and robust energy plant with outstanding energy and economic performances as compared to conventional plants is achieved. The energy plant is further integrated with the management of the animal holdings and the agricultural land. Hence a number of aspects constitute the invention.

10

In a first preferred aspect the invention may be applied to combat infections and spread of animal microbial and parasitic pathogens such as Campylobacter, Salmonella, Yersinia, Acaris and similar microbial and parasitic organisms to air and agricultural land. The threat to humans of being infected is thus reduced if not eliminated.

15

In a second preferred aspect the invention may be applied to reduce BSE prions contained in manures, fodder, slaughterhouse waste, flesh and bone meal etc. This is achieved by a combination of pre-treatment and digestion. As part of this aspect, the present invention provides one possibility for handling animal cadavers, slaughterhouse waste etc. which enables the exploitation of the nutrients contained in the animal cadavers as fertilizers. The reduction and/or elimination of BSE prions contained in animal cadavers, meat and bone meal etc. but also manures, fodder, slaughterhouse waste, etc. during the process of the invention is a prerequisite for this way of handling the waste. This is achieved according to the invention by a combination of pre-treatment and digestion. This procedure is an alternative to the present procedure (however now presently prohibited by the EU commission) of processing animal carcasses in central plants and producing various products such as meat and bone meal to be used mainly as animal feed.

20

25

30

In a third preferred aspect the invention may be applied to separate the main nutrients nitrogen (N) and phosphorus (P) from animal manures and refine the nutrients to fertilizer products of commercial quality.

35

In a fourth preferred aspect the invention may be applied to produce large amounts of biogas from a wide range of organic substrates including all types of animal manures, energy crops, crops residues and other organic wastes.

In a fifth preferred aspect the invention may be applied to ensure optimal animal welfare and health when stabled in the animal houses while at the same time reducing emissions of dust and gasses such as ammonia. This is achieved by flushing or re-circulating reject water through the animal houses.

In a sixth preferred aspect the invention may be applied to benefit from the full range of advantages associated with the various aspects of the invention.

In further preferred aspects any combination of the core invention with any one or more of the other aspects mentioned may be preferred.

Brief Description of the Figures

Fig. 1 discloses one preferred embodiment of the present invention. In this embodiment, manure, preferably in the form of a slurry, generated in a house or stable (1) for the rearing of animals, including domestic animals, such as pigs, cattle, horses, goats, sheep; and/or poultry, including chickens, turkeys, ducks, geese, and the like, is transferred to either one or both of a first pretreatment tank (2) and/or a second pretreatment tank (3).

The working principles are that the manure, preferably in the form of a slurry including, in one embodiment, water such as reject water used for cleaning the house or stable, is diverted to the first pretreatment tank comprising a stripper tank, where ammonia is stripped by means of addition to the stripper tank of e.g. CaO and/or Ca(OH)_2 . However, addition of CaO and/or Ca(OH)_2 to the slurry may also take place prior to the entry of the slurry into the first treatment tank or stripper tank.

At the same time as the addition of CaO and/or Ca(OH)_2 , or at a later stage, the pretreatment tank comprising the stripper tank is subjected to stripping and/or heating, and the stripped N or ammonia is preferably absorbed prior to being stored in a

separate tank (11). The stripped N including ammonia is preferably absorbed to a column in the stripper tank comprised in the first treatment tank before being directed to the separate tank for storage.

- 5 Organic materials difficult to digest by microbial organisms during anaerobic fermentation are preferably pretreated in a second pretreatment tank (3) prior to being directed to the first pretreatment tank (2) comprising the stripper tank as described herein above. Such organic materials typically comprise a significant amounts of e.g. cellulose and/or hemicellulose and/or lignin, e.g. preferably more than 50%
10 (w/w) cellulose and/or hemicellulose and/or lignin per dry weight organic material, such as straws, crops, including corn, crop wastes, and other solid, organic materials. N including ammonia is subsequently stripped from the pretreated organic material.
- 15 In both the first and the second pretreatment tank, the slurry is subjected to a thermal and alkali hydrolysis. However, the temperature and/or the pressure is significantly higher in the second pretreatment tank, which is therefore preferably designed as a closed system capable of sustaining high pressures.
- 20 Finally, the slurry having been subjected to a pre-treatment as described herein above is preferably diverted to at least one thermophile reactor (6) and/or at least one mesophile biogas reactor (6). The slurry is subsequently digested anaerobically in the reactors concomitantly with the production of biogas, i.e. gas consisting of mainly methane optionally comprising a smaller fraction of carbon dioxide. The biogas reactor(s) preferably forms part of an energy plant for improved production of
25 energy from the organic material substrate.

The biogas can be diverted to a gas engine, and the energy generated from this engine can be used to heat the stripper tank. However, the biogas can also be diverted into a commercial biogas pipeline system supplying household and industrial
30 customers.

The remains from the anaerobic fermentation, still in the form of a slurry comprising solids and liquids, is preferably diverted, in a preferred embodiment, to at least decanter centrifuge (7) for separating solids and fluids. One result of this separation is
35

an at least semi-solid fraction comprising almost exclusively P (phosphor), such as an at least semi-solid fraction preferably comprising more than 50% (w/w) P (12). In the same step (7), or in another decanter centrifuge separation step (8), an at least semi-solid fraction preferably comprising almost exclusively K (potassium), such an
5 at least semi-solid fraction preferably comprising more than 50% (w/w) K (13) is preferably also obtained. These fractions, preferably in the form of granulates obtained after a drying step, including a spray drying step or a slurry drying step, preferably comprise P and/or K in commercially acceptable purities readily usable for commercial fertilisers (10). Such fertilisers may be spread onto crops or agricultural
10 fields. The liquids (9) also resulting from the decanter centrifuge separation step, such as reject water, can also be diverted to agricultural fields, they can be diverted back to the stable or animal house, or into a sewage treatment system.

In a further embodiment, the first pretreatment tank may be supplied with organic
15 material originating from silage tanks (4) comprising fermentable organic materials. The diversion of such organic materials to the first pretreatment tank may comprise a step involving an anaerobic fermentation such as e.g. thermophilic fermentation tank capable of removing gasses from the silage. Additionally, straws and e.g. crop
wastes originating from agricultural fields (5) may also be diverted to stables or ani-
20 mal houses and later to the first and/or second pretreatment tank.

Fig. 2 illustrates an embodiment essentially as described in Fig. 1, but with the difference that only phosphor (P) is collected following decanter centrifuge separation, and water in the form of reject water is collected in a separate tank for further purification, including further removal of N, removal of odours, and the majority of the
25 remaining solids. This may be done e.g. by aerobic fermentation. Potassium (K) may also be separated from the liquids at this stage.

Fig. 3 illustrates an embodiment comprising a simplified approach to the combined
30 biogas and slurry separation system according to the present invention. In this embodiment, no biogas fermentors are used, and the solids resulting from pretreatment in pretreatment tanks one (2) and/or two (3) are subjected to decanter centrifuge separation (4 and 5) following stripping of N including ammonia and collection thereof in a separate tank (8). Separate and at least semi-solid fractions comprising
35 P and K are obtained (9 and 10).

Fig. 4 illustrates an embodiment wherein the potassium (K) is not separated following decanter centrifuge separation as described for the embodiment illustrated in Fig. 3. Further separation of K from the reject water subsequently collected is however possible.

Figures 5 and 6 illustrate a preferred embodiment of the system according to the invention. The individual components are described herein in detail.

Further preferred embodiments of the present invention are described in further detail herein below.

Detailed Description of the Invention

The present invention pertains to a number of individual aspects as described herein further below.

The first aspect (sanitation)

The first aspect includes a system consisting of a first device, a house or stable for the rearing of animals including domestic animals such as pigs and cattle, and/or a second device mainly for stripping of ammonia and pre-treatment of the substrate and/or a third device mainly an energy plant for improved production of energy from the substrate.

The system can preferably consist of an animal house and a stripper tank and a biogas reactor. Additional components can include a device for addition of CaO or Ca(OH)_2 to the slurry, an absorption column operated on the basis of e.g. sulphuric acid, a storage tank for the ammonia concentrate, and a storage tank for digested slurry.

The produced biogas can desirably be used for production of current and heat in a gas motor and generator, the current preferably being sold to a net and the heat preferably used for heating of e.g. slurry and/or animal houses. The energy plant according to the invention has an outstanding performance in terms of the energy

production per unit substrate treated in the plant. The outstanding performance is achieved by a combination of pre-treatment of the substrate to be digested, whether animal manures or other organic substrates, with stripping of ammonia from the substrate before anaerobic digestion.

5

The advantages associated with the present invention are described in more detail herein below. One central aspect of the sanitation aspect of the invention is a pre-treatment comprising - alone or in combination - a number of individual pre-treatment steps described in detail in the following:

10

Pre-treatment of slurry following removal from the animal houses can include any one or more of the following steps: 1) ammonia stripping, 2) hydrolyses of organic matter, 3) sanitation of the slurry, 4) reduction of foam formation, 5) flocculation, 6) precipitation of P, and 7) prevention of struvite formation.

15

The working principles are that slurry is diverted from the first device to a stripper tank where ammonia is stripped by means of addition of CaO or Ca(OH)_2 , stripping and heat and absorbed in a column before stored in a tank. At the same time the slurry is subject to a thermal and alkali hydrolysis, preferably by using a lime cooker. Finally the pre-treated slurry is diverted to the third device, consisting of one or two thermopile/mesopile biogas reactors, where the slurry is digested anaerobically under the production of biogas, i.e. gas consisting of mainly methane with a smaller fraction of carbon dioxide. The biogas is diverted to a gas engine and the heat from this engine is used to heat the stripper tank. The current produced is sold to the net.

20

25

As straw and possibly also sawdust is a significant fraction of deep litter from cattle and poultry holdings, there is a need for a specific pre-treatment of these manures before optimal use as substrate for methane production in biogas plants. Lime pressure cooking represents one preferred pre-treatment method in this respect. Deep litter treated by this technology can thus be made available for methane production in a more efficient way and result in an increased biogas production. Additionally, it is assured that uric acid and urea dissociates to ammonia and that proteins and other substances are dissolved. It is hereby ensured that the inorganic nitrogen from

30

the deep litter can be collected in the N-concentrate by the ammonia stripping process.

5 The availability of the N in the deep litter and poultry manure to agricultural crops is therefore substantially increased. It is estimated that the potential utilization efficiency can be increased to about 90% as is the case for the other manures treated in the biogas and slurry separation plant according to the present invention.

10 Alternatively, it may be appropriate to digest the poultry manure in the first thermophilic or mesophilic reactor before passing it to the stripper tank. This depends on the quality of the manure and to which degree the uric acid dissociates due to the two different treatments. Experience gained after some working time of the plant shall clarify this. It is important to stress the versatility of the plant which allows all types of manure and energy crops to be treated.

15 The technical construction is relatively simple because a screw conveyor equipped with a macerator, all made of rust- and acid proof steel, conveys the biomass into a lime cooker where the mass is heated by a steam injection to 180-200° C. The pressure becomes 10-16 bar during the 5-10 minutes necessary for the mass to be
20 treated.

The unit to be constructed shall be able to produce temperatures and pressures in the temperature interval of 100-200° C. Hereby it is possible to adjust the treatment to different biomasses to be digested in the plant according to the invention under
25 due consideration to use of energy, tar formation and technical parameters.

Foam formation represents a common problem in biogas plants. One preferred choice for controlling foam formation in biogas plants, in particular when supplied with large amounts of biomass from e.g. energy crops, is rape oil, which in addition
30 to the effect of foam control also is a substrate for methane gas formation. Ca-ions are also very efficient in controlling foam as are many salts. One preferred foam controlling measure of the present invention is $\text{Ca}(\text{OH})_2$ and/or CaO in addition to its other effects mentioned earlier. Supplementing the slurry with Ca-ions is also believed to stimulate the formation of flocs and the bacterial adhesion to organic particles and thus the performance of the anaerobic digestion.
35

Accordingly, if additional foam control and/or flocculation is needed in the process because of a very high gas production the fermenters may be supplied directly with Ca and/or rape oil. The addition of $\text{Ca}(\text{OH})_2$ or CaO will also lead to precipitation of bicarbonates as CaCO_3 . This reduces the CO_2 concentration in solution and in the gas phase and contribute to the reduction of foam formation through reduced carbon dioxide emissions.

Addition of $\text{Ca}(\text{OH})_2$ or CaO in connection with stripping of ammonia and sanitation of the slurry will also lead to precipitation of orthophosphate, i.e. dissolved P (PO_4^{3-}). These P-particles may be suspended in the slurry as well as other flocks. The use of Ca will also lead to a limited reduction of chemical oxygen demand (COD), which means that Ca precipitates other salts than just the orthophosphate.

It is believed that - irrespective of the chemical differences between various organic waste products, a simple heat treatment and in particular heat treatment in combination with alkali hydrolysis will lead to an increased gas yield. Furthermore, a combination of high temperatures and high pH during pre-treatment is believed to result in a more effective sanitation of the organic material as compared to anaerobic digestion alone, whether thermophile or mesophile.

It should be noted that in the Statutory Order no. 823 from the Danish Ministry of Environment and Energy, it is laid down that a controlled sanitation consists of 1 hour residence time at 70°C . In view thereof, a treatment according to preferred embodiments of the invention consisting of one week residence time at 70°C before two subsequent anaerobic digestions (thermo- or mesophilic) is believed to completely eliminate all known veterinary and/or human microbial and zoonotic pathogens. Preferably, BSE prions are also eliminated or at least significantly reduced in number.

The overall result is that all infectious organisms in the slurry are eliminated and therefore not spread to the environment when the manure is applied to land. This also makes it possible to flush the first device (the animal houses) with the digested slurry in order to maintain the sties etc. clean. Cross infections among animals are thus prevented. It also allows further use of water to rinse animals and sties, air ex-

hausts etc. with the effects of preventing emissions to air of odour, dust and infectious agents. This is possible because the slurry with additional water shall not be stored till periods where land speeding is permitted. The slurry without N may be spread to land throughout the year.

5

However, in the first aspect it is the pre-treatment and thus the sterilization of the slurry which is preferred in order to allow subsequent spreading onto agricultural fields.

10

It will be clear that the present invention relates to a variety of different aspects, which constitute, individually or in combination, patentable inventions in their own right. The below section contains a description of various individual parts (components) of one aspect of the present invention. An overview of the components are given in figures 5 and 6.

15

It will be understood that selected components can form the basis for other aspects of the present invention. The invention shall in no way be limited to the combination of the entire list of components described herein below. It will be clear from the description when other aspects of the invention are related to only some of the components described herein below. Non-limiting examples of such aspects includes devices for concentration of N (nitrogen) and/or P (phosphor) and/or K (potassium); energy generation based on the components of stripper tank, lime cooker and fermentor; and animal welfare/reject water processing.

20

25

It will also be understood that the below aspects related – among other things – to the aspect of sanitation, does not necessarily have to comprise all of the components illustrated below. Aspects related to sanitation are also understood to comprise a combination of only some of the components described herein below.

30

Animal houses

The animal houses (Component number 1) serves to provide an optimal food safety and food quality, an optimal animal welfare and working conditions for the labour personal in the housings, an optimal slurry management, suitable for treatment in the GreenFarmEnergy plant, and a reduction of emissions to the external environ-

35

ment to a minimum (ammonia, dust, odour, methane, dinitrogen oxide and other gasses).

5 The housing system can consist of one or more early weaning houses with a total of 10 sections designed to produce 250 livestock units annually. Each section houses e.g. 640 piglets (7-30 kg) or 320 slaughter pigs (30-98 kg).

10 An amount of about 10.000 m³ slurry can be expected to be produced annually. In addition to this volume an amount of 5-10.000 m³ process water shall be recycled through the houses. The following main conditions shall preferably be met by the housing system:

15 1) Two-climate system: The sties shall preferably be designed as two-climate systems. The back end of the sties shall be equipped with an adjustable coverage providing an opportunity for the pigs to choose between a relatively warm environment under the covering and a relatively cold environment in the rest of the sty. The temperature difference shall be in the range of 5-10 deg. C.

20 When the piglets have grown to around 30 kg the coverage shall be used to allow for generally colder temperatures in the animal house as such. The pigs may keep warm under the coverage. By allowing for colder temperatures it is possible to increase ventilation also during colder ambient periods.

25 2) Occupation: The pigs are preferably offered straw from an automate. The searching and digging behaviour is hereby stimulated, because they shall pick out the straw from the automate by themselves. The straw serves also as an energy source in the energy plant.

30 3) Heating: Heat from the energy plant is preferably recycled to the animal houses. The heat can be provided by two separate circulation systems. One is located under the covering to 30-35°C, which provides the pigs with a comfortable micro-climate, keeps the floor dry and reduces bacterial growth on the floor. The second provides heat to the overall airspace in the house via pipes along the walls of the house. The second circulation is coupled to the ventilation control.

4) Showers: Showers are preferably established over the slats, which covers $\frac{1}{4}$ of the total floor area. This motivates the pigs to manure on the slats, as opposed to the solid floor. The shower water will flush the manure into the canals preventing malodour, ammonia losses etc. The clean solid floors substantially reduces the possible infections from pathogens in the manure as *Salmonella*, *Legionella* etc.

5) Flushing: The manure canals are preferably flushed several times a day. It is provided by flushing of canals with process water from the energy plant. The manure is diverted to a central canal through a valve.

6) Canal design: The surface of the manure is reduced by use of V-shaped canals and an optimal flushing of the canals are achieved at the same time. This is central for the reduction of emissions from the animal houses.

7) Ventilation: The ventilation is designed so that 20% of the maximum ventilation is diverted down under and through the slats, into central ventilation shaft, between the double V-canals. In 60-80% of the year 20% of the maximum ventilation is sufficient to provide ample ventilation.

8) Feeding: Foodstuff is provided by a wet feeding equipment which provides fodder ad libitum.

Slurry Collection Tank

The function of a slurry collection tank (Component number 2) is to collect slurry from the daily flushings of the animal houses and to work as a buffer before pumping to the main reception tank. The slurry is diverted to the collection tank by means of gravitation. The volume can be anything appropriate, such as e.g. 50 m³. The tank can be made of concrete and it can be placed below the floor in the animal houses so that the slurry from the houses can be diverted to the collection tank by means of gravitation.

Main Reception Tank

Slurry from the collection tank is preferably pumped to the main reception tank (Component number 3). Other types of liquid manure/waste may also be added to the reception tank from other farms/plants. Options are mink slurry, cattle slurry, molasses, vinasses, silage etc. This is transported to the reception tank by lorry and is loaded directly into the reception tank. The volume / capacity is anything appropriate, such as e.g. about 1.000 m³. The level in the stripper tank preferably controls a pump, which pumps slurry from the reception tank. The dose adjustment can be manual or automatic. The maximum capacity can be anything appropriate under the circumstances.

CaO Addition

When slurry is being pumped from the reception tank 1 to the stripper tank, lime is added to the slurry in order to increase the pH. The lime addition manifold is preferably adjusted to add 30-60 g CaO / kg TS. The lime is preferably supplied as a powder which can be blown into the silo from the lorry. The volume / capacity of the silo can be e.g. about 50-75 m³. The dose of 30-60g / kg TS corresponds to app. 6-12 kg CaO per hour with a slurry capacity of 3,5 m³ / h with 6% TS.

When added directly to the slurry (6% TS), the lime dose is about 60 g / kg TS yield (about 8,8 kg CaO per hour). It is however preferred to add the lime directly to the alkali pressure sterilization and hydrolysis unit. When lime is added directly to the pressure unit (the E-media hold 20-70 % TS), the lime dose is about 30-60 g / kg TS. 60 g / kg d.m. equals about 342 kg CaO per batch, while 30 g / kg d.m. equals about 171 kg CaO per batch.

Balance Installation

The balance (Component number 5) shall preferably weigh the incoming E-media (energy containing organic material). The suppliers will preferably specify the type of media which is supplied to the plant, i.e. deep litter, energy crops etc. of various sorts.

The specification shall be made by selecting the relevant E-media on a control panel. According to the suppliers panel registration, the weight of received E-media incl. specification of media is recorded.

- 5 The control thus specifies for each E-media (see alkali hydrolysis):
- Energy potential
 - The required heating time
 - The required retention time

10

Reception station for deep litter and energy crops

- 15 The reception station (Component number 6) shall receive deep litter from e.g. poultry or other animals as well as energy crops. The station is preferably a large silo equipped with several screw conveyors in the floor. The lorries will empty their load of E-media directly into the silo. The volume / capacity can be anything appropriate under the circumstances, such as e.g. a yearly capacity of E-media (about
- 20 51.5% TS) of about 9.800 tonnes. The volume of the silo can be from several cubic meters to about 100 m³, corresponding to three days capacity (65 h). The materials are preferably concrete / steel.

Silo for energy crops

25

The silo for energy crops (Component number 7) serves to provide storage means for energy crops. The crops are preferably conserved as silage. The volume / capacity can be e.g. from about 5.000 – 10.000 m³. The silo can be a closed compartment from which silage juice is collected and pumped to the reception tank.

30

Transport- and homogenisation system for deep litter and energy crops

- 35 The transport- and homogenisation system (Component number 8) for deep litter and energy crops preferably receives E-media from the screw conveyors in the floor of the reception station. The E-media can be transported by additional screw conveyors to the cooking units and at the same time preferably macerated by an inte-

grated macerator. The volume /capacity can be anything required under the circumstances including about 1,5 m³ E-media / hour, or 8.200 tonnes of E-media / year. The capacity of the transport- homogenisation system is preferably not less than about 30 m³ / hour. Three fundamental parameters shall control the addition of E-media, i.e. volume, weight per volume, and time. From these parameters volume per unit time, time and thus total volume and weight shall be established.

Alkali pressure sterilization and hydrolysis unit

10 The alkali pressure sterilization and hydrolysis unit (Component number 9) shall serve two main purposes, i.e. firstly elimination of microbial pathogens in the E-media in particular in deep litter from various poultry or other animal productions and secondly, at the same time hydrolyse structural components of the litter in order to render them available for microbial degradation in the fermentors.

15 The unit shall also preferably eliminate or at least substantially reduce BSE-prions if present in waste introduced into the plant. Such waste include flesh- and bone meal, animal fats or similar produce from the processing of animals not used for consumption.

20 Filling of the pressure sterilizer is provided by the transport- and homogenisation system, which transports E-media into the according to type of E-media as defined on the balance installation.

25 The pressure cooking unit consists of two identical units, i.e., two elongated pipe-like horizontal chambers with a central screw. The two pipes are fastned one on top of the other in order to provide for easy loading of the lower pipe. The units are covered by a hollow cape on the downwards side. The cape shall divert heat to the media from steam under the cape.

30 Lime is added to the upper cooking unit from the CaO silo, i.e., 342 kg per batch.

The lower pipe receives pre-heated E-media from the upper unit.

The lower unit is emptied into a small mixertank containing 25 m³. Here the E-media is mixed with slurry from the reception tank 1, the mixture is subsequently pumped into the strippertank.

- 5 The CaO tupe contains a by pass so that CaO can be added directly into mixing container under the two pipes. The mixing chamber is used for mixing sterilized E-media and raw slurry from the reception tank to provided a homogeneous biomass and to reuse the heat of the E-media.
- 10 The central process parameters are dry matter content of the E-media, temperature, pressure and pH. From a wide range of possible combinations the optimal parameter setting is a temperature of 160°C, pressure of 6 bar, dry matter content og app. 30%, and pH of app. 12.
- 15 The retention time in the sterilization unit consists of several phases: 1. Filling time; 2. Preheating time in the upper pipe; 3. Heating time in the lower pipe; 4. Retention time at the selected temperature and pressure; 5. Pressure release time; 6. Emptying time, and 7: CIP time
- 20 The filling phase consists of the time required to transport the E-media into the pressure sterilizer and mix it with the added slurry. The filling time shall be app. 10 min. After filling the E-media shall be heated to 160 C at 6 bar. Preheating takes place in the upper pipe and final heating in the lower pipe. Heating time is expected to be app. 30-40 min.
- 25 The retention time at the desired temperature and pressure shall be app. 40 min (at 160 C and 6 bar).
- 30 Pressure release time app. 10 min. The pressure is released into the stripper tank.
- Emptying is achieved by running of the screw conveyors.
- CIP time. Cleaning performed on occasion, generally not necessary.

The volume of the pressure cooker is 10 m³ per unit, and the degree of filling is app. 75-90%. The volume of the mixing container is 25 m³.

An example of running conditions are illustrated below.

5

	Range	Selected	Units
TS	10-30	30	% of total weight
Temperature	120-160	160	° C
Pressure	2-6	6	Bar
PH	10-12	12	pH

At the panel for suppliers where E-media are registered the following shall preferably be defined for the control of the sterilization unit: Weight, volume and sort of E-media. It is thus possible to define for each E-media transported to the pressure cooker the:

10

- Energy potential for each E-media
- Necessary heating time
- Necessary retention time
- Necessary mixing time with the slurry
- Necessary energy use depending on E-media
- Degree of filling, signal from radar / microwave gauge
- Empirical based values depending on visual monitoring by the operator

15

20 Mixing Tank for Pressure-sterilized E-media and Raw Slurry

Following sterilization and hydrolysis in the pressure unit, the treated biomass is allowed to expand into a mixing tank (Component number 10) preferably located below the pressure unit. Excess pressure (steam) is released into the strippertank in order to collect ammonia and transfer heat to the stripper tank biomass before expansion into the mixertank.

25

The purpose of the mixertank is to mix cold raw slurry from the reception tank with hot sterilized E-media in order to obtain heat transfer (re-use of heat) and mixing of the two media.

- 5 The volume / capacity is e.g. about 25 m³. Any suitable material can be used, including insulated glasfibre. The working temperature is typically about 70-95°C.

Tank for liquid biomass

- 10 The liquid biomass contained in the tank for liquid biomass (Component number 11) shall be use to ensure sufficient biogasproduction during the start up phase of the whole plant. However, it can also be used occasionally, when such liquid biomass is available. Liquid biomass include e.g. fish oil, and animal or vegetable fats. Vinas-
15 ses and molasses can also be used, but this is not preferred because of the relatively high water content and thus low potential energy content per kg product.

- The volume / capacity is typically about 50 m³, and a suitable material for the tank is stainless steel. The contents of the tank is preferably liquids and solids having a particle size of max. 5 mm. Stirring as well as a heating system for temperature
20 control is preferably provided, as are feeding pump(s) to the fermentor(s). The temperature shall preferably be min. 75°C so that oily or fatty biomass can be pumped into the fermentor(s).

Stripper and sanitation tank

- 25 The stripper and sanitation tank (Component number 12) preferably receives the following media:

- Slurry from reception tank 1 and/or
- 30 - E-media from the pressure cooker, and/or
- Possibly liquid biomass from biomass liquid tank, and/or
- Reject water from decanter or possibly after K-separation.

- The purpose of the tank is to regenerate heat used in the pressure cooker by heat-
35 ing the slurry from reception tank 1, to mix the E-media with slurry and hence to

produce a homogeneous feed to the fermentors, to control pH before feeding to fermentors, and to sanitise the slurry.

- 5 The stripper and sanitation tank strips ammonia, step I, and the gas is diverted to an absorption column which is common to the final stripper process, step II. Microbial pathogens are eliminated and the media / slurry is prepared for anaerobic digestion.

One presently preferred shape of the stripper and sanitation tank is :

10 Bottom/floor

- With insulated concrete cone, directed downwards angle 20 degrees
- Impaired stirring / sand is removed from the floor or according to the mammut pumping system
- 15 - A sand filter is placed in the bottom, which can be emptied throughout an external pipe connection. It will also be possible to empty the tank through the filter

Top/ceiling

- 20 - With cone construction of sandwich insulated Isophthalic Polyesters (Encapsulated Foam). Cone angle is approximately 10 degrees.
- Mounted water drizzle system to avoid the production of foam from the stirring process and the process in common.
- A slow running stirring system is placed on top of cone to ensure the optimal homogenisation, -optimal vaporation of the ammonia, and optimal distribution of
- 25 - The ammonia is transported through wet air in a pipe to the absorbing unit

Side/wall

30

- With cylinder construction of sandwich insulated Isophthalic Polyesters (Encapsulated Foam).
- Mounted approximately 600 meters of heating 5/4" pipes in a cylinder ring shape inside the tank to heat up the media
- 35 - Mounted some temperature transmitters to regulate the heating process

- Mounted a pH-measuring instrument to regulate the acid supply to the media
- Outside cylinder wall at the bottom is mounted a insulated valve/pumping room
- An ammonia steam diffuser is placed in the middle of the tank. The ammonia steam generated in the alkali sterilisation and hydrolysing unit is diffused into the media.

10

Volume / Capacity: The cylinder wall has an inside diameter of about 12 m and a height of 9 m. This means a tank handling volume of approximately 1.000 m³ the bottom cone included.

10

The hydraulic retention time for slurry and E-media is about 7 days, and the absolute minimum retention time is about 1 hour.

15

In one preferred embodiment, the bottom is basically made of concrete, arming iron and pressure proof insulation. The surface in contact with media is coated with Isofatalic Polyester to avoid corrosive damaging of the concrete and arming iron. All pipes mounted in the bottom is either polyester or stainless steel. The top and bottom is basically a construction of sandwich insulated Isofatalic Polyesters (Encapsulated Soap). All pipes mounted is either polyester or stainless steel.

20

Other components

25

- The stirring element is made of stainless steel
- The heating elements is made of coated mild steel and/or stainless steel
- All other components placed inside the tank is made of stainless steel

30

In one preferred embodiment, default parameter values for stripping of ammonia from slurry in this system are: Temperature of about 70° C; pH of about 10 - 12; liquid gas ratio of < 1:400, 1 week operation, and more than 90% affectivity is achieved.

An example of conceivable running conditions are listed below:

- Media: All sorts off liquid animal manure and pressure sterilized solid or liquid E-media, various liquid organic wastes, CaO.
- Running temperature: 70 – 80 °C
- 5 Running gas combination: 80% NH₄ , 15% CO₂ , 3% O₂ , 2% other gases
- Insulation k-value: 0,20 W/m²K
- Running Max. Pressure: +20 mbar abs. (No vacuum)
- Max. viscosity in media: 15% TS
- 10 Base/Acid-range: 5-10 pH
- Abrasive rudiments in Media (Ex. Sand): 1-2%
- Max. temperature in heating elements: 90 degrees celcius
- Max. effects in heating elements: 600 kW
- Transmission effect: 7,5 kW / 20-25 rpm.
- 15
- The stripper and sanitation tank supplies the fermentor(s) with treated material for fermentation. In a timed process the material will be transported to the fermentors. The demand of material depends on the digestion process in the fermentors. One, two, three or more fermentors can be employed.
- 20
- The stripper and sanitation tank is regularly filled with slurry and E-media from the alkali pressure process. Finally, to obtain a dry matter of ~15% (15%TS). Some level switches regulate the content in the tank. A TS-mesuring unit regulates the content of TS. Every 1 hour after filling of slurry and E-media it is possible to pump
- 25 E-media to the fermentor(s).
- The top of the stripper and sanitation tank is preferably ventilated through an ammonia-absorbing unit (Step I), and a pH-measuring unit regulates the need for CaO.
- 30 The temperature of the E-media is regulated through temperature transmitters.
- A timed process can optionally pump water / slurry into the drizzle system to prevent production of foam.

Fermentors for Biogas Production

5 Digestion of the biomass is provided by a multi-step fermentor system preferably comprising three fermentors (Components 13, 14 and 15). Systems with fewer as well as more fermentors can also be applied.

10 The fermentors are preferably connected to achieve maximum flexibility and optimum biogas production. The fermentors shall be planned for routinely running at thermophile (45-65°C) as well as mesophile (25-45°C) temperatures.

The digestion process can be optimised in terms of organic loading rate, retention time, and maximum digestion (min. 90% of VS). Heat spirals are included in order to heat the biomass to the preferred running temperature.

15 A top fastened slow running stirrings system ensures optimal homogenisation and distribution of heat in the biomass.

Regulation of pH is possible through addition of an organic acid (liquid) in necessary quantities.

20

The fermentors preferably receives the following media:

- E-media from the stripper and sanitation tank
- Liquid biomass from the liquid biomass tank
- 25 - Acids from the acid tank

The specific shape of the tank can in one preferred embodiment be:

Bottom/floor

30

- With insulated concrete cone, directed downwards angle 20 degrees
 - Impaired stirring / sand is removed from the floor or according to the mammoth pumping system
 - A sand filter is placed in the bottom, which can be emptied throughout an external pipe connection. It will also be possible to empty the tank through the filter
- 35

Top/ceiling

- With cone construction of mild steel. Cone angle is approximately 10 degrees
- 5 - Mounted water drizzle system to avoid the production of foam from the stirring process and the process in common
- A slow running stirring system is placed on top of cone to ensure the optimal homogenisation, and optimal distribution of heat in the media.
- The biogas is transported through wet air in a pipe to the gasbag.

10

Side/wall

- With cylinder construction of mild steel.
 - Mounted approximately 600 meters of heating 5/4" pipes in a cylinder ring shape
 - 15 - inside the tank to heat up the media
 - Mounted some temperature transmitters to regulate the heating process
 - Mounted a pH-measuring instrument to regulate the acid supply to the media
 - Outside cylinder wall at the bottom is mounted a insulated valve/pumping room
- 20 The volume / capacity of each tank can have any suitable net volume, including a net volume of about 1.700m³.

The materials for the fermentors can e.g. be as specified below:

25 Bottom

- The bottom is basically made of concrete, arming iron and pressure proof insulation
- The surface in contact with media is coated with Isofatalic Polyester to avoid
- 30 - corrosive damaging of the concrete and arming iron
- All pipes mounted in the bottom is either polyester or stainless steel

Top and wall

- 35 - The top and wall is basically a construction of mild steel

- All pipes mounted is either polyester, stainless steel or mild steel

Other components

- 5
- The stirring element is made of mild steel
 - The heating elements is made of mild steel
 - All other components placed inside the tank is made of stainless steel or mild steel

- 10 The running conditions can be any conditions suitable, including

	Media:	All sorts off animal manure, primarily pigs slurry. Macerated energy crops. Some sorts of organic waste, CaO, organic Acids
15	Running temperature:	35-56 °C
	Running gas combination:	65% CH ₄ , 33% CO ₂ , 2% other gases
	Insulation k-value:	0,25 W/m ² K heatloss is estimated to 10 kW
	Running Max. Pressure:	+20 mbar abs. (No vacuum)
	Max. viscosity in media:	12% TS
20	Base/Acid-range:	5-10 pH
	Abrasive rudiments in media (Ex. Sand):	1-2%
	Max. temperature in heating elements:	80 degrees celcius
	Max. effects in heating elements:	600 kW
	Transmission effect:	7,5 kW / 20-25 rpm

25

The digestion shall be run at about 55°C. Heat loss is estimated to about 10 kW.
The biomass in the tank is can be heated from 5°C to 55°C during 14 days, and the possibility of addition of acid for adjustment of pH.

30

Tank for organic acids for pH adjustments in fermentors

A tank for organic acids (Component number 16) for pH adjustments in the fermentor(s) is preferably also provided.

5

Buffer tank for degassed slurry before decanter

Following digestion of the biomass in the fermentors the degassed biomass is pumped to a small buffer tank (Component number 17) before being subjected to separation in the decanter.

10

Decanter installation

The function of the decanter installation (Component number 18) is to extract suspended solids (ss) and P from the biomass.

15

The decanter separates the digested biomasse into the two fractions i) solids, including P, and ii) reject water.

The solids fraction contains 25-35% d.m. App. 90% of the ss. and 65-80% of the P-content of the digested biomass is extracted. In case of addition of PAX (Kemira Danmark) to the buffer tank before separation in the decanter, app. 95-99% of the P can be extracted. The solids fraction is transported to containers by means of a shaft less screw conveyor.

20
25

The rejectwater contains 0-1% ss and dissolved K. The ss depends on the addition of PAX. The principal component of the reject waters is dissolved K which amounts to app. 90% of the original K-content in the biomass. The reject water is pumped to the reject water tank.

30

P-fraction transport System and Treatment

From the decanter installation the solid matter fraction (routinely called the P-fraction) can be transported to a series of containers by means of conveyor screws and belts forming a P-fraction transport system (Component number 19).

35

A common conveyor band transports P-fraction to a storage where it is stacked into piles, covered with a compost sheet and allowed to compost. The composting process further dries the P-fraction and the d.m.-content thus increases to 50-60%.

5

Second N-stripping step

Efficient stripping of ammonia from the reject water is preferred, and a residual level of about 10 mg $\text{NH}_4\text{-N}$ / ltr or less is preferred.

10

The second stripping step is preferably carried out by using a steam stripper operated at ambient pressure. The stripper principle benefits from the different boiling temperatures of ammonia and water. At temperatures close to 100°C extraction of ammonia is most efficient. The use of energy in order to heat the feed is an essential running parameter. The stripper unit shall therefore preheat the feed before entering the stripper column to close to 100°C. This is provided by use of steam (or possibly warm water and steam) from the motorgenerator unit in a steam-water heat exchanger.

15

20

When heated the feed enters the stripper column and percolates over the column while at the same time being heated to the running temperature by a counter current of free steam. The steam/ammonia gas is subsequently condensed in a two step condenser.

25

From the floor of the column the water now free of ammonia is pumped to a level controlled exit pump.

30

The stripped ammonia is diverted to the bottom of a two-step scrubber condenser where the ammonia gas is condensed primarily in a counter current of cooled ammonia condensate. The ammonia gas not condensed are subsequently condensed in a counter current of pure water (possibly permeate from the final reverse osmosis step). If the use of acid is wanted or necessary it is appropriate to use sulphuric acid at this stage. It is thus possible to achieve a higher final concentration of ammonia.

The scrubber condensator are preferably constructed from a polymer in order to allow the use of acids.

Ammonia absorption column (for use with first and/or second N-stripping)

5

A condensate scrubber is used in order to gain flexibility concerning addition of acid. The column (Component number 21) is preferably constructed in two sections so that the fraction of ammonia not condensed in the first section is subsequently condensed in the second section. This takes place in a full counter current so that addition of water is limited as much as possible. Thereby a maximum ammonia concentration in the final condensate is reached (larger than 25%). The ammonia product can be pumped out with a separate pump or be taken out from a valve on the circulation pump. The absorption may be assisted by addition of sulfuric acid into the water counter current.

10
15

Sulphuric acid tank

The sulphuric acid tank is used for storing the sulfuric acid used in the N-stripping process. (Component number 22).

20

NS tank

The NS tank (Component number 23) is used for storing the stripped N.

25

Gas store

It is preferred to establish a gas store (Component number 24) as a bufferstore for the feeding of e.g. a motorgenerator engine.

30

Rejectwater Tank

From the decanter installation the rejectwater is preferably pumped to the rejectwater tank (Component number 25).

35

The rejectwater tank is equipped with a submerged micro-filter with static operation. The micro-filter shall remove particles larger than 0,01- 0,1µm. A negative pressure of 0,2-0,6 bar shall be built up at the membrane. Hence the permeate is sucked through the membrane retaining the particles on the membrane surface. In order to prevent membrane fouling and scaling the coating of the membrane surfaces has to be removed by a periodic backwash procedure.

A micro-processor control device shall automatically control the extraction of permeate and the backwash procedure. The extraction shall be interrupted by periodic backwash e.g. for 35 seconds for every 300 seconds running time. The total flow shall be 2-6 m³ per h.

Aeration may be applied to assist the micro-filtration. Aeration impose shear stress on the membrane surface reducing scaling and fouling. It further aerates the rejectwater and stimulates aerobic decomposition of residual organic matter, nitrification and denitrification. Possible remaining odour, nitrate etc. is thus removed during the process of micro-filtration.

From this tank the permeate shall be used for:

- Rinsing of the animal houses, canals, slats etc.
- Further separation. Dissolved K shall be concentrated by means of reverse osmosis, the K-fraction being stored in a separate storage tank. Water for rinsing animals housss may also be taken from this permeate flow.
- The K may also be concentrated through other means such as mechanical or steam compression. This depends on the specific choice for each specific plant and amount of excess heat available for steam compression.

The reject water tank containing the concentrate from the micro-filtration shall be emptied at regular intervals to remove the particle concentrate. This shall be added to either the K-fraction or the P-fraction from the decanter.

K tank

5 The K tank (component number 26) serves the purpose of storing the potassium (K) concentrate.

Gas cleaning

10 The biogas produced in the fermentors may contain trace amounts of hydrogen sulfide (H_2S) which are necessary to remove (Component number 27) before burning the biogas in a combined heat and power plant.

15 The gas shall be cleaned by employing the ability of certain aerobic bacteria to oxidise H_2S into sulfate. The genus shall primarily be the genus Thiobacillus which is known from several terrestrial and marine environments. Other genus may also be used such as Thimicrospira and Sulfolobus.

20 A tank made of glass fiber packed with plastic tubes with a large surface area shall be rinsed with reject water to maintain the packing material moist. The biogas is diverted through the packed column and an air stream (of atmospheric air) is added to the biogas stream. The atmospheric air is added to provide an oxygen concentration of 0,2% in the gas stream, i.e. sufficient to oxidize the H_2S and therefore not to produce an explosive mixture of biogas and oxygen. A ring side blower is used.

Combined Heat and Power plant (CHP)

25 The main component in the CHP (Component number 28) can be e.g. a gas fired engine connected to a generator for production of electric power. The main priority for the CHP is to produce as much electric power as possible relatively to heat. The engine is preferably cooled by a water circuit (90° C) and the heat is used in the plant process and to the heating of e.g. the animal houses.

30

35 The exhaust gas is used in a recuperator for steam production. The steam is used as heating source in the plant process, i.e. in the pressure sterilization unit and in the n-stripper unit II (priority one). Depending on the amount of steam it may also be used for concentrating the K in the rejectwater (seam evaporation).

Between the steam and heat circuit, there will be installed a heat exchanger, so it is possible to transfer heat from the steam system to the heat system.

5 In addition to the above mentioned genset there will be installed a steam boiler. This boiler will be used for heat production to start the process, and in addition be used as a backup for the genset.

If there is produced more steam than needed in the plant process, the rest production can be flashed of in a cooler.

10

To start the plant process (heating of fermentor tanks) etc., heat is provided by the oil fired boiler. As soon as gas production is achieved the oil burner will be switched to a gas burner. As soon as gas production is large enough to start the engine, the engine will take over the heat production.

15

Potassium separation

20 At least two alternatives for separating potassium from the rejectwater are possible (Component number 29). At relatively high levels of biogasproduction the motorgenerator engine produces excess heat (steam at 160°C) which can be used to concentrate the K. The distillate free of nutrients may be used for field irrigation or recycled through the whole plant.

25 At relatively low rates of biogasproduction a micro-filter can be used to filter particles larger than 0,01-0,1 μm from the reject water rendering the permeate suitable for treatment in a standard reverse osmosis filter. The K shall preferably be concentrated to a 10-20% solution.

30

The second aspect (BSE prions)

35 In the second preferred aspect the invention may be applied to substantially reduce and/or eliminate BSE prions contained in manures, fodder, slaughterhouse waste, flesh and bone meal and the like. This is achieved by a combination of pre-treatment and digestion. This components as listed above are supplemented with a device for additional pre-treatment of the substrate containing BSE prions, e.g. a lime pressure

cooker. The lime cooking can be used to hydrolyse a variety of organic substrates including material containing prions.

5 BSE prions are proteins resistant to protease attack. However, if treated with lime at temperatures of preferably 140-180°C, pressures at preferably 4-8 bar, and a pH of about 10-12 the prions are partly hydrolysed and thus rendered decomposable by microbial enzymes such as proteases, amidases etc. The microbes are present in the bioreactors and because the substrate is stripped for ammonia and thus low in total N versus total carbon the micro organisms are prone to produce additionally
10 extracellular proteinases and proteases capable of hydrolysing the BSE prions. The high residence time also contributes to an efficient decomposition of BSE prions.

The third aspect (concentration of N and P)

- 15 In a third preferred aspect, the invention may be applied to separate the main nutrients nitrogen (N) and phosphorus (P) from animal manures and refine the nutrients to fertilizer products of commercial or "organic" quality. This is achieved by combining the components of the first aspect with a decanter centrifuge.
- 20 The N and P are the main nutrients in the slurry which are often in excess in animal holdings. The N is stripped and collected as described in the first aspect leaving P in the remaining digested slurry. However, if subject to a decanter centrifuge, the P is removed from the slurry along with organic and inorganic solids.
- 25 The result being that preferably more than 90% of the N and P in the slurry are collected in separate fractions. The remaining reject water contains some potassium (K) and trace amounts of N and P. The reject water is thus suitable for land spreading at all times of the year.
- 30 It is possible to extract potassium (K) from the reject water by an additional coupled membrane aeration and filtration. Briefly, ceramic micro-filters are used as diffusers and filters at the same time. The filters are submerged in the reject water and operated with intermittent aeration and filtration periods. Aeration provides decomposition of the remaining organic matter and settling of inorganic flocks. The treated
35 water is thus suitable for membrane filtration because fouling and scaling is pre-

vented. Also the aeration through the same membranes (air back flushing) prevents the membranes from fouling and scaling.

5 The product produced is a concentrate (mainly containing K) and filtered water suitable for land spreading (a very limited area is required).

As under the first aspect the reject water may also be re-circulated through the animal houses.

10 The P fraction is suitable to further drying, which produces a granulate of commercial value. The N and K fractions are similarly of commercial value.

15 The third preferred aspect is in particular designed to concentrate the main nutrients N and P (and K) contained in slurry and other organic substrates to fertilizer products of commercial quality.

20 However, if decanter centrifuges are combined with the other elements of the GFE biogas and slurry separation system, in particular the N-stripping unit, it becomes of major interest to farmers. The combination of the N-stripping and decanter centrifuges means that the majority of the N and P content of the slurry is separated and collected into individual fractions. It is important to stress that the P when present in flocks is bound to be stripped by the decanter centrifuge.

25 They can be used and added to the fields according to the specific need of each nutrient. It is also possible to re-circulate the reject water taken behind the decanter centrifuge through the animal houses. Cleaning of floors and slats in the sties are achieved as is additional advantages in terms of good indoor climate, reduced ammonia and other gas emissions, frequent flushing of slurry canals etc.

30 The reject water may contain a major fraction of the potassium (K), while a smaller part will be present in the P-fraction. This means that in the scenario where slurry is stripped for ammonia and separated for P the N and P can be stored and applied according to specific needs, while the reject water can be applied throughout the year as waste water.

35

It can be estimated that the need of spreading area is about $\frac{1}{4}$ of the area required for slurry application, the harmony area, and that this $\frac{1}{4}$ part shall run through the whole harmony area over a 4-year period.

- 5 Irrespectively of the possibility of treating the reject water further (see section) some farmers will undoubtedly be more than content with the N-and P-stripping with just one single reactor for digestion of the slurry. Even the P-stripping by the decanter centrifuge may be omitted because the N is concentrated leaving a dilute slurry without N which may also be spread onto land a any time of the year, except on
10 frozen land.

- It is very satisfying that parts of the total system can be offered to farmers while others may be content with any combination more suitable to their situations. In any case it is the N-stripping which make the use of decanter centrifuges interesting to
15 practical farming.

The reject water from the complete process may be subjected to a final treatment depending on the market preferences.

- 20 Thus, the challenge is to treat the reject water to become suitable for membrane filtration and also larger volume reductions than the 50-60% mentioned. The challenge is also to use well known, cheap and robust technologies in a new context.

- The solution is the following:
25

Aeration of slurry is well known and aeration with atmospheric air during 2-4 weeks produces an aerobic digestion.

- Aeration achieves the following:
30

- Firstly, remaining ammonia is stripped and collected in an absorption column (possibly the same as the one used during pre-treatment) by a so-called low-temperature stripping of about 20° C. A wider liquid –gas ratio is required of about 1:2000 (Liao et al. 1995).
35

Secondly remaining organic matter and smell components are decomposed (Camarero et al. 1996; Burton et al 1998; Doyle and Noüe 1987; Garraway 1982; Ginnivan 1983; Blouin et al. 1988).

- 5 Thirdly possible remaining ammonia after stripping will be nitrified to nitrate (Argaman Y. 1984; Gönenc and Harremoës 1985).

10 This aeration shall be combined with filtration by employing new sewage waste technology, i.e., a micro-filtration principle combining aeration and filtration over ceramic filters (Bouhabila et al. 1998; Scott et al. 1998; Zaloum et al. 1996; Engelhardt et al. 1998). An energy efficient aeration and filtration is achieved in one operation. The aeration is further used for cleaning of the ceramic membranes by "air back flushing" (Visvanathan et al 1997; Silva et al 2000).

- 15 This leaves a water phase well suited to separation over standard osmosis membranes if necessary, because possible scaling and fouling problems are minimal. It is therefore hypothesized that a larger volume reduction can be achieved at substantial lower energy costs, although some energy is used for the aeration.

- 20 Even if membrane filtration is not used, aeration it self may be motivated by the final stripping of ammonia and by removal of the remaining smell components.

The fourth aspect (renewable energy)

- 25 The main devices of this preferred aspect are pre-treatment facilities consisting of a stripper tank and a lime cooker, and a flexible and multi step (minimum 3-step) process design of bioreactors.

30 In the fourth preferred aspect the invention may be applied to produce large amounts of biogas from a wide range of organic substrates including all types of animal manures, energy crops, crop residues and other organic wastes.

35 The pre-treatment facilities of first and second preferred aspects allow the use of a variety of organic substrates while the multi-stage biogas plant allows a complete digestion of the substrate and thus a maximum energy yield.

N-rich and recalcitrant substrates such as poultry manure and deep litter is pre-treated in the lime cooker. The cooked substrate is pre-digested in a mesopile reactor before the substrates enters the stripper tank and the subsequent reactors.

5

The pre-digestion ensures that the readily available organic matter is decomposed and the N released into solution as ammonia. The bulk of the N is thus collected in the stripper tank and the recalcitrant organic substrate being decomposed in the subsequent reactors of the energy plant. Alternatively, depending on the quality of the substrate, it may enter directly into the stripper tank before digestion in the reactors. The result is that large amounts of biogas is being produced, i.e. typically 5 to 10 times more energy than contained in slurry.

10

The treatment in the GFE biogas and separation system further ensures that the nutrients are re-circulated to agricultural land. The energy crops are digested in a separate reactor and the digested biomass is diverted to the stripper tank. In this tank the fibres not decomposed during residence in the separate reactor will be hydrolysed and the ammonia will be collected in the N-fraction. The N contained in energy crops can then be re-circulated to land and used in the production of new energy crops. About 1-3 kg N per tonnes silage can be reused.

15

20

The organic material according to the invention is preferably stripped for ammonia which in particular at thermopile temperatures is inhibitory to the biogas process (Hansen et al. 1998; Krylova et al. 1997; Kayhanian 1994). The ammonia is stripped during the pre-treatment, where the biomass is also being hydrolysed etc.

25

The process can preferably be split in a thermopile and a mesopile component (Dugba and Zhang 1999; Han et al. 1997; Gosh et al. 1985; Colleran et al. 1983). This gives rise to increased energy yields and working stability, among other thing because the biomass resides longer in the bioreactors which allows the methane bacteria time to decompose the substrate. It should be noted that more energy for heating is required as is a larger total reactor volume.

30

In addition to this two-step principle the plant shall make use of yet another reactor to preliminary digestion of poultry manure and similar N-containing biomasses. Also

35

the energy crops shall be digested in this reactor before further processing in the energy plant. During this first digestion the main fraction of the readily available organic matter is decomposed and the nitrogen released into solution in the form of ammonia. The nitrogen can now be stripped in the stripper tank and collected in the N-fraction.

Digested beets, maize, clover grass etc. contain about 1 kg N per tonnes wet weight and it is therefore important that this N is collected in the N-fraction. Poultry manure is even more N-rich and may also be digested in the pre-digester before further digestion in the main biogas plant.

The stripping and hydrolysis ensures that also the recalcitrant fibres are made available to digestion as described under the pre-treatment. The following digestion in the main biogas plant ensures a maximum gas yield.

15

The fifth aspect (animal welfare)

In a fifth preferred aspect the invention may be applied to ensure optimal animal welfare and health when stabled in the animal houses while at the same time reducing emissions of dust and gasses such as ammonia. This is achieved by flushing or re-circulating reject water through the animal houses with the purpose of cleaning and rinsing sties, floors, slats, manure canals etc. This reduces the emitting surfaces where odour, ammonia and dust may be released to the in-door air.

20

The system further allows the use of straw without increasing the emissions of dust and ammonia. The straw is a substantial welfare component, in particular for pigs but also for other animals. It provides the animals with digging and occupational material and structural fodder.

25

The reject water taken after the decanter centrifuge treatment (the third aspect) or possibly behind the first digestion (the first aspect) is well suited as a means to flush the animal housings. The flushing removes the straw and manure mixtures from the slats.

30

In further preferred aspects any combination of the core invention with the other aspects mentioned may be preferred. The first aspect is preferably included in all combinations.

5

Accordingly, it will be clear from the above descriptions of preferred aspects and embodiments of the present invention that there is provided herein:

10

A method for improved biogas production, said method comprising the steps of

- i) stripping N including ammonia from organic materials including manures and slurries thereof, and optionally hydrolysing the organic material,
- ii) diverting the thus obtained organic material to a biogas fermentor, and
- iii) obtaining biogas from the fermentation of the organic material.

15

The above method may further comprise the step of separating the solids resulting from the biogas fermentation in a separation step involving a decanter centrifuge. Separate fractions of P and/or K, preferably in granulated form, are obtained from this separation.

20

The above method in another embodiment comprises the further step of recirculating the liquids resulting from the biogas fermentation to stables or animal houses, optionally after a further purification step.

25

In another preferred embodiment, the step of N including ammonia stripping preferably occurs simultaneously with, or sequentially with, in any order, a step involving a thermal hydrolysis step and/or an alkali hydrolysis step, wherein any one or both steps take place at an increased temperature and/or an increased pressure as described herein above.

30

The above preferred embodiments thus in one embodiment solve the problems associated with environmental contamination by undesirable microbial organisms, in-

cluding Salmonella Typhimurium DT104, and/or prions associated with BSE that are present in organic materials including manures and slurries thereof.

5 In another embodiment, the above described preferred embodiments solve the problems associated with an attaining a sufficiently high hygienic standard in a stable or an animal house. This is achieved by reducing and/or eliminating undesirable microbial organisms and/or prions associated with BSE that are present in organic materials including manures and slurries thereof.

10 In yet another embodiment, the above described preferred embodiments solve the problems associated with an excessive use of expensive water resources in a stable or an animal house. This problem is solved by re-using reject water obtained from the decanter centrifuge separation step used for separating solids and liquids resulting i.e. from either pretreatment of organic material and/or N stripping including ammonia stripping and/or anaerobic fermentation leading to biogas formation. At the
15 same time, it is possible to reduce and/or eliminate the occurrence of microbial microorganisms in the reject water by further purification steps.

20 The present invention also provides cheap fertilisers of commercially acceptable standards. This is achieved by N-stripping including ammonia stripping and separation of P-containing granulates and K-containing granulates by means of decanter centrifugation following pretreatment, preferably including thermal and alkali hydrolysis.

25 In another aspect of the present invention there is provided a method for reducing the number of viable microbial organisms and/or BSE prions present in an organic material, said method comprising the steps of

- 30
- i) providing an organic material comprising solid and/or liquid parts,
 - ii) reducing, in said organic material, the number of viable microbial organisms and/or BSE prions by subjecting the organic material to
 - a) a lime pressure cooking step, and/or

35

- b) a step wherein the organic material is heated at a predetermined temperature and/or subjected to a predetermined pressure and/or subjected to addition of base or acid, and/or
- 5 c) a step resulting in at least partial hydrolysis of the organic material, wherein said processing steps a), b) and c) can occur simultaneously, or sequentially in any order, and
- 10 iii) obtaining a processed organic material comprising at least a reduced number of viable microbial organisms and/or BSE prions.

15 A wide variety of microbial organisms can be eliminated by the methods of the invention, including microbial organisms selected from animal microbial organisms, infectious microbial organisms, and parasitic pathogen microbial organisms, including any combination thereof. Examples include, but is not limited to, bacteria such as *Campylobacter*, *Salmonella*, *Yersinia*, *Ascaris*, similar microbial and parasitic organisms, as well as virus, viroids and the like.

20 The lime cooking step may also serve to sterilize the organic material in which case no viable microbial organisms survive this step of processing. The lime preferably comprises or essentially consists of CaO or Ca(OH)_2 . Preferably, any BSE prions or other prions present in the organic material are also destroyed or eliminated by the sterilization process. When there is a reduction of

25 microbial organisms and/or prions following any one of the above-mentioned steps, the reduction be e.g. a 90% reduction, an 80% reduction, a 70% reduction, a 60% reduction, or a reduction of preferably at least 50%.

30 It is preferred in one embodiment to improve the production of biogas by lime pressure cooking the organic material before the organic material is subjected to a N stripping step. However, the lime pressure cooked organic material can also be fermented prior to being subjected to a N stripping step.

35 When the organic material is of plant origin, it can preferably be ensiled before being diverting to N stripping. The ensiled organic material of plant origin can also be

fermented prior to N stripping. Organic material to be ensilaged preferably comprises annual fodder crops such as beets, maize, clover grass, and wherein optionally the top of the plants is included.

- 5 Lime pressure cooking of the organic material is preferably performed at a temperature of from about 100°C to about 250°C, under a pressure of 2-20 bar, with addition of lime sufficient to reach a pH value of from about 9 to about 12, and with an operation time of from at least one 1 minute to preferably about less than 60 minutes.

10

The amount of added lime including CaO is preferably from about 2 to about 80 g per kg dry matter, such as from about 5 to about 80 g per kg dry matter, such as from about 5 to about 60 g per kg dry matter, such as from about 10 to about 80 g per kg dry matter, such as from about 15 to about 80 g per kg dry matter, such as from about 20 to about 80 g per kg dry matter, such as from about 40 to about 80 g per kg dry matter, such as from about 50 to about 80 g per kg dry matter, such as from about 60 to about 80 g per kg dry matter.

15

- 20 An example of operating conditions of the lime pressure cooker is a temperature in the interval of about 120°C to about 220°C, a pressure from about 2 bar to preferably about less than 18 bar, and an operation time of from at least 1 minute to preferably less than 30 minutes.

25

Another example of working conditions includes a temperature in the interval of from about 180°C to about 200°C, wherein the pressure is from about 10 bar to preferably less than 16 bar, wherein the pH level is from about 10 to about 12, and wherein the operation time is from about 5 minutes to about 10 minutes.

30

The above method can be following by a number of additional steps. In one embodiment, there is provided the further steps of diverting the processed organic material to a biogas fermenter, fermenting the processed organic material and obtaining a biogas. Another further step relates to supplementing an external environment, including an agricultural field, with the processed organic material. The supplementation of the external environment, including an agricultural field, can also

be performed by using the residual material resulting from the fermentation of the processed organic material.

5 Another further step is that of stripping nitrogen (N), including ammonia, from said organic material prior to diversion to a biogas fermentor of the organic material. This results in an increased and stable biogas production. This also allows the use of N-rich biomasses to be stripped and subsequently digested in the fermentors. Biogas is produced from the fermentation of the organic material freed from at least part of the N, including ammonia.

10

The stripped nitrogen (N) including ammonia is preferably absorbed in a column before optionally being stored in a tank. When being absorbed in a column, the stripped nitrogen (N) including ammonia is preferably absorbed in a column comprising water or an acidic solution, preferably sulphuric acid, before optionally
15 being stored in a tank.

In one presently preferred embodiment there is provided a method comprising the steps of

- 20 i) eliminating, inactivating and/or reducing in said organic material the number of viable microbial organisms and/or BSE prions by subjecting the organic material to
- 25 a) a lime pressure cooking step, and/or
- b) a step wherein the organic material is heated at a predetermined temperature and/or subjected to a predetermined pressure and/or subjected to addition of base or acid, and/or
- 30 c) a step resulting in at least partial hydrolysis of the organic material, wherein said processing steps a), b) and c) can occur simultaneously, or sequentially in any order,
- 35 ii) stripping N, including ammonia, from said processed organic material,

- iii) diverting the N stripped organic material to a biogas fermenter,
- iv) fermenting the N stripped organic material, and
- 5 v) obtaining biogas and a fermented organic material at least having a reduced number of viable microbial organisms and/or BSE prions.

10 It is much preferred that essentially no BSE prions are present in the organic material resulting from the fermentation.

The step of stripping nitrogen (N), including ammonia, is preferably performed by initially adding an amount of lime to the organic material sufficient to increase the pH value to above 9 at a temperature of preferably above 40°C, such as a pH value of

15 above 10 at a temperature of preferably above 40°C, for example a pH value of above 11 at a temperature of preferably above 40°C, such as a pH value of about 12 at a temperature of preferably above 40°C.

In preferred embodiments, the temperature is preferably above 50°C, such as above

20 55°C, for example above 60°C.

The operation time is in one embodiment from 2 to 15 days, such as from 4 to 10 days, for example from 6 to 8 days. An example of one set of process parameters is a pH level of from 8-12, a temperature of from 70°C-80°C, a liquid to gas ratio of

25 less than 1:400, and an operation time of about 7 days. The alkaline conditions can be generated by adding any base. However, the pH is preferably increased by adding CaO or Ca(OH)₂.

The organic material can comprise solid and/or liquid parts such as e.g. manures and slurries thereof, crop residues, silage crops, animal carcasses or fractions

30 hereoff, slaughterhouse waste, meat and bone meal, including any combination thereof. In one embodiment, the organic material comprises a maximum of 50% solid parts, for example a maximum of 40% solid parts; such as a maximum of 30% solid parts, for example a maximum of 20% solid parts. The organic material can

35 also be in a liquid state and comprise a maximum of 10% solid parts.

5 The organic material can further comprise straw, fibres or sawdust, and in one embodiment the organic material has a high content of fibres, preferably more than 10% (w/w). The organic material can also have a high content of complex carbohydrates comprising cellulose, and/or hemicelluloses and/or lignin, such as preferably more than 10% (w/w). Lime pressure cooking cellulose containing organic material results in a disintegration of cellulose into small organic acids such as formic acid, acetic acid, lactic acid, and the like.

10 The organic material can also comprise deep litter or manure from animals, especially from cattle, pigs and poultry holdings. Additionally, animal organic material can be used, such as e.g. animal carcasses or fractions hereof, slaughterhouse waste, meat and bone meal, blood plasma or any such produce originating from animals, risk- and no-risk material with respect to the potential
15 presence of BSE-prions or other prions.

In one embodiment the organic material comprises or essentially consists of solid parts of less than 10 cm in length, such as solid parts of less than 5 cm in length, for example solid parts of less than 1 cm in length.

20 The organic material can preferably be macerated before being treated in the lime pressure cooker, preferably by using a screw conveyor equipped with a macerator, preferably one made of rust and acid proof steel. The conveyor conveys the organic material into the lime cooker where the organic material is preferably heated by
25 steam injection, or by steam in a cape around the lime cooker, or any combination thereof.

30 The organic material can also comprise proteins or similar organic molecules comprising elements, including amino acids and combinations thereof, constituting the BSE prions or other prions, and wherein said BSE prions or other prions are eliminated or destructed directly or rendered available for destruction by lime pressure cooking and/or subsequent fermentation, including anaerobic fermentation. The organic material of animal origin preferably has a high amount of nitrogen (N),
35 preferably more than 10%.

- 5 The organic material in the form of a liquid slurry can be obtained by the addition of water and/or water containing a low concentration of organic material, preferably less than 10% solid parts. The added water can be recycled water, water containing a low concentration of organic material obtained from the silage plant, and/or water collected following cleaning of stables and/or cleaning of animals, and/or water obtained from the fermentation before the N stripping process, and/or water obtained from one or more biogas producing plants, and/or water obtained during concentration of P fertilisers, and/or water obtained during concentration of K fertilisers, and/or collected rain water.
- 10 It is in one embodiment particularly preferred that the water is reject water obtained from a biogas producing plant, or reject water obtained during concentration of P fertilisers, or water obtained during concentration of K fertilisers, or collected rain water.
- 15 It is preferred that any or most of the urea and/or uric acid present in the organic material is converted into ammonia, wherein the ammonia is optionally collected following absorption to a column as described elsewhere.
- 20 Additional steps besides lime pressure cooking is mesophilic and/or thermophilic fermentation. Accordingly, the organic material which has been treated in the lime pressure cooker can subsequently be diverted into a plant for mesophilic and/or thermophilic fermentation before or after the organic material is subjected to N stripping.
- 25 Each fermentation is performed by a bacterial population capable of mesophilic or thermophilic fermentation, respectively. The fermentation is in one embodiment an anaerobic fermentation.
- 30 The fermentation is preferably performed at a temperature of from about 15°C to preferably less than about 65°C, such as at a temperature of from about 25°C to preferably less than about 55°C, for example at a temperature of from about 35°C to preferably less than about 45°C.

The fermentation is preferably performed for a period of time from about 5 to preferably less than 15 days, such as for a period of time from about 7 to preferably less than 10 days.

- 5 There is in one embodiment provided a method, wherein the biogas production is performed in one or more plants by a microbial organism, preferably a population of bacteria, and involves an anaerobic fermentation of the organic material. The bacteria preferably produce mainly methane and a smaller fraction of carbon dioxide when fermenting the organic material. The biogas production can be performed in
10 one or more plants, preferably by bacterial anaerobic fermentation of the organic material.

- In one embodiment, the biogas production is performed in two plants by anaerobic bacterial fermentation of the organic material, initially by fermentation with
15 thermophilic bacteria in a first plant, followed by diverting the thermophilically fermented organic material to a second plant, wherein fermentation with mesophilic bacteria takes place.

- 20 The thermophilic reaction conditions preferably include a reaction temperature ranging from 45°C to 75°C, such as a reaction temperature ranging from 55°C to 60°C.

- The mesophilic reaction conditions preferably include a reaction temperature ranging from 20°C to 45°C, such as a reaction temperature ranging from 30°C to
25 35°C. The thermophilic reaction as well as the mesophilic reaction is preferably performed for about 5 to 15 days, such as for about 7 to 10 days.

- Any potential foam formation can be reduced and/or eliminated by the addition of polymers, and/or plant oils, and/or one or more salts, preferably plant oil in the form
30 of rape oil. The salts preferably comprise or essentially consist of CaO and/or Ca(OH)₂.

- A desirable flocculation of substances and particles during biogas production is preferably achieved by the addition of calcium-ions capable of forming calcium-
35 bridges between organic and inorganic substances in solution or suspension,

wherein said calcium-bridges resulting in the formation of 'flocks' of particles. The addition of calcium-ions further results in the precipitation of orthophosphates, including dissolved (PO_4^{3-}), which is preferably precipitated as calcium phosphate $\text{Ca}_3(\text{PO}_4)_2$, wherein the precipitated calcium phosphate preferably remains
5 suspended in a slurry.

The obtained biogas can be diverted to a gas engine capable of producing heat and/or electricity. The heat can be used to heat the lime pressure cooker and/or the fermentation plant and/or the N stripper reactor and/or the one or more biogas
10 plant(s) and/or the animal house(s) and/or a human residence and/or heating water to be used in a household or human residence. The electricity can be diverted and sold to a commercial net for distributing electricity. In one preferred embodiment, the remaining N stripped, sterilised and fermented organic material is spread on
15 agricultural fields.

In addition to i) reducing and/or eliminating undesirable microbial organisms, ii) improving the production of biogas, and iii) providing a highly usable N stripped, sterilised and fermented organic material, the invention in another aspect pertains to
20 a method for producing N comprising fertilisers from organic materials comprising a N source, said production comprising the steps of i) collecting N including ammonia stripped from the organic material in an N stripping step, ii) absorbing said N including ammonia in water or an acidic solution preferably comprising sulphuric acid, and iii) obtaining N-fertiliser which can be spread on agricultural land.

25 The invention in yet another aspect provides a method for producing phosphor (P) comprising fertilisers from organic materials comprising a P source, said production comprising the steps of i) diverting slurry from a biogas fermenter to a separator, ii) separating the fermented organic material as well as inorganic material into a solid and a mainly liquid fraction, iii) obtaining a mainly solid fraction comprising a part of
30 the P, preferably in the form of calcium phosphate $\text{Ca}_3(\text{PO}_4)_2$, and organic phosphates suspended in the slurry, wherein said solid fraction is capable of being used as a P fertiliser capable of being spread on agricultural land when appropriate.

The separator for separating the fermented organic material as well as inorganic material into a solid and a mainly liquid fraction is preferably a decanter centrifuge. The mainly solid fraction comprising P can optionally be dried to produce a granulate comprising a P fertiliser, e.g. by allowing the P-fraction to compost in a mile store under an air permeable sheet or cover.

The reject water obtained from the biogas production and the separation from solid components can preferably be re-used in the fermentation of silage and/or in the lime pressure cooking process and/or in the N stripping process and/or in the biogas plant and/or in cleaning of the stable and/or is spread on land and/or is lead to a conventional sewage treatment plant.

Accordingly, the method in another aspect provides for the production of substantially clean reject water, said production comprising the steps of i) obtaining from the separator, preferably a decanter centrifuge, a liquid fraction comprising reject water having only a very limited content of N and P, preferably less than 5% (w/v), such as less than 1% (w/v), for example less than 0.1% (w/v), such as less than 0.01% (w/v), and essentially no sources capable of spreading zoonoses, veterinary vira, infectious bacteria, parasites or other infectious agents, including BSE prions and other prions. For some embodiments it is acceptable if the reject water contains less than 10% of the N and P originally obtained in the slurry.

In another aspect of the present invention there is provided a method for producing potassium (K) comprising fertilisers from organic materials comprising a K source, said production comprising i) diverting the liquid fraction from the first separation step (used in the separation of P containing organic materials as described herein above) to a second separation step, ii) separating the remaining organic and inorganic composition from the liquid, iii) obtaining a solid fraction comprising K, wherein said solid fraction is capable of being used as a K fertiliser capable of being spread on agricultural land when appropriate.

The second separation step preferably comprises subjecting the K comprising fraction through a ceramic micro filter operating with an intermittent aeration and filtration of the reject water, wherein preferably said aeration provides decomposition of the remaining organic material and settling of inorganic flocks.

In another aspect there is provided a method for producing clean reject water, wherein the obtained reject water is treated in an aerobic treatment system capable of eliminating and/or reducing the content of N and P within the water and preferably
5 also decomposing the remaining organic material and smell components, obtaining reject water essentially free from N and P, wherein said reject water is preferably capable of being spread on agricultural land when appropriate, or re-circulated through an animal houses.

10 The above-mentioned aeration can be performed with atmospheric air during 2-4 weeks at a temperature of about 20°C and a liquid-gas ratio of about 1:2000. Any eliminated N can be collected and diverted to the absorption column described herein elsewhere.

15 By being able to clean animal houses with the reject water treated in this way, the invention also provides in yet another aspect a method for improving the hygiene in an animal house or a stable for animals, said improvement consisting in cleaning the stable with the obtained reject water. The cleaning involves cleaning and rinsing e.g.
20 sties, floors, slats, manure canals, ceilings, ventilation canals, scrubbing exhaust air, etc., as well as reducing the emitting surfaces where odour, ammonia and dust may be released into the environment of the predetermined location including the stable.

The cleaning of the stables is in one embodiment preferably performed with reject water obtained following fermentation of energy crops or obtained following the
25 fermentation to produce biogas separation of solids and liquids or reject water obtained from a later process in the system.

It is also possible according to this aspect of the invention to improve animal welfare in a stable by utilising straw in the stable as it provides the animals with digging and
30 occupational material and structural fodder. It is preferred in one embodiment to divert the straw comprising organic material from the stable to the lime pressure cooker and hydrolyse the organic material before further processing. Another overall objective of the improvement of animal welfare in a stable resides in the possibility of being able to spray the animals in order to reduce the number of microbial

organisms as well as dust in the furs of the animals and simultaneously reduce the temperature of the animals.

5 In this way, there is provided a method integrating anaerobic fermentation of animal manures, energy crops and similar organic substrates, as well as refinement of nutrients held in the digested biomass to fertilizers of commercial quality, in combination with obtaining clean reject water.

10 The integrated method described herein above requires a system of components, or a selection of such components, as described herein in more detail elsewhere.

In one aspect, the system comprises

- 15 i) a first device, preferably animal houses or stables for holding and/or breeding animals, preferably farm animals including cows, pigs, cattle, horses, goats, sheep and/or poultry, and the like, and/or
- 20 ii) a second device, preferably at least one pre-treatment plant for pre-treatment of organic material, said organic material preferably comprises animal manure and/or animal slurry and/or plant parts, wherein said plant parts preferably comprise one or more of straw, crops, crop residues, silage, energy crops, and optionally animal carcasses or fractions hereof, slaughterhouse waste, meat and bone meal, blood plasma or any such
- 25 produce originating from animals, risk- and no-risk material with respect to the potential presence of BSE-prions or other prions, and/or
- iii) a third device, preferably an energy plant generating an improved amount of energy from a biomass comprising organic material,
- 30 in which the first device comprises
- a) a system for cleaning one or more of floors, slats, sties, manure canals, slurry canals, animals, and ventilation canals of an animal house or a stable, said cleaning involving the use of cleaning water, and/or
- 35

- b) a system to transport the cleaning water, optionally in the form of a slurry comprising cleaning water and organic material, from the animal house or stable to the second device,

5 in which the second device comprises

- a) a first pre-treatment tank, preferably a stripper tank for i) stripping N (nitrogen), including ammonia, from the slurry diverted from the first device to the second device, or ii) stripping N, including ammonia, from organic material diverted from an additional pre-treatment tank of the second device, wherein the first pre-treatment tank can optionally also be used for hydrolysing the organic material, and/or
- 10
- b) a second pre-treatment tank, preferably a lime pressure cooker for hydrolysing slurry comprising organic material diverted from the first device to the second device, wherein said hydrolysis results in eliminating, inactivating and/or reducing in number any viable microbial organisms and/or pathogenic substances present in the slurry, or a part thereof, and/or
- 15
- c) at least one tank, preferably a silage tank for generating ensiled plant material comprising at least one or more of corn/maize, energy crops, beets, and crop residues, and/or
- 20
- d) at least one second tank, preferably a pre-treatment fermenting tank to ferment silage and/or lime pressure cooked organic material, in which the fermentation conditions are selected from mesophilic fermentation conditions and/or thermophilic fermentation conditions,
- 25

in which the third device comprises

30

- a) at least one biogas fermenter to which slurry and/or organic material can be diverted from the second device for fermenting the organic material under either mesophilic fermentation conditions and/or thermophilic fermentation, said fermentation resulting in the production of biogas comprising mainly methane and/or
- 35

- 5 b) at least one tank for collection of biogas, wherein the tank is optionally connected to an outlet for distribution of biogas, or connected to a gas engine, and/or
- 10 c) at least one first separator, preferably a decanter centrifuge in which the fermented material from the at least one biogas fermenter is separated into an essentially liquid fraction in the form of reject water, and an essentially solid fraction, wherein said solid fraction comprises solid phosphor (P) comprising organic and inorganic material, and/or
- 15 d) at least one second separator, preferably a ceramic micro-filter in which the reject water from the at least one first separator is further processed, preferably by aeration and filtration, wherein said processing results in removing at least some and preferably a majority of one or more of odour components, nitrogen (N) compounds and potassium (K) compounds, wherein said separation further results in the generation of reject water comprising a reduced amount of any one or more of odour components, nitrogen (N) compounds and potassium (K) compounds as compared to the
- 20 amount prior to separation.
- 25 The system preferably comprises pipe lines constituting a closed system preventing or leading to a reduction in emissions of any one or more of dust, microbial organisms, ammonia, air, liquid or any other constituent within the system.
- 30 Liquid fractions or reject water from one or more of the at least one silage tank, the at least one pre-treatment fermenting tank, the at least one biogas fermentor, the at least one first separator and the at least one second separator is preferably re-used for cleaning of the animal house or the stable.
- 35 The liquid fractions or reject water from any one or more of the at least one silage tank, the at least one pre-treatment fermenting tank, the at least one biogas fermentor, the at least one first separator and the at least one second separator is preferably re-used in any step of the slurry separation and biogas production system to maintain the organic material in a proper fluid condition.

5 The system makes it possible to add lime, including CaO and/or Ca(OH)₂, to the organic material before said organic material enters the stripper tank for stripping N including ammonia, preferably by adding an amount of lime sufficient to generate a pH value of from about 10 to about 12, optionally in combination with a heating step and an aeration of the slurry including the organic material.

10 The organic material preferably remains in the stripper tank of the system for a period of 5 to 10 days, such as 7 days. The temperature inside the stripper tank is preferably between 60°C. and 80°C. An amount of from about 30 and 60 gram Ca(OH)₂ per kg dry matter in the organic material is preferably added to the organic material in the stripper tank or before said organic material enters the stripper tank.

15 The system facilitates collection of stripped N including ammonia from the stripper tank and diversion of said stripped N to a column in which N including ammonia is absorbed in water or an acid solution preferably comprising sulphuric acid, and optionally also storing the absorbed ammonia in a tank. The N absorbed in water or an acid solution in this way is preferably used as a fertiliser.

20 The lime pressure cooker of the system is preferably an apparatus which is initially capable of cutting the organic material into segments and subsequently capable of diverting the segmented organic material to a chamber wherein said segmented organic material is heated and simultaneously exposed to a high pressure due to the elevated temperature. The organic material to be treated in the lime pressure cooker
25 is added an amount of lime, including CaO and/or Ca(OH)₂, prior to or after entry into the lime pressure cooker.

30 Preferably CaO is added to the lime pressure cooker in an amount of from 5-10 g per kg dry matter in the organic material. The system operates at a temperature of between 100°C and 220°C, such as e.g. 180°C to 200°C. The temperature is aligned according to the organic material to be treated, a higher temperature is chosen the higher the content of cellulose, hemicellulose and lignin is in the organic material, or a higher temperature is chosen according to the risk of infectious microbial organism or pathogenic compounds including BSE prions in the organic material.

5 The pressure is between preferably between from 2 to preferably less than 16 bar, such as from 4 to preferably less than 16 bar, for example from 6 to preferably less than 16 bar, such as from 10 to preferably less than 16 bar. The system operates at the elevated temperature for about 5 to 10 minutes, but longer treatment times can also be used.

N including ammonia stripped in the lime pressure cooker is preferably collected and diverted to a column and absorbed as described herein elsewhere.

10 The system in one embodiment facilitates diversion of silage such as e.g. maize, energy crops, beets, and/or crop residues, to a mesophilic or thermophilic fermentation tank, before the material is further diverted to the stripper tank.

15 The system can also facilitate diversion of lime pressure cooked organic material to a mesophilic or thermophilic fermentation tank, before the material is diverted to the stripper tank.

20 The system also facilitates the optimization of the fermentation of the organic material and the production of biogas by providing a pre-treatment plant comprising facilities for stripping N including ammonia and/or performing alkaline hydrolysis under predetermined process parameters, including pH level, temperature, aeration, duration, foam inhibition and flocculation of suspended material.

25 The system in another embodiment ensures optimised conditions for the population of microbial organisms contained in the biogas producing fermenters. This is achieved by e.g. diverting sterilised or sanitised slurry from the stripper tank to at least a first biogas fermenter, wherein said sterilised or sanitised slurry do not inhibit or harm the population of biogas producing microbial organism in the fermenter. In particular, organic material from which N including ammonia is stripped, can be
30 diverted to a biogas reactor in which the fermentation conditions supports a mesophilic fermentation. Once the organic material has been subjected to a mesophilic fermentation, the organic material is preferably diverted to another biogas reactor of the system, in which the fermentation conditions are capable of supporting a thermophilic fermentation.

35

5 The thermophilic reaction conditions include a reaction temperature ranging from about 45°C to 75°C, such as a reaction temperature ranging from about 55°C to 60°C. The mesophilic reaction conditions include a reaction temperature ranging from about 20°C to 45°C, including a reaction temperature ranging from about 30°C to 35°C.

10 The system allows for both the thermophilic reaction and the mesophilic reaction to occur for about or at least 5-15 days, such as for about or at least 7-10 days, preferably at least 7 days.

The system comprises devices capable of preventing foam formation, wherein said devices are capable of adding e.g. polymers, and/or plant oils, including rape oil, and/or different salts, including salts comprising CaO and/or Ca(OH)₂.

15 The system makes it possible to reuse at least part of the fermented organic material from the biogas reactors in that same reactor, wherein said fermented organic material functions as an inoculum of the population of microbial organism performing the fermentation.

20 The system makes it possible in one embodiment to divert a slurry including a liquid comprising solid parts, to a first separator for separating the solid materials including a limited fraction of the liquid from the main part of the liquid fraction. Said mainly solid fraction comprises organic and inorganic material including P (phosphor) and compounds hereof. Said mainly solid fraction can be further dried and comprises a
25 fertiliser. The first separator of the system is preferably a decanter centrifuge.

The system also allows reject water from the first separator to be treated in a second separator, said second separator comprising a ceramic micro-filters in which the reject water from the first separator is further processed by aeration and
30 filtration, optionally removing any residual odour components, any residual nitrogen compounds and/or any components containing K (potassium), leaving an essentially clean reject water comprising essentially none of said residual components.

35 The system makes it possible to divert the reject water from the thermophilic biogas reactor or from the first and/or second separator to an agricultural field, to a waste

water treatment plant, or a purifying plant, or a biological treatment plant for further purification if required.

The system or the methods of the present invention can be used to:

5

eliminate or decline the emission to the environment of dust, microbial organisms, ammonia, contaminated air, liquid or any other constitution within the system, especially from animal houses.

10

improve the utilisation of the energy contained in a biomass including organic material.

15

improve the production of biogas comprising methane gas and methane-bearing gas. Said gas may be stored in a tank locally and/or can be diverted to a commercial net of distributing gas.

20

obtain separate fractions of N (nitrogen), P (phosphor) and potentially K (potassium) from organic materials. Said fractions are of commercial value and can be utilised as fertilisers to fertilise agricultural and horticultural crops.

25

obtain an improved animal welfare and improved hygiene in animal stables and in accordance to output from said animal stables. Said output comprising manure, slurry and animals to be slaughtered. The clean animals reduces the risk of infection of meat when the animals are slaughtered.

30

obtain a procedure for rendering animal carcasses or fractions hereof, meat and bone meal or any other produce from animals available for disposing off to agricultural land in the form of refined fertilizers and thus to benefit from micro- and macro- nutrients in the animal produce in the agricultural or horticultural plant production.

Claims

1. A method for reducing the number of viable microbial organisms and/or BSE prions present in an organic material, said method comprising the steps of
- 5
- i) providing an organic material comprising solid and/or liquid parts,
- ii) reducing, in said organic material, the number of viable microbial organisms and/or BSE prions by subjecting the organic material to
- 10
- a) a lime pressure cooking step, and/or
- b) a step wherein the organic material is heated at a predetermined temperature and/or subjected to a predetermined pressure and/or subjected to addition of base or acid, and/or
- 15
- c) a step resulting in at least partial hydrolysis of the organic material,
- wherein said processing steps a), b) and c) can occur simultaneously, or sequentially in any order, and
- 20
- iii) obtaining a processed organic material comprising at least a reduced number of viable microbial organisms and/or BSE prions.
- 25
2. The method of claim 1 comprising the further steps of diverting the processed organic material to a biogas fermenter, fermenting the processed organic material and obtaining a biogas.
3. The method of claim 1 comprising the further step of supplementing an external environment, including an agricultural field, with the processed organic material.
- 30
4. The method of claim 2 comprising the further step of supplementing an external environment, including an agricultural field, with the residual material resulting from the fermentation of the processed organic material.
- 35

5. The method of claim 2 comprising the further steps of stripping nitrogen (N), including ammonia, from said organic material prior to the diversion to a biogas fermentor of the organic material, and obtaining biogas from the fermentation of the organic material freed from at least part of the N, including ammonia.
- 5
6. The method of any of claims 1 to 5, wherein said microbial organisms are selected from animal microbial organisms, infectious microbial organisms, and parasitic pathogen microbial organisms, including any combination thereof.
- 10
7. The method of any of claims 1 and 5, wherein said organic material comprising solid and/or liquid parts is selected from manures and slurries thereof, crop residues, silage crops, animal carcasses or fractions hereoff, slaughterhouse waste, meat and bone meal, including any combination thereof.
- 15
8. The method of claim 5, wherein the biogas production is further improved by lime pressure cooking said organic material before the organic material is subjected to a N stripping step.
- 20
9. The method of claim 8, wherein the lime pressure cooked organic material is fermented prior to being subjected to a N stripping step.
10. The method of claim 5, wherein the organic material of plant origin is ensiled before it is diverting to a N stripping step.
- 25
11. The method of claim 10, wherein the ensiled organic material of plant origin is fermented prior to N stripping.
12. The method of claim 1 comprising the steps of
- 30
- i) eliminating, inactivating and/or reducing in said organic material the number of viable microbial organisms and/or BSE prions by subjecting the organic material to
- a) a lime pressure cooking step, and/or
- 35

- b) a step wherein the organic material is heated at a predetermined temperature and/or subjected to a predetermined pressure and/or subjected to addition of base or acid, and/or
- 5 c) a step resulting in at least partial hydrolysis of the organic material, wherein said processing steps a), b) and c) can occur simultaneously, or sequentially in any order,
- 10 ii) stripping N, including ammonia, from said processed organic material,
- iii) diverting the N stripped organic material to a biogas fermenter,
- iv) fermenting the N stripped organic material, and
- 15 v) obtaining biogas and a fermented organic material at least having a reduced number of viable microbial organisms and/or BSE prions.
13. The method of claim 12, wherein essentially no BSE prions are present in the
- 20 organic material resulting from the fermentation.
14. The method of claim 5, wherein the step of stripping nitrogen (N), including ammonia, is performed by initially adding an amount of lime to the organic material to increase the pH value to above 9 at a temperature of preferably
- 25 above 40°C.
15. The method of claim 14, wherein the pH value is above 10.
16. The method of claim 14, wherein the pH value is above 11.
- 30 17. The method of claim 14, wherein the temperature is above 50°C.
18. The method of claim 14, wherein the temperature is above 60°C.

19. The method of claim 14, wherein the operation time is from 2 to 15 days.
20. The method of claim 14, wherein the operation time is from 4 to 10 days.
- 5 21. The method of claim 14, wherein the operation time is from 6 to 8 days.
22. The method of claim 14, wherein the pH level is 8-12, the temperature 70°C-80°C, the liquid to gas ratio is less than 1:400, and the operation time is about 7 days.
- 10 23. The method of claim 14, wherein the organic material comprises a maximum of 50% solid parts.
- 15 24. The method of claim 14, wherein the organic material comprises a maximum of 40% solid parts.
25. The method of claim 14, wherein the organic material comprises a maximum of 30% solid parts.
- 20 26. The method of claim 14, wherein the organic material comprises a maximum of 20% solid parts.
- 25 27. The method of claim 14, wherein the organic material is in an fluid condition comprising a maximum of 10% solid parts.
28. The method of claim 14, wherein the organic material is a liquid slurry obtained by the addition of water and/or water containing a low concentration of organic material, preferably less than 10% solid parts.
- 30 29. The method of claim 28, wherein the added water includes water containing a low concentration of organic material obtained from the silage plant, and/or water collected following cleaning of stables and/or cleaning of animals, and/or water obtained from the fermentation before the N stripping process, and/or water obtained from one or more biogas producing plants, and/or water obtained

during concentration of P fertilisers, and/or water obtained during concentration of K fertilisers, and/or collected rain water.

- 5 30. The method of claim 28, wherein the added water is reject water obtained from a biogas producing plant.
31. The method of claim 28, wherein the added water is reject water obtained during concentration of P fertilisers.
- 10 32. The method of claim 28, wherein the added water is water obtained during concentration of K fertilisers.
33. The method of claim 28, wherein the added water is collected rain water.
- 15 34. The method of claim 14, wherein the pH is increased by adding CaO
35. The method of claim 14, wherein the pH is increased by adding $\text{Ca}(\text{OH})_2$.
- 20 36. The method of claim 14, wherein the stripped nitrogen (N) including ammonia is absorbed in a column before optionally being stored in a tank.
37. The method of claim 14, wherein the stripped nitrogen (N) including ammonia is absorbed in a column comprising water or an acidic solution, preferably sulphuric acid, before optionally being stored in a tank.
- 25 38. The method of any of claims 1-14, wherein the step of lime pressure cooking the organic material is performed at a temperature of from about 100°C to about 250°C, under a pressure of 2-20 bar, with addition of lime sufficient to reach a pH value of from about 9 to about 12, and with an operation time of from at least
- 30 one 1 minute to preferably about less than 60 minutes.
39. The method of claim 38, wherein the organic material further comprises deep litter or manure from animals, especially from cattle, pigs and poultry holdings.

- 5 40. The method of claim 38, wherein the organic material further comprises animal carcasses or fractions hereof, slaughterhouse waste, meat and bone meal, blood plasma or any such produce originating from animals, risk- and no-risk material with respect to the potential presence of BSE-prions or other prions.
- 10 41. The method of claim 38, wherein the organic material further comprises proteins or similar organic molecules comprising elements, including amino acids and combinations thereof, constituting the BSE prion or other prions, and wherein said BSE prions or other prions are eliminated or destructed directly or rendered available for destruction in the anaerobic fermentation
- 15 42. The method of claim 38, wherein the organic material further comprises straw, fibres or sawdust.
- 20 43. The method of claim 38, wherein the organic material has a high content of fibres, preferably more than 10% (w/w).
- 25 44. The method of claim 38, wherein the organic material has a high content of complex carbohydrates comprising cellulose, and/or hemicelluloses and/or lignin, preferably more than 10% (w/w).
- 30 45. The method of claim 38, wherein the organic material comprising cellulose, following lime pressure cooking, disintegrates into small organic acids such as formic acid, acetic acid, lactic acid, and the like.
- 35 46. The method of claim 38, wherein any urea or uric acid present in the organic material is converted into ammonia, and wherein the ammonia is optionally collected as described in the method of any of claims 36 and 37.
47. The method of claim 38, wherein the lime comprises or essentially consists of CaO or Ca(OH)_2 .
48. The method of claim 47, wherein the amount of added CaO is from about 2 to about 80 g per kg dry matter.

49. The method of claim 47, wherein the amount of added CaO is from about 5 to about 60 g per kg dry matter.
50. The method of claim 38, wherein the temperature is in the interval of about 120°C to about 220°C, wherein the pressure is from about 2 bar to preferably about less than 18 bar, and wherein the operation time is from at least 1 minute to preferably less than 30 minutes.
51. The method of claim 38, wherein the temperature is in the interval of about 180°C to about 200°C, wherein the pressure is from about 10 bar to preferably less than 16 bar, wherein the pH level is from about 10 to about 12, and wherein the operation time is from about 5 minutes to about 10 minutes.
52. The method of claim 38, wherein the organic material comprises or essentially consists of solid parts of less than 10 cm in length.
53. The method of claim 38, wherein the organic material comprises or essentially consists of solid parts of less than 5 cm in length.
54. The method of claim 38, wherein the organic material comprises or essentially consists of solid parts of less than 1 cm in length.
55. The method of any of claims 38 and 52-54, wherein the organic material is macerated before being treated in the lime cooker.
56. The method of claim 55, wherein a screw conveyor equipped with a macerator, preferably made of rust and acid proof steel, conveys the organic material into the lime cooker where the organic material is heated by steam injection, or by steam in a cape around the lime cooker, or any combination thereof.
57. The method of claim 38, wherein the organic material treated in the lime pressure cooker is subsequently diverted into a plant for mesophilic and/or thermophilic fermentation before the organic material is subjected to N stripping.

58. The method of claim 57, wherein the fermentation is performed by a bacterial population.
59. The method of claim 57, wherein the fermentation is an anaerobic fermentation.
60. The method of claim 57, wherein the organic material of animal origin has a high amount of nitrogen (N), preferably more than 10%.
61. The method of claim 57, wherein the fermentation is performed at a temperature of from about 15°C to preferably less than about 65°C.
62. The method of claim 57, wherein the fermentation is performed at a temperature of from about 25°C to preferably less than about 55°C.
63. The method of claim 57, wherein the fermentation is performed at a temperature of from about 35°C to preferably less than about 45°C.
64. The method of claim 57, wherein the fermentation is performed for a period of time from about 5 to preferably less than 15 days.
65. The method of claim 57, wherein the fermentation is performed for a period of time from about 7 to preferably less than 10 days.
66. The method of claim 10, wherein the organic material to be ensilaged comprises annual fodder crops such as beets, maize, clover grass, and wherein optionally the top of the plants is included.
67. A method of any of the claims 1-14, wherein the biogas production is performed in one or more plants by a microbial organism, preferably a bacteria, and involves an anaerobic fermentation of the organic material.
68. The method of claim 67, wherein the bacteria produce mainly methane and a smaller fraction of carbon dioxide when fermenting the organic material.

69. The method of claim 67, wherein the biogas production is performed in one or more plants by bacterial anaerobic fermentation of the organic material.
70. The method of claim 67, wherein the biogas production is performed in two plants by anaerobic bacterial fermentation of the organic material, initially by fermentation with thermophilic bacteria in a first plant, followed by diverting the thermophilically fermented organic material to a second plant, wherein fermentation with mesophilic bacteria takes place.
71. The method of claim 70, wherein the thermophilic reaction conditions include a reaction temperature ranging from 45°C to 75°C.
72. The method of claim 70, wherein the thermophilic reaction conditions include a reaction temperature ranging from 55°C to 60°C.
73. The method of claim 70, wherein the mesophilic reaction conditions include a reaction temperature ranging from 20°C to 45°C.
74. The method of claim 70, wherein the mesophilic reaction conditions include a reaction temperature ranging from 30°C to 35°C.
75. The method of claim 70, wherein the thermophilic reaction is performed for about 5 to 15 days.
76. The method of claim 70, wherein the thermophilic reaction is performed for about 7 to 10 days.
77. The method of claim 70, wherein the mesophilic reaction is performed for about 5 to 15 days.
78. The method of claim 70, wherein the mesophilic reaction is performed for about 7 to 10 days.

79. The method of claim 70, wherein any potential foam formation is reduced and/or eliminated by the addition of polymers, and/or plant oils, and/or one or more salts.
- 5 80. The method of claim 79, wherein the plant oil is rape oil.
81. The method of claim 79, wherein the salts comprises or essentially consists of CaO and/or Ca(OH)_2 .
- 10 82. The method of claim 67, wherein a desirable flocculation of substances and particles during biogas production is achieved by the addition of calcium-ions capable of forming calcium-bridges between organic and inorganic substances in solution or suspension, said calcium-bridges resulting in the formation of 'flocks' of particles.
- 15 83. The method of claim 82, wherein addition of calcium-ions further results in the precipitation of orthophosphates, including dissolved (PO_4^{3-}) , which is preferably precipitated as calcium phosphate $\text{Ca}_3(\text{PO}_4)_2$, wherein the precipitated calcium phosphate preferably remains suspended in a slurry.
- 20 84. The method of claim 67, wherein the obtained biogas is diverted to a gas engine capable of producing heat and/or electricity.
- 25 85. The method of claim 84, wherein said heat is used to heat the lime pressure cooker and/or the fermentation plant and/or the N stripper reactor and/or the one or more biogas plant(s) and/or the animal house(s) and/or a human residence and/or heating water to be used in a household or human residence.
- 30 86. The method of claim 84, wherein said electricity is diverted and sold to a commercial net for distributing electricity.
87. The method of claim 67, wherein the N stripped, sterilised and fermented organic material is spread on agricultural fields.

88. The method of claim 1 to 14 wherein the microbial organisms include bacteria such as Campylobacter, Salmonella, Yersinia, Ascaris, similar microbial and parasitic organisms, as well as virus, viroids and the like.
- 5 89. The method of any of claims 5 to 14, further comprising the step of producing N comprising fertilisers from organic materials comprising a N source, said production comprising the steps of i) collecting N including ammonia stripped from the organic material in an N stripping step, ii) absorbing said N including ammonia in water or an acidic solution preferably comprising sulphuric acid, and
10 iii) obtaining N-fertiliser which can be spread on agricultural land.
90. The method of claim 5 to 14 further comprising the step of producing phosphor (P) comprising fertilisers from organic materials comprising a P source, said production comprising the steps of i) diverting slurry from the biogas fermenter to
15 a separator, ii) separating the fermented organic material as well as inorganic material into a solid and a mainly liquid fraction, iii) obtaining a mainly solid fraction comprising a part of the P, preferably in the form of calcium phosphate $\text{Ca}_3(\text{PO}_4)_2$ and organic phosphates suspended in the slurry, wherein said solid fraction is capable of being used as a P fertiliser capable of being spread on
20 agricultural land when appropriate.
91. The method of claim 90, wherein the separator is a decanter centrifuge.
92. The method of claim 90, wherein the mainly solid fraction comprising P is dried
25 to produce a granulate comprising a P fertiliser, optionally by allowing the P-fraction to compost in a pile store under an air permeable sheet or cover.
93. The method of claim 5 to 14, wherein reject water obtained from the biogas production and the separation from solid components is re-used in the
30 fermentation of silage and/or in the lime pressure cooking process and/or in the N stripping process and/or in the biogas plant and/or in cleaning of the stable and/or is spread on land and/or is lead to a conventional sewage treatment plant.

- 5 94. The method of claim 5 to 14, further comprising the step of producing substantially clean reject water, said production comprising the steps of i) obtaining from the separator the liquid fraction comprising reject water having only a very limited content of N and P, and essentially no sources capable of spreading zoonoses, veterinary vira, infectious bacteria, parasites or other infectious agents, including BSE prions and other prions.
- 10 95. The method of claim 94, wherein the reject water contains less than 10% of the N and P originally obtained in the slurry.
- 15 96. The method of claim 5 to 14 further comprising the step of producing potassium (K) comprising fertilisers from organic materials comprising a K source, said production comprising i) diverting the liquid fraction from the first separation step to a second separation step, ii) separating the remaining organic and inorganic composition from the liquid, iii) obtaining a solid fraction comprising K, wherein said solid fraction is capable of being used as a K fertiliser capable of being spread on agricultural land when appropriate.
- 20 97. The method of claim 96, wherein the second separation step comprises subjecting the K comprising fraction through a ceramic micro filter operating with an intermittent aeration and filtration of the reject water, wherein preferably said aeration provides decomposition of the remaining organic material and settling of inorganic flocks.
- 25 98. A method of claim 94 further comprising the step of producing clean reject water, wherein the obtained reject water is treated in an aerobic treatment system capable of eliminating and/or reducing the content of N and P within the water and preferably also decomposing the remaining organic material and smell components, obtaining reject water essentially free from N and P, wherein said reject water is preferably capable of being spread on agricultural land when appropriate, or re-circulated through an animal houses.
- 30 99. The method of claim 98, wherein the aeration is performed with atmospheric air during 2-4 weeks.
- 35

100. The method of claim 98, wherein the temperature is kept at about 20°C.
101. The method of claim 98, wherein the liquid-gas ratio is about 1:2000.
- 5 102. The method of claim 98, wherein the eliminated N is collected and diverted to the absorption column according to claim 36 and 37.
- 10 103. A method of claim 94 further comprising the step of improving the hygiene in a stable for animals, said improvement consisting in cleaning the stable with the obtained reject water.
- 15 104. The method of claim 103, wherein the cleaning of the stable comprises cleaning and rinsing sties, floors, slats, manure canals, ceilings, ventilation canals, scrubbing exhaust air, etc., reducing the emitting surfaces where odour, ammonia and dust may be released into the environment of the predetermined location including the stable.
- 20 105. The method of claim 103, wherein the cleaning of the stable is performed with reject water obtained following fermentation of energy crops or obtained following the fermentation to produce biogas separation of solids and liquids or reject water obtained from a later process in the system.
- 25 106. A method of claim 103 further comprising a method to improve animal welfare in a stable utilising straw in the stable, it provides the animals with digging and occupational material and structural fodder, and diverting said straw comprising organic material from the stable to the lime pressure cooking, hydrolysing the organic material before further processing.
- 30 107. A method of claim 103 further comprising a method to improve animal welfare in a stable comprising spraying the animals to reduce the number of microbial organisms as well as dust on the surface of the animals and simultaneously reducing the temperature of the animals.

108. The method of any of the preceding claims further comprising a method wherein the integrated system comprising anaerobic fermentation of animal manures, energy crops and similar organic substrates, as well as refinement of nutrients held in the digested biomass to fertilizers of commercial quality, in combination with obtaining clean reject water, is situated at a farm for local processing of the organic material.
109. A system comprising
- i) a first device, preferably animal houses or stables for holding and/or breeding animals, preferably farm animals including cows, pigs, cattle, horses, goats, sheep and/or poultry, and the like, and/or
 - ii) a second device, preferably at least one pre-treatment plant for pre-treatment of organic material, said organic material preferably comprises animal manure and/or animal slurry and/or plant parts, wherein said plant parts preferably comprise one or more of straw, crops, crop residues, silage, energy crops, and optionally animal carcasses or fractions hereof, slaughterhouse waste, meat and bone meal, blood plasma or any such produce originating from animals, risk- and no-risk material with respect to the potential presence of BSE-prions or other prions, and/or
 - iii) a third device, preferably an energy plant generating an improved amount of energy from a biomass comprising organic material,
- in which the first device comprises
- a) a system for cleaning one or more of floors, slats, sties, manure canals, slurry canals, animals, and ventilation canals of an animal house or a stable, said cleaning involving the use of cleaning water, and/or
 - b) a system to transport the cleaning water, optionally in the form of a slurry comprising cleaning water and organic material, from the animal house or stable to the second device,

in which the second device comprises

- 5 a) a first pre-treatment tank, preferably a stripper tank for i) stripping N (nitrogen), including ammonia, from the slurry diverted from the first device to the second device, or ii) stripping N, including ammonia, from organic material diverted from an additional pre-treatment tank of the second device, wherein the first pre-treatment tank can optionally also be used for hydrolysing the organic material, and/or
- 10 b) a second pre-treatment tank, preferably a lime pressure cooker for hydrolysing slurry comprising organic material diverted from the first device to the second device, wherein said hydrolysis results in eliminating, inactivating and/or reducing in number any viable microbial organisms and/or pathogenic substances present in the slurry, or a part thereof, and/or
- 15 c) at least one tank, preferably a silage tank for generating ensiled plant material comprising at least one or more of corn/maize, energy crops, beets, and crop residues, and/or
- 20 d) at least one second tank, preferably a pre-treatment fermenting tank to ferment silage and/or lime pressure cooked organic material, in which the fermentation conditions are selected from mesophilic fermentation conditions and/or thermophilic fermentation conditions,

25 in which the third device comprises

- a) at least one biogas fermenter to which slurry and/or organic material can be diverted from the second device for fermenting the organic material under either mesophilic fermentation conditions and/or thermophilic fermentation, said fermentation resulting in the production of biogas comprising mainly methane and/or
- 30 b) at least one tank for collection of biogas, wherein the tank is optionally connected to an outlet for distribution of biogas, or connected to a gas engine, and/or
- 35

- 5 c) at least one first separator, preferably a decanter centrifuge in which the fermented material from the at least one biogas fermenter is separated into an essentially liquid fraction in the form of reject water, and an essentially solid fraction, wherein said solid fraction comprises solid phosphor (P) comprising organic and inorganic material, and/or
- 10 d) at least one second separator, preferably a ceramic micro-filter in which the reject water from the at least one first separator is further processed, preferably by aeration and filtration, wherein said processing results in removing at least some and preferably a majority of one or more of odour components, nitrogen (N) compounds and potassium (K) compounds, wherein said separation further results in the generation of reject water comprising a reduced amount of any one or more of odour components,
- 15 nitrogen (N) compounds and potassium (K) compounds as compared to the amount prior to separation.
- 20 110. A system according to claim 109, wherein liquid fractions or reject water from one or more of the at least one silage tank, the at least one pre-treatment fermenting tank, the at least one biogas fermentor, the at least one first separator and the at least one second separator is re-used for cleaning of the animal house or the stable .
- 25 111. A system according to claim 109, wherein the system comprises pipe lines constituting a closed system preventing or leading to a reduction in emissions of any one or more of dust, microbial organisms, ammonia, air, liquid or any other constituent within the system.
- 30 112. A system according to claim 109, wherein liquid fractions or reject water from any one or more of the at least one silage tank, the at least one pre-treatment fermenting tank, the at least one biogas fermentor, the at least one first separator and the at least one second separator is re-used in any step of the slurry separation and biogas production system to maintain the organic material in a proper fluid condition.
- 35

113. A system according to claim 109, wherein lime including CaO and/or Ca(OH)_2 is added to the organic material before said organic material enters the stripper tank for stripping N including ammonia, preferably by adding an amount of lime sufficient to generate a pH value of from about 10 to about 12, optionally
5 in combination with a heating step and an aeration of the slurry including the organic material.
114. A system according to claim 109, wherein the organic material remains in the stripper tank for a period of 5 to 10 days, optionally 7 days.
10
115. A system according to claim 109, wherein the temperature inside the stripper tank is between 60°C . and 80°C .
116. A system according to claim 109, wherein an amount of between 30
15 and 60 gram Ca(OH)_2 per kg dry matter in the organic material is added to the organic material in the stripper tank or before said organic material enters the stripper tank.
117. A system according to claim 109, wherein the stripped N including
20 ammonia is collected from the stripper tank and diverted to a column in which ammonia is absorbed in water or an acid solution preferably comprising sulphuric acid, and optionally storing the absorbed ammonia in a tank.
118. A system according to claim 109, wherein the N absorbed in an acid
25 solution is utilised as a fertiliser.
119. A system according to claim 109, wherein the lime pressure cooker is an apparatus which first cuts the organic material into segments and second
30 diverts the segmented organic material to a chamber wherein said segmented organic material is heated and simultaneously exposed to a high pressure due to the elevated temperature.
120. A system according to claim 109, wherein the organic material to be treated in the lime pressure cooker is added an amount of lime.

121. A system according to claim 109, wherein the organic material to be treated in the lime pressure cooker is added lime in the form of CaO or Ca(OH)_2 .
- 5 122. A system according to claim 109, wherein the organic material to be treated in the lime pressure cooker is added CaO .
- 10 123. A system according to claim 109, wherein the organic material to be treated in the lime pressure cooker is added CaO of 5-10 g per kg dry matter in the organic material.
- 15 124. A system according to claim 109, wherein the temperature of the organic material in the lime pressure cooker is between 100°C and 220°C . Said temperature is aligned according to the organic material to be treated, a higher temperature is chosen the higher the content of cellulose, hemicellulose and lignin is in the organic material, or a higher temperature is chosen according to the risk of infectious microbial organism or pathogenic compounds including BSE prions in the organic material.
- 20 125. A system according to claim 109, wherein the temperature of the organic material in the lime pressure cooker is between 180°C and 200°C .
- 25 126. A system according to claim 109, wherein the pressure of the organic material in the lime pressure cooker is between 10 and 16 bar.
- 30 127. A system according to claim 109, wherein the organic material in the lime pressure cooker is treated with the elevated temperature for 5 to 10 minutes.
- 35 128. A system according to claim 109, wherein N including ammonia stripped in the lime pressure cooker is collected and diverted to a column and absorbed as described in claim 117.
129. A system according to claim 109, wherein silage of, but not limited to, maize, energy crops, beets, and/or crop residues, is diverted to a mesophilic or thermophilic fermentation tank, before further diverted to the stripper tank.

130. A system according to claim 109, wherein lime pressure cooked organic material is diverted to a mesophilic or thermophilic fermentation tank, before further diverted to the stripper tank.
- 5
131. A system according to claim 109, wherein the fermentation of the organic material and the production of biogas is optimised by pre-treatment comprising stripping N including ammonia and alkaline hydrolysis at conditions including a proper pH level, temperature, aeration, duration, foam inhibition and
- 10 flocculation of suspended material.
132. A system according to claim 109, wherein the microbial organism conditions in the biogas producing fermenters is optimised by diverting sterilised or sanitised slurry from the stripper tank to the first biogas fermenter, said
- 15 sterilised or sanitised slurry do not inhibit or harm the population of biogas producing microbial organism in the fermenters.
133. A system according to claim 109, wherein the organic material from which N including ammonia is stripped, is diverted to a biogas reactor in which
- 20 the conditions is mesophilic.
134. A system according to claim 109, wherein the organic material which is mesophilic fermented, is diverted to a biogas reactor in which the conditions is thermophilic.
- 25
135. A system according to claim 133, wherein the thermophilic reaction conditions include a reaction temperature ranging from 45oC to 75oC.
136. A system according to claim 133, wherein the thermophilic reaction
- 30 conditions include a reaction temperature ranging from 55oC to 60oC.
137. A system according to claim 133, wherein the mesophilic reaction conditions include a reaction temperature ranging from 20oC to 45oC.

138. A system according to claim 133, wherein the mesophilic reaction conditions include a reaction temperature ranging from 30°C to 35°C.
- 5 139. A system according to claim 133, wherein the thermophilic reaction is performed for 5-15 days.
140. A system according to claim 133, wherein the thermophilic reaction is performed for 7-10 days.
- 10 141. A system according to claim 133, wherein the mesophilic reaction is performed for 5-15 days.
142. A system according to claim 133, wherein the mesophilic reaction is performed for 7-10 days.
- 15 143. A system according to claim 133, wherein a potential foam formation is limited by adding polymers, and/or plant oils, and/or different salts.
144. A system according to claim 143, wherein the plant oil is rape oil.
- 20 145. A system according to claim 143, wherein the salts comprises CaO and/or Ca(OH)₂.
146. A system according to claim 109, wherein the organic material is fermented mesophilic and thermophilic each for at least 7 days.
- 25 147. A system according to claim 109, wherein part of the fermented organic material from the biogas reactors is reused in that particular reactor, said fermented organic material function as an inoculum of the population of microbial organism performing the fermentation.
- 30 148. A system according to claim 109, wherein the fermented organic material comprising a slurry including a liquid with solid material, is diverted to a first separator, separating the solid materials including a limited fraction of the liquid from the main part of the liquid fraction. Said mainly solid fraction
- 35

comprises organic and inorganic material including P (phosphor) and compounds hereof. Said mainly solid fraction can be further dried and comprises a fertiliser.

- 5 149. A system according to claim 109, wherein the first separator is a decanter centrifuge.
- 10 150. A system according to claim 109, wherein the reject water from the first separator is treated in a second separator, said second separator comprising a ceramic micro-filters in which the reject water from the first separator is further processed by aeration and filtration, optionally removing any residues of odour components, any residues of nitrogen compounds and any components containing K (potassium), leaving a clean reject water.
- 15 151. A system according to claim 109, wherein the reject water from the thermophilic biogas reactor or from the first or second separator is diverted to the land, to a waste water treatment plant or a purifying plant, optionally a biological treatment plant.
- 20 152. The utility of a system or a method of any of claim 4 -151, to eliminate or decline the emission to the environment of dust, microbial organisms, ammonia, contaminated air, liquid or any other constitution within the system, especially from animal houses.
- 25 153. The utility of a system or a method of any of claim 4 -151, to improve the utilisation of the energy contained in a biomass including organic material.
- 30 154. The utility of a system or a method of any of claim 4 -151, to improve the production of biogas comprising methane gas and methane-bearing gas. Said gas may be stored in a tank locally and/or can be diverted to a commercial net of distributing gas.
155. The utility of a system or a method of any of claim 4 -151, to obtain separate fractions of N (nitrogen), P (phosphor) and potentially K (potassium)

from organic materials. Said fractions are of commercial value and can be utilised as fertilisers to fertilise agricultural and horticultural crops.

- 5 156. The utility of a system or a method of any of claim 4 -151, to obtain an improved animal welfare and improved hygiene in animal stables and in accordance to output from said animal stables. Said output comprising manure, slurry and animals to be slaughtered. The clean animals reduces the risk of infection of meat when the animals are slaughtered.
- 10 157. The utility of a system or a method of any of claim 4-151, to obtain a procedure for rendering animal carcasses or fractions hereof, met and bone meal or any other produce from animals available for disposing off to agricultural land in the form of refined fertilizers and thus to benefit from micro- and macro-nutrients in the animal produce in the agricultural or horticultural plant
- 15 production.

Fig. 1

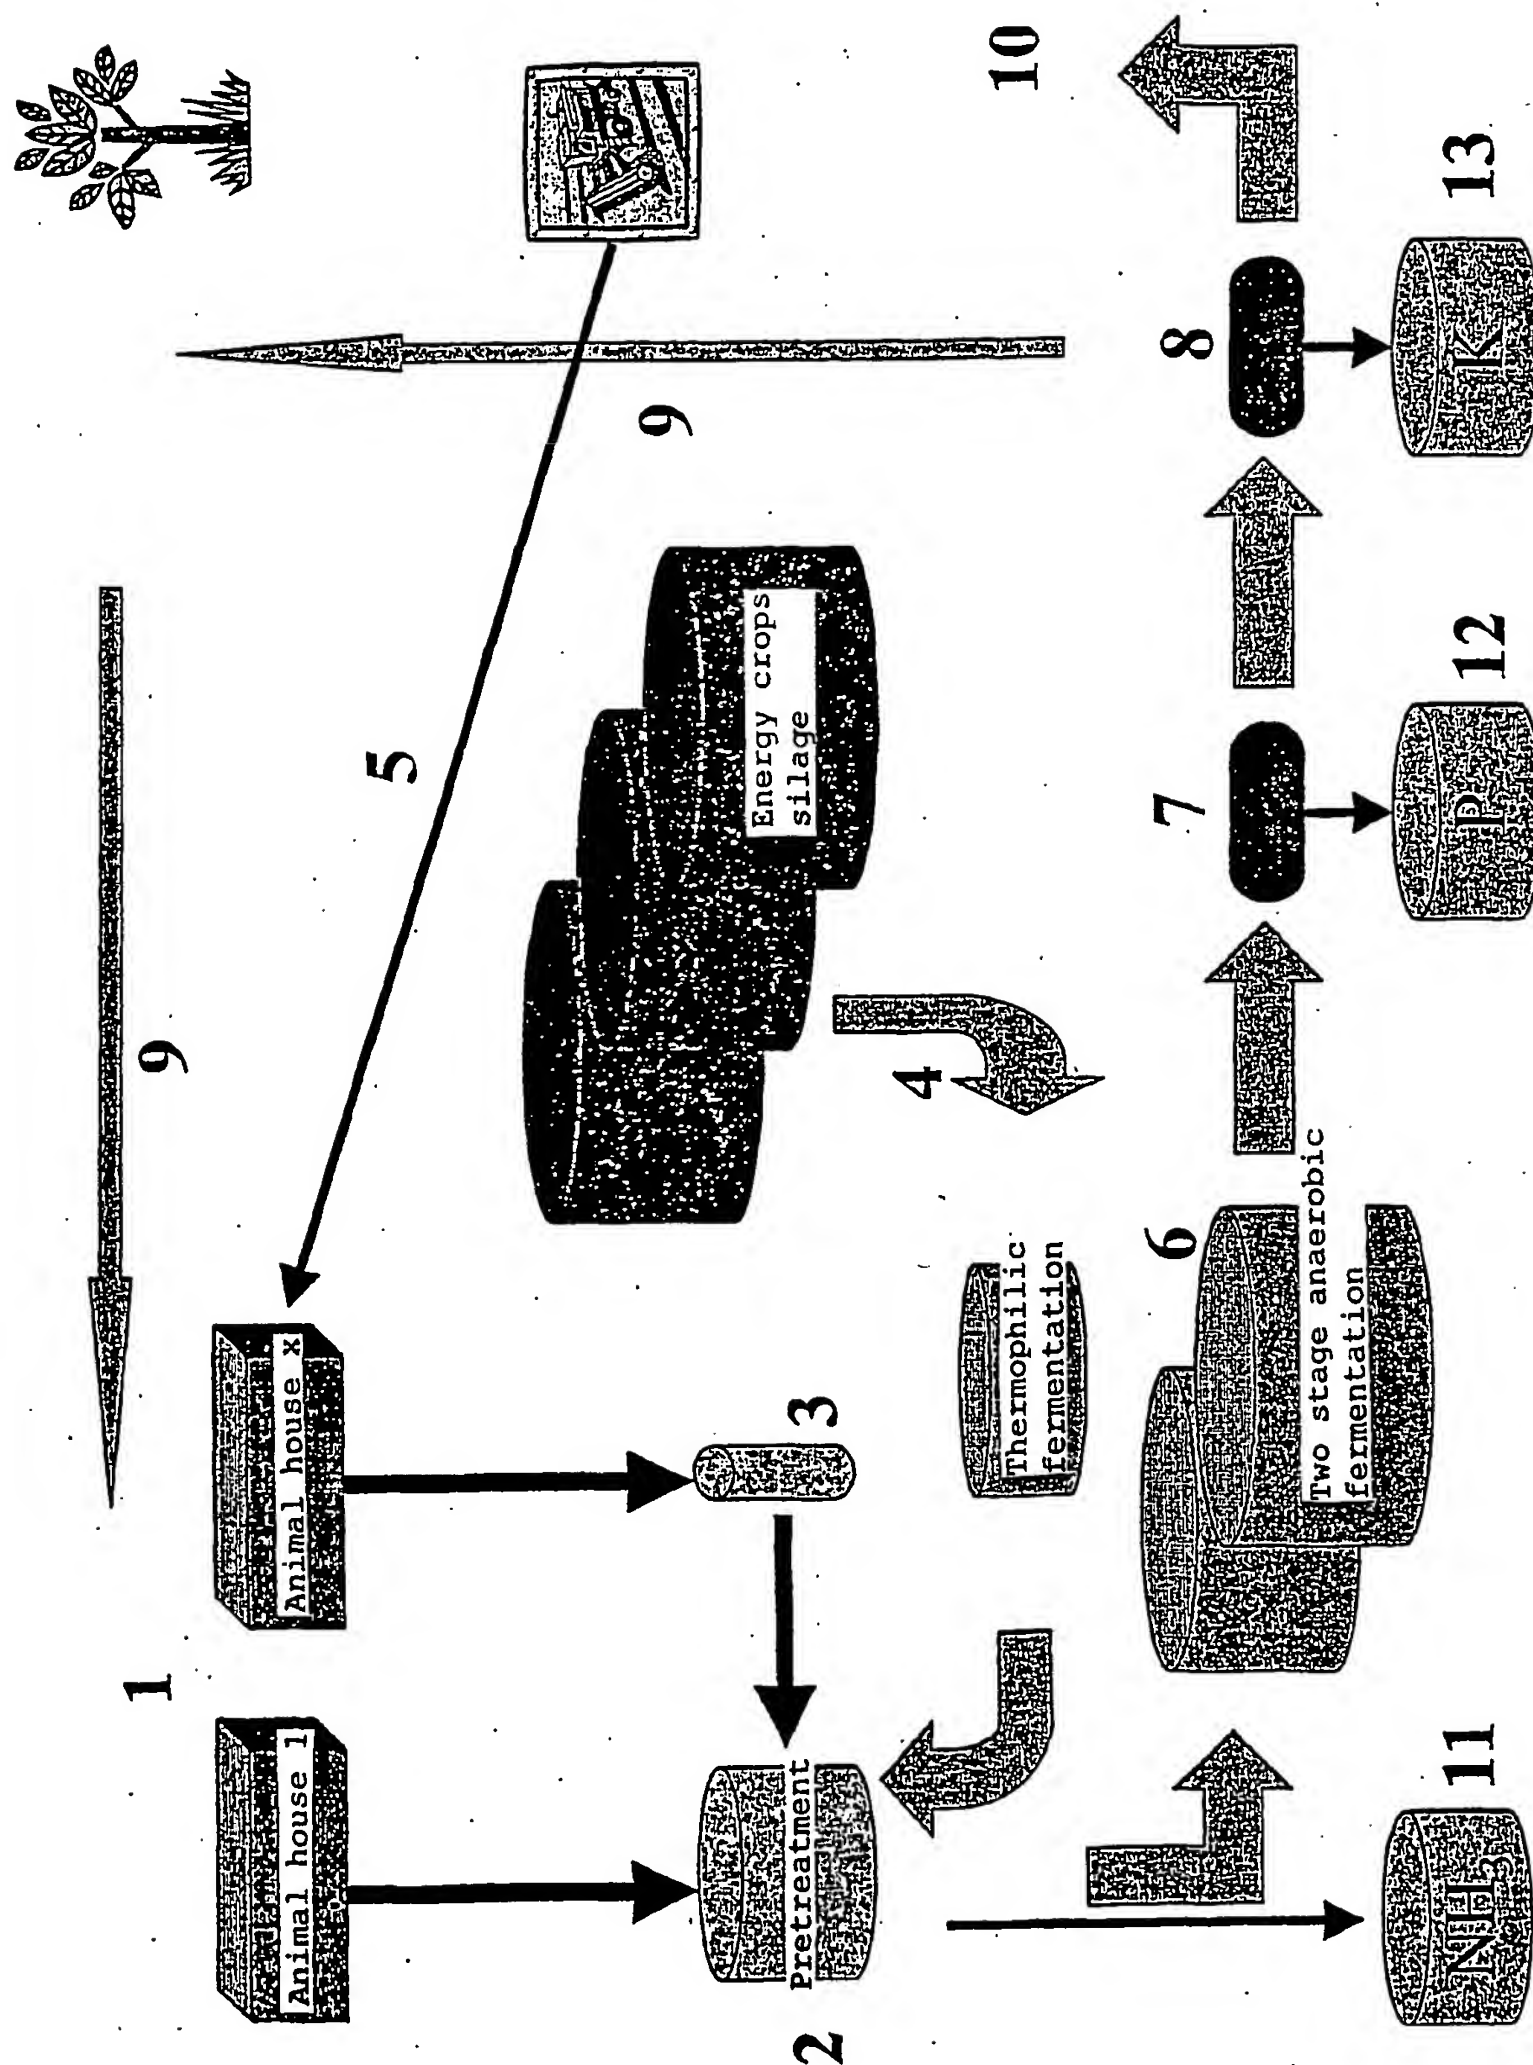


Fig. 3

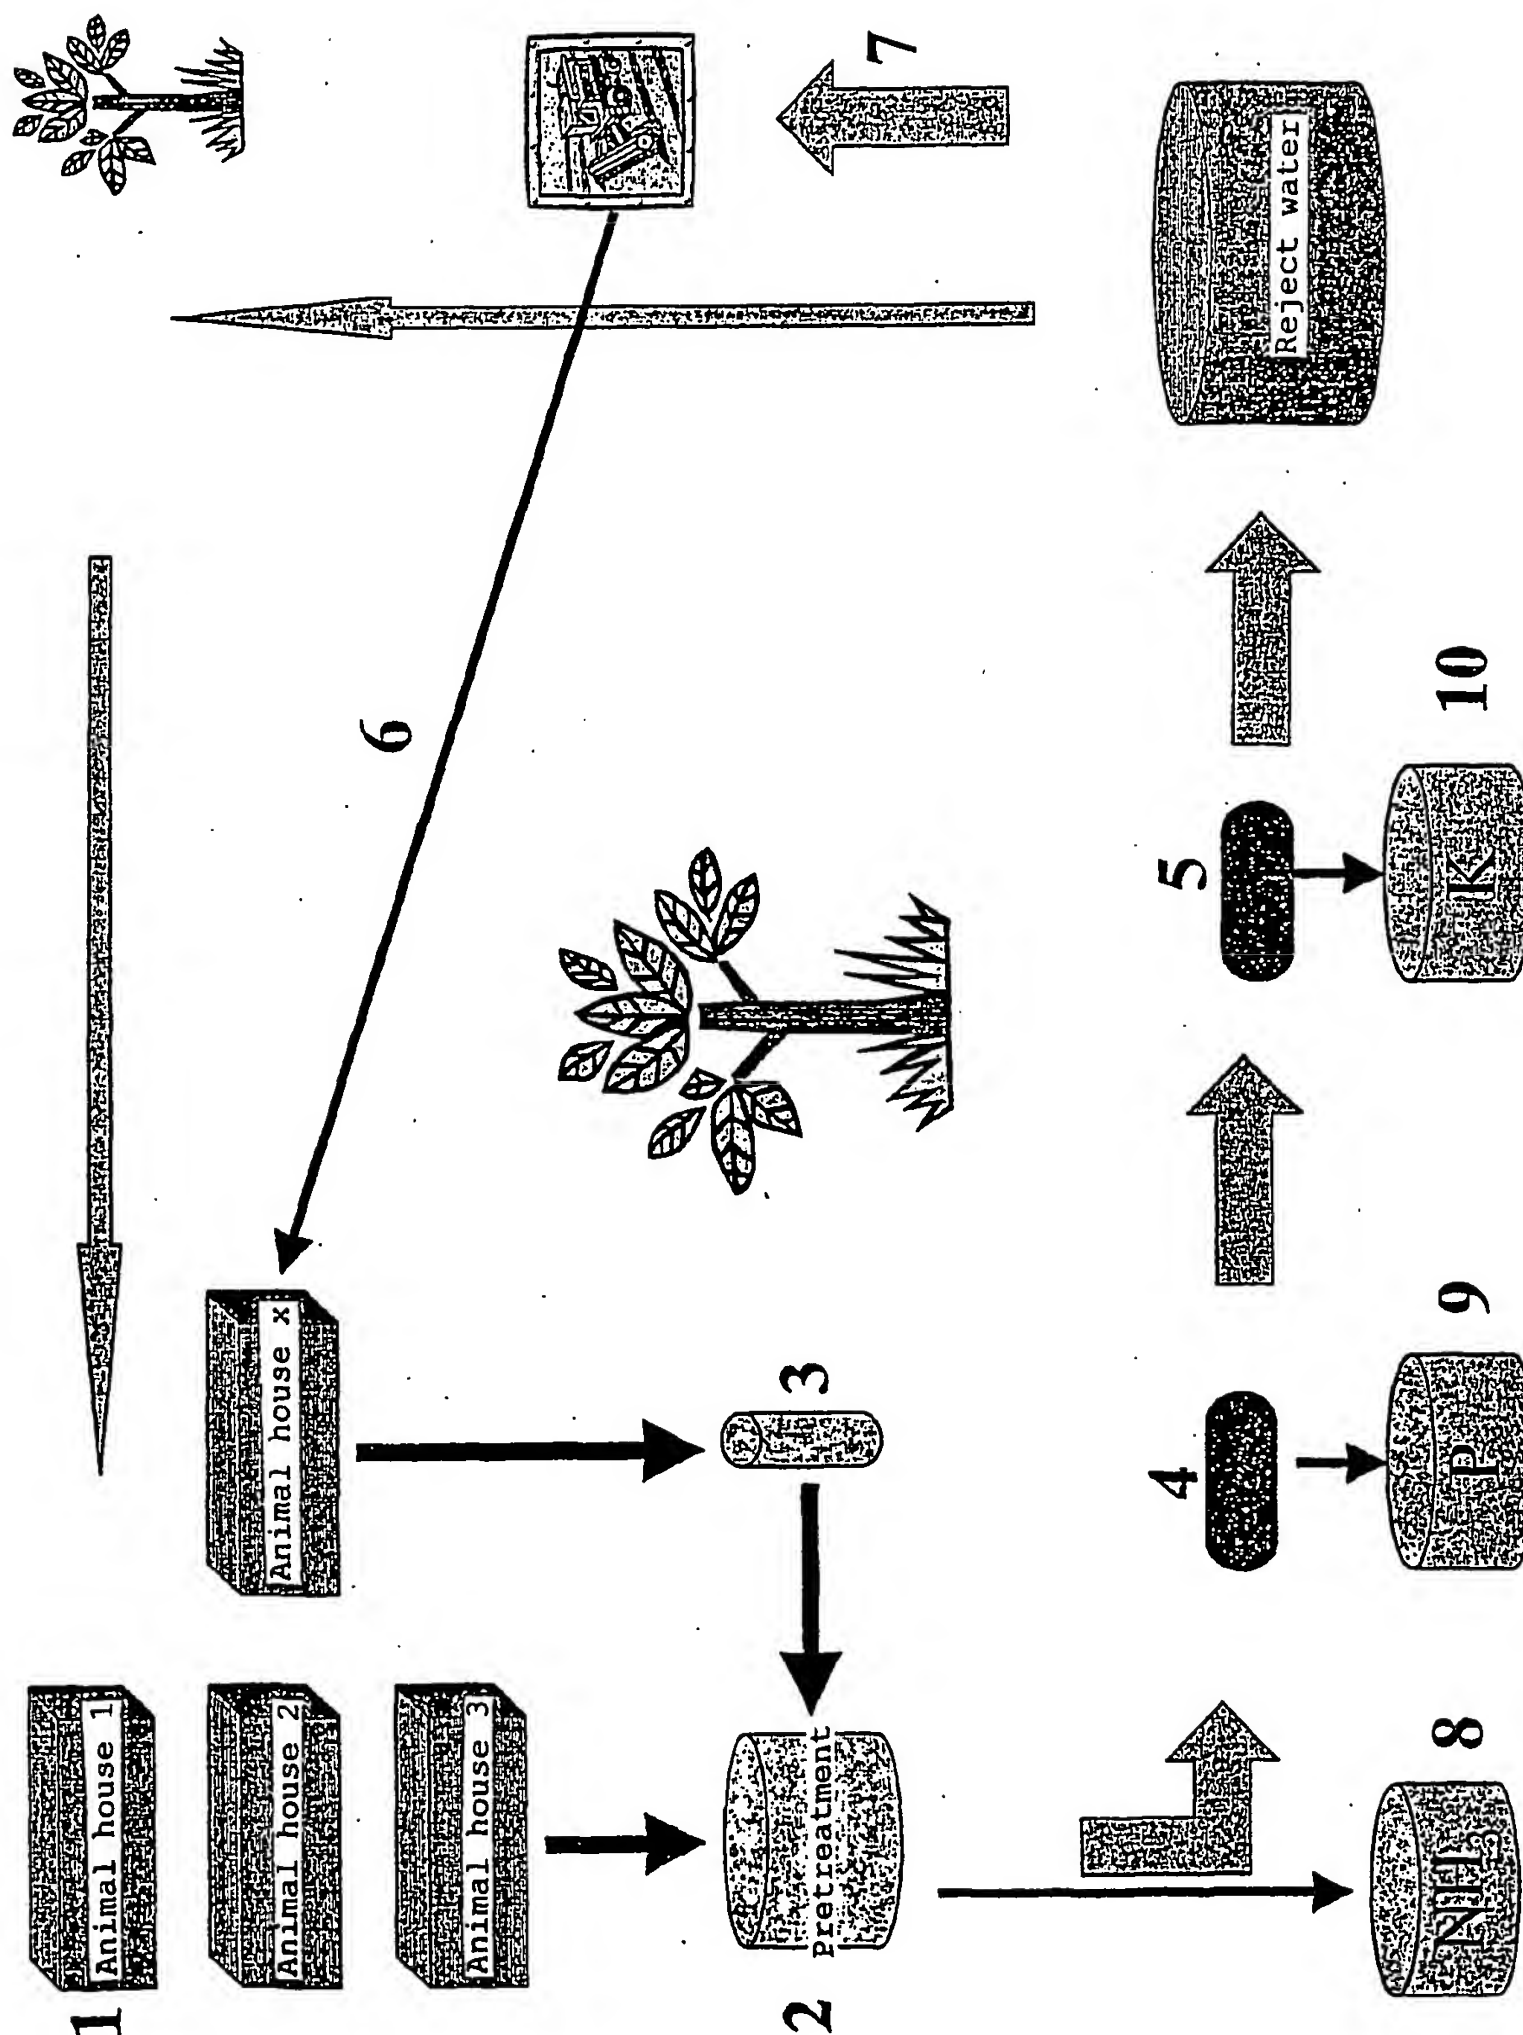


Fig. 4

4/6



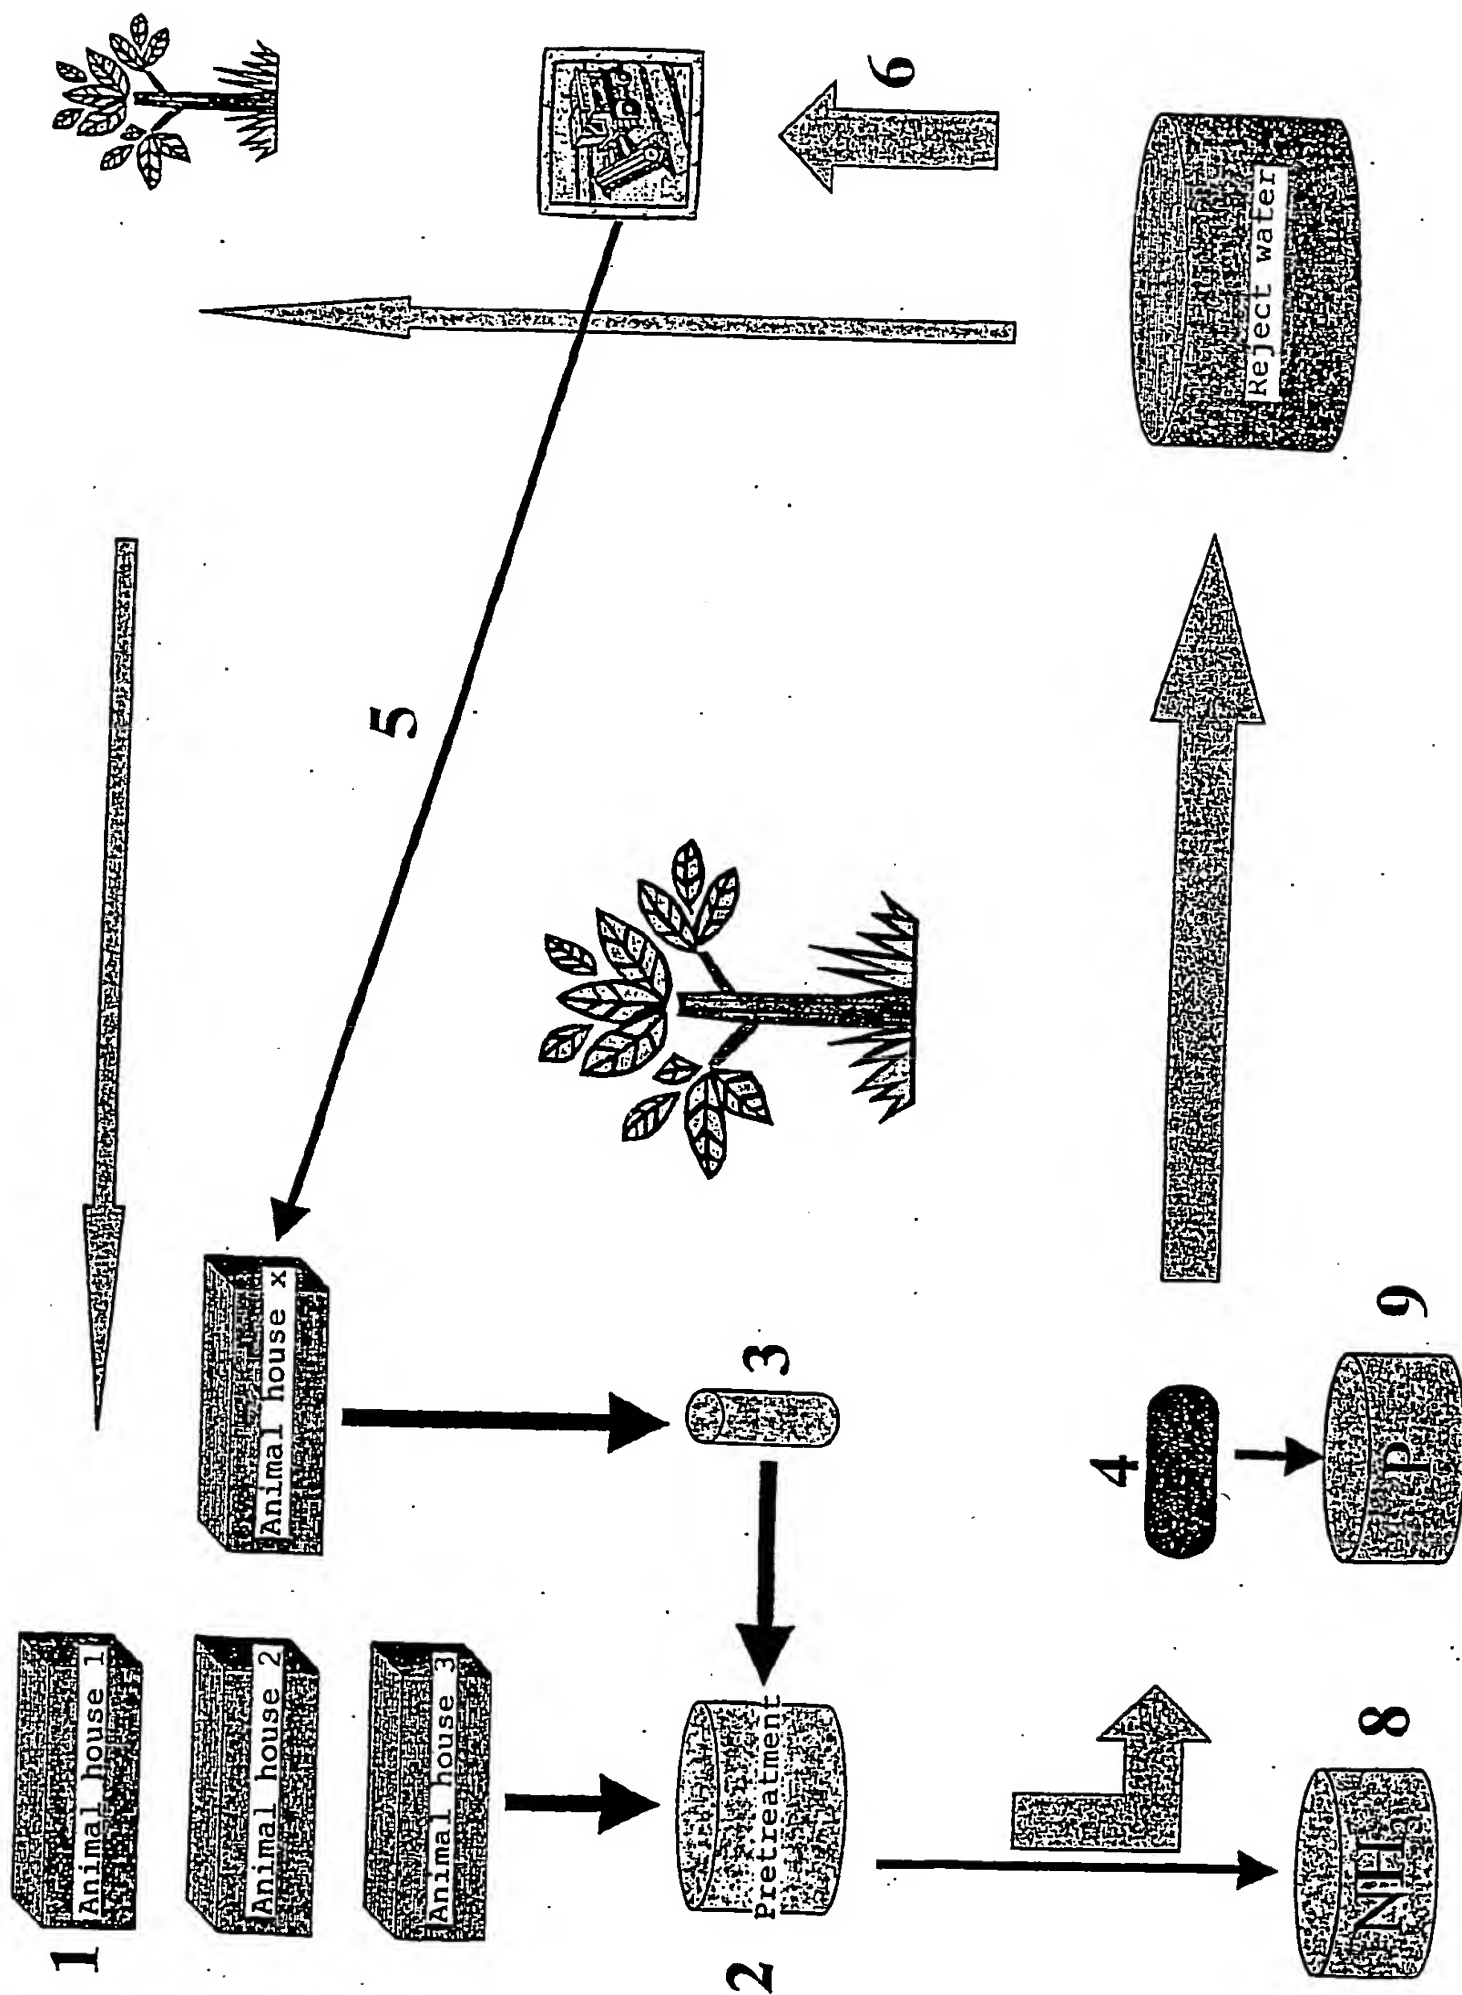


Fig. 5

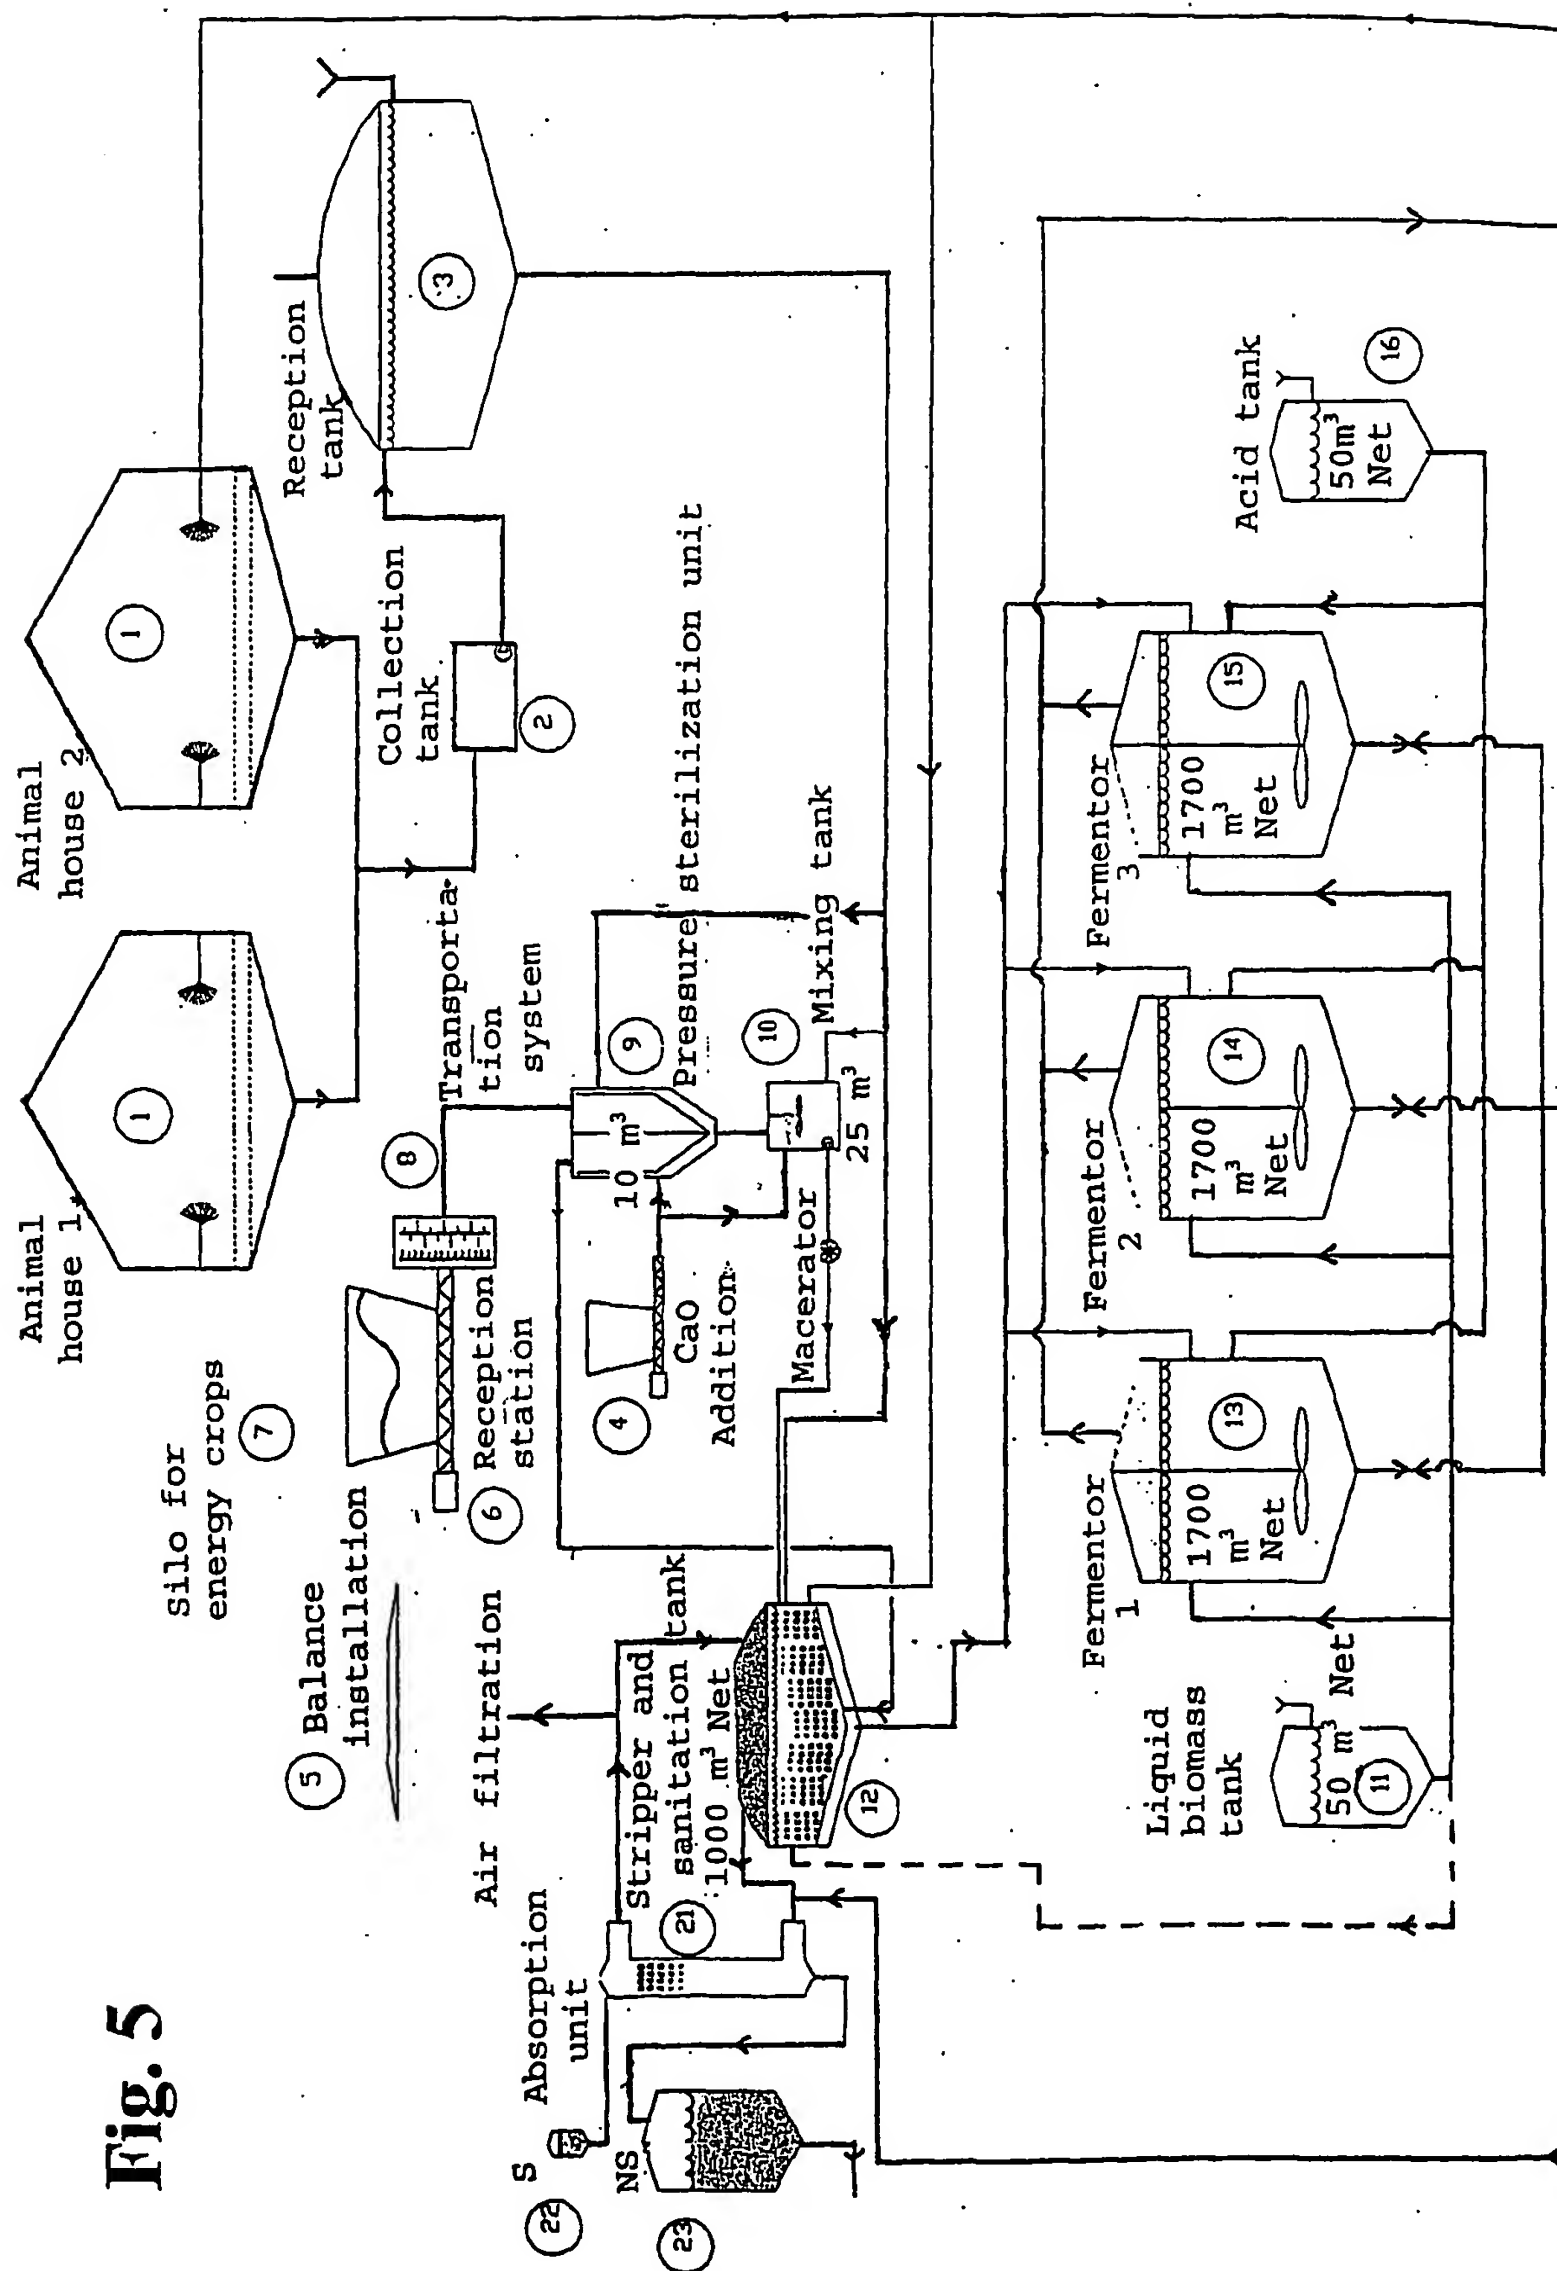

6/6

Fig. 6

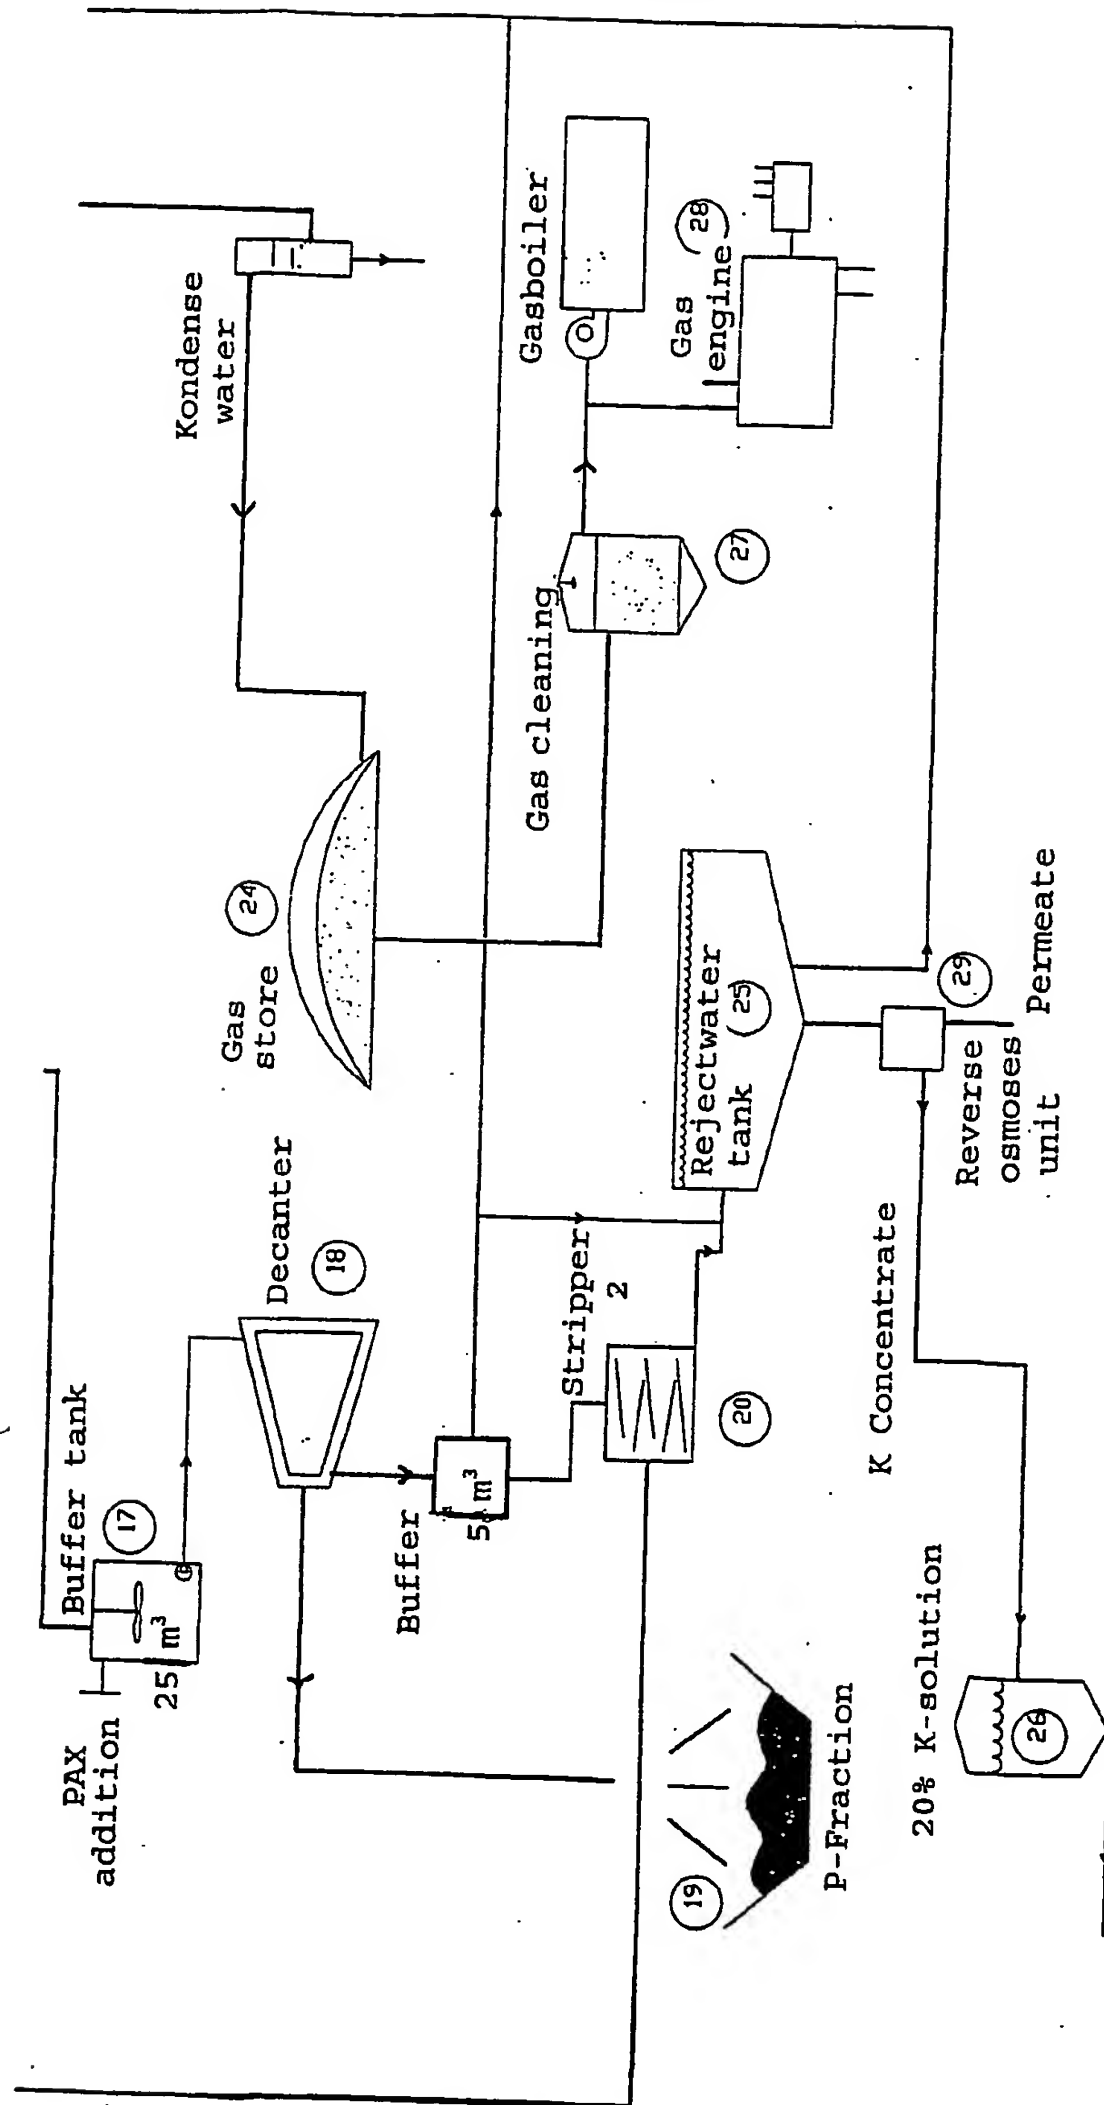

INTERNATIONAL SEARCH REPORT

International Application No
PCT/DK 01/00553

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 A61L2/04 A61L2/16 A61L11/00 A01C3/02 C05F1/02
C05F3/06 //A61L101:20

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61L A01C C05F C02F B09B C12M B01D A23J C12P

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

PAJ, EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 866 042 A (LURGI ENTSORGUNGSTECHNIK GMBH) 23 September 1998 (1998-09-23)	1-4,6,7, 67-69, 82,83, 88,109, 111,148, 149, 151-154, 157
Y	column 1, line 1 - line 38 column 2, line 27 - line 57 column 5, line 9 - line 13	5,14-30, 33-37, 70-79, 81,87, 98-102
	---	-/--

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "Z" document member of the same patent family

Date of the actual completion of the international search

7 December 2001

Date of mailing of the international search report

11. 01. 02

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Jens Waltin

INTERNATIONAL SEARCH REPORT

International Application No
PCT/DK 01/00553

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	DE 196 28 521 A (KRAFTWERKS UND ANLAGENBAU AG) 15 January 1998 (1998-01-15)	1,2,6,7, 67-69, 88,109, 111,112, 151-154
Y	column 1, line 1 - line 68 column 2, line 9 column 2, line 20 - line 30 column 3, line 22 - line 30	
X	EP 1 021 958 A (S I C I T S P A) 26 July 2000 (2000-07-26)	12,13, 93-95, 98-108, 131-143, 145
Y	* especially sections (0002),(0004),(0006),(0009),(0017) the whole document	1,6,7, 38-42, 45-50, 52-56, 109, 119-124, 152
X	DATABASE WPI Section Ch, Week 198209 Derwent Publications Ltd., London, GB; Class D15, AN 1982-16697E XP002902193 & JP 57 012896 A (DAIKI GUM KOGYO K), 22 January 1982 (1982-01-22) abstract	8 109,111, 113-118
Y		5,8, 12-30, 33-37, 87, 93-95, 131-143, 145
X	US 5 593 590 A (STEYSKAL FELIX) 14 January 1997 (1997-01-14)	109-111, 147, 152-154, 156
Y	the whole document	103-108, 134-143, 145

	-/--	

INTERNATIONAL SEARCH REPORT

In International Application No
 PCT/ DK 01/00553

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5 746 919 A (DAGUE RICHARD R ET AL) 5 May 1998 (1998-05-05) column 20, line 30 - line 40 abstract; claim 27	109,111, 146
Y	---	70-79,81
Y	WO 89 00548 A (MATHIESEN NIELS LANG) 26 January 1989 (1989-01-26) abstract	79,81
X	---	
X	DE 198 09 299 A (GANTEFORT) 9 September 1999 (1999-09-09) column 1, line 24 - line 36 column 1, line 52 - line 63 column 2, line 55 - line 67 column 4, line 13 - line 31	1,2,6,7, 67-69, 84,85, 88,109, 111
X	---	
X	EP 0 218 896 A (SULZER AG) 22 April 1987 (1987-04-22) column 1, line 30 - line 54 column 2, line 20 - line 36	1-4,6,7, 67-69, 88,89, 109, 152-154, 157
X	---	
X	DE 196 23 163 A (MUELLER & JESSEN GMBH ;BIOPHIL GMBH (DE)) 5 December 1996 (1996-12-05) column 1, line 20 - line 37 column 2, line 33 -column 4, line 13 figure 1, the details 13, 11.1, 11.2.	1-4,6,7, 67-69, 84-86, 109,111, 112,148, 152-154, 157
X	---	
X	DE 196 25 288 A (OBERSCHMID KARL) 9 January 1997 (1997-01-09) abstract	1,3,6,7, 88,109, 111,152, 157
X	---	
X	VINCENT S. CHANG ET AL : "Lime pretreatment of switchgrass" APPLIED BIOCHEMISTRY AND BIOTECHNOLOGY, vol. 63-65, 1997, pages 3-19, XP002902194 abstract	109, 119-121, 124

INTERNATIONAL SEARCH REPORT

International application No.
PCT/DK 01/00553

Box I Observations where certain claims were found unsearchable (Continuation of Item 1 of first sheet)

This International Search Report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1. ☐ Claims Nos.:
because they relate to subject matter not required to be searched by this Authority, namely:

2. ☒ Claims Nos.: 109
because they relate to parts of the International Application that do not comply with the prescribed requirements to such an extent that no meaningful International Search can be carried out, specifically:
see FURTHER INFORMATION sheet PCT/ISA/210

3. ☐ Claims Nos.:
because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

Box II Observations where unity of invention is lacking (Continuation of item 2 of first sheet)

This International Searching Authority found multiple inventions in this international application, as follows:

1. ☐ As all required additional search fees were timely paid by the applicant, this International Search Report covers all searchable claims.

2. ☐ As all searchable claims could be searched without effort justifying an additional fee, this Authority did not invite payment of any additional fee.

3. ☐ As only some of the required additional search fees were timely paid by the applicant, this International Search Report covers only those claims for which fees were paid, specifically claims Nos.:

4. ☐ No required additional search fees were timely paid by the applicant. Consequently, this International Search Report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:

Remark on Protest

- ☐ The additional search fees were accompanied by the applicant's protest.
- ☐ No protest accompanied the payment of additional search fees.

FURTHER INFORMATION CONTINUED FROM PCT/ISA/ 210

Continuation of Box I.2

Claims Nos.: 109

Present claim 109 relates to an extremely large number of possible systems. In particular, the many "and/or" expressions in claim 109 give rise to such a large number of possible permutations, that a lack of clarity within the meaning of Article 6 PCT arises. This makes a meaningful search of claim 109 impossible.

Consequently, the search has been carried out for those parts of the application which appear to be clear, namely a process in accordance with claims 1-108 for reducing the number of viable organisms and/or BSE prions in an organic material, which process in its widest sense comprises a lime pressure cooking step or a step resulting in hydrolysis. The search has included the corresponding apparatus for carrying out such a process as well.


The search has not included all the possible permutations of claim 109, which in their widest sense may disclose such well-known apparatus as, for example, only a tank or only a stable with a water transport system.

The applicant's attention is drawn to the fact that claims, or parts of claims, relating to inventions in respect of which no international search report has been established need not be the subject of an international preliminary examination (Rule 66.1(e) PCT). The applicant is advised that the EPO policy when acting as an International Preliminary Examining Authority is normally not to carry out a preliminary examination on matter which has not been searched. This is the case irrespective of whether or not the claims are amended following receipt of the search report or during any Chapter II procedure.

INTERNATIONAL SEARCH REPORT

Int. Application No
PCT/DK 01/00553

Patent document cited in search report		Publication date		Patent family member(s)	Publication date
EP 0866042	A	23-09-1998	DE	19711355 A1	24-09-1998
			EP	0866042 A2	23-09-1998
DE 19628521	A	15-01-1998	DE	19628521 A1	15-01-1998
EP 1021958	A	26-07-2000	EP	1021958 A1	26-07-2000
JP 57012896	A	22-01-1982	JP	58041916 B	16-09-1983
US 5593590	A	14-01-1997	AT	137727 T	15-05-1996
			CA	2104791 A1	28-08-1992
			DE	59206247 D1	13-06-1996
			WO	9215540 A1	17-09-1992
			EP	0573478 A1	15-12-1993
			ES	2089502 T3	01-10-1996
US 5746919	A	05-05-1998	US	5525228 A	11-06-1996
WO 8900548	A	26-01-1989	DK	365387 A	15-01-1989
			WO	8900548 A1	26-01-1989
			NZ	225414 A	27-11-1990
DE 19809299	A	09-09-1999	DE	19809299 A1	09-09-1999
EP 0218896	A	22-04-1987	CH	665138 A5	29-04-1988
			AT	56045 T	15-09-1990
			DE	3673743 D1	04-10-1990
			EP	0218896 A1	22-04-1987
DE 19623163	A	05-12-1996	DE	19623163 A1	05-12-1996
DE 19625288	A	09-01-1997	DE	19625288 A1	09-01-1997

Source: [All Sources](#) > [Area of Law - By Topic](#) > [Patent Law](#) > [Patents](#) > [Non-U.S. Patents](#) > [European Patents](#), Patent Abstracts of Japan and PCT Patents 
Terms: "2000015229" ([Edit Search](#))

☒ Select for FOCUS™ or Delivery



10189533 2000015229 (Note: This is a Patent Application only.)

COPYRIGHT: 2000, JPO & Japio
PATENT ABSTRACTS OF JAPAN

2000015229

(Note: This is a Patent Application only.)

◆ [Get Exemplary Drawing](#)
[Access PDF of Official Patent.](#)
(Note: Cost incurred in a later step)

The Adobe Acrobat Reader must be installed on your computer to access Official Patent text.
If you do not have this FREE reader, you can download it now from www.adobe.com.

January 18, 2000

METHOD FOR TREATING ORGANIC WASTE

INVENTOR: SHIBATA TOSHIYUKI ; YAMAMOTO TETSUYA ; SOEDA YUJI ; MORO MASASHI

 **APPL-NO:** 10189533

FILED-DATE: July 6, 1998

ASSIGNEE-AT-ISSUE: KUBOTA CORP

PUB-TYPE: January 18, 2000 - Un-examined patent application (A)

PUB-COUNTRY: Japan (JP)

IPC-MAIN-CL: B09B00300


IPC ADDL CL: C05F01700 , C02F01104

ENGLISH-ABST:

PROBLEM TO BE SOLVED: To provide a method for treating organic waste which can separate fermentation unsuitable substances such as phosphorus and fish bones and attempt the effective use and efficient treatment of separated phosphorus.

SOLUTION: A mixture 9 of crushed garbage 7, excrement, sewage purifier sludge, and others is led to a two-liquid flocculating/dewatering process and, after phosphorus contained in the mixture 9 being flocculated, separated into solids 12 containing flocculated phosphorus and separated liquid 13. The separated solids 12 are led to a composting process, fermented under aerobic conditions, and recovered as compost 14. The separated liquid 13 is led to an anaerobic fermentation process and fermented under anaerobic conditions, and biogas 15 such as generated methane is recovered. In this way, good compost 14 containing enough

amounts of nitrogen and phosphorus effective as fertilizer components can be obtained. A phosphorus-removing operation is unnecessary for dewatered filtrate 18 separated from digested sludge 16.

Source: [All Sources](#) > [Area of Law - By Topic](#) > [Patent Law](#) > [Patents](#) > [Non-U.S. Patents](#) > [European Patents, Patent Abstracts of Japan and PCT Patents](#) 

Terms: "2000015229" ([Edit Search](#))

View: Full

Date/Time: Tuesday, July 9, 2002 - 2:25 PM EDT

[About LexisNexis](#) | [Terms and Conditions](#)

Copyright © 2002 LexisNexis, a division of Reed Elsevier Inc. All rights reserved.